

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0351500310](#)
Status: **Active**
Overview: [versablade](#)
Description: 7.30mm (.287") Pitch Wire-to-Wire VersaBlade™ Hybrid Plug Housing, with Mounting Ears, 3 Circuits, Polyester UL94V-0, Natural

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR19980
TUV	R72090206
UL	E29179

General

Product Family	Crimp Housings
Series	35150
Comments	Polarized to Mating Part, Positive Lock
Overview	versablade
Product Name	VersaBlade™

Physical

Circuits (maximum)	3
Color - Resin	Natural
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Polyester
Number of Rows	1
Packaging Type	Bag
Panel Mount	Yes
Pitch - Mating Interface (in)	0.287 In
Pitch - Mating Interface (mm)	7.30 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +120°C

Electrical

Current - Maximum per Contact	15A
-------------------------------	-----

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-35150-031*
---------------	---------------

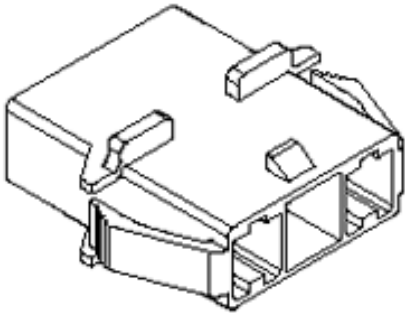


image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[35150Series](#)

Mates With

[35151-031*](#) Receptacle Housing

Use With

VersaBlade™ Crimp Terminals, [35745](#) ,
[35747](#) , [35746](#) <BR [351500290](#) TPA™

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F




E

D

C




B

A

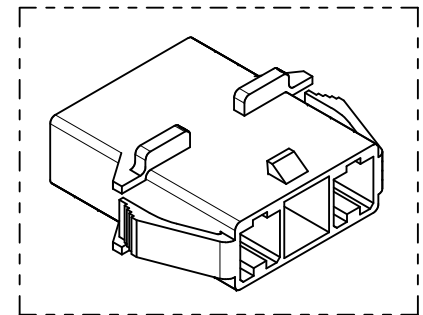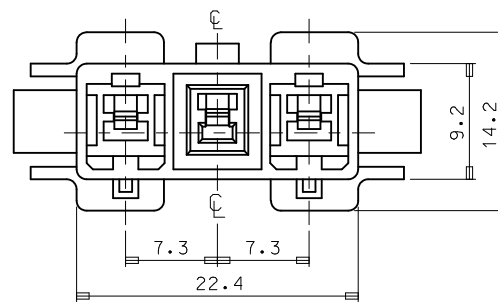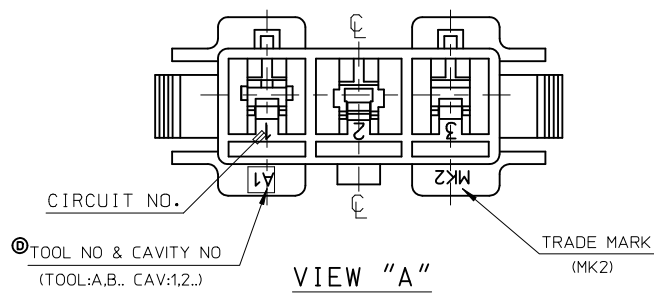

NOTES.

1. MATERIAL & COLOR : SEE TABLE
2. MATED HOUSING : 35151-031*
3. APPLICABLE TERMINAL : 35745-0*10 (1 CIRCUIT)
35746-0*10 (2 CIRCUIT)
35747-0*10 (3 CIRCUIT)
4. APPLICABLE T.P.A : 35150-039*
5. PRODUCT SPECIFICATION : PS-35150-003

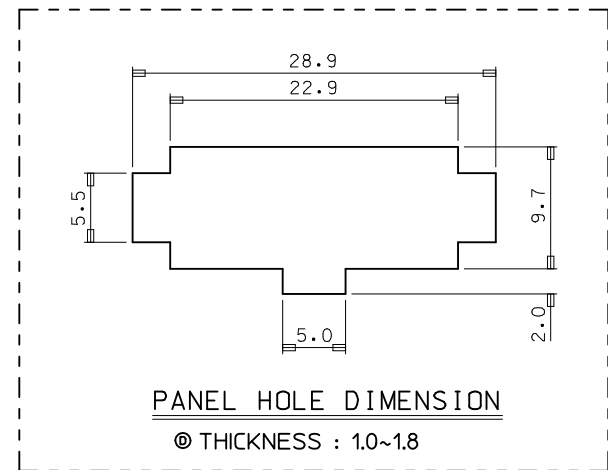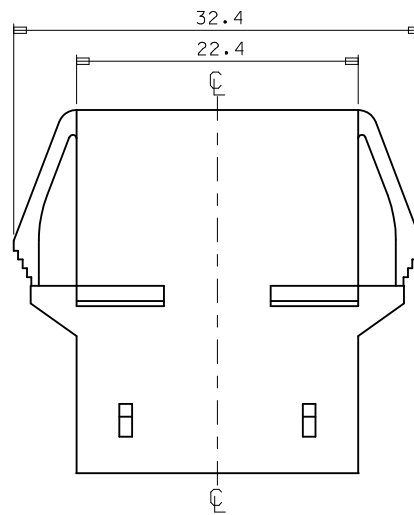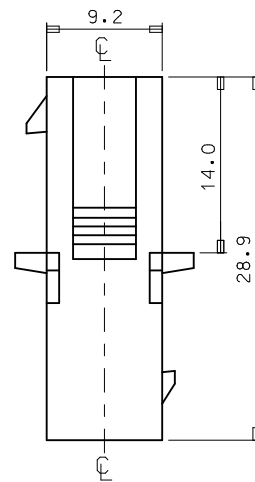

NO	PRODUCT		MATERIAL
	PART NO	COLOR	DESCRIPTION
1	35150-0310	NATURAL	POLYESTER (PBT) (UL94V-0)
2	35150-0314	BLUE	
3	35150-0319	NATURAL	
4	35150-2319	RED	PC/PET (UL94V-0)
5	35150-3319	YELLOW	
6	35150-4319	BLUE	

REVISED EC NO: KOR2010-0092 DRWN: JHPARK01 2010/01/14 CHKD: WY. YANG 2010/01/14 APPR: YUNSIKKIM 2010/01/14 REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
			mm		INCH		DRAWN BY JS.KANG		DATE		TITLE 7.3 PITCH W/W CONN MALE HSG-3P(W/EAR)	
			4 PLACES ± ---		± ---		CHECKED BY		DATE			
			3 PLACES ± ---		± ---		APPROVED BY		DATE			
			2 PLACES ± ---		± ---							
			1 PLACE ± 0.3		± ---		MOLEX INCORPORATED		MOLEX INCORPORATED			
			ANGULAR ± 1 °									
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
							SEE TABLE		SD-35150-031*		1 OF 01	
							SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

9 8 7 6 5 4 3 2 1