

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0039000339

Status:

Active

Overview:


standard_062

Description:

1.57mm (.062") Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1855, 3.68mm (.145") Pitch, Female, Tin (Sn) Plated Brass Contact, 22-28 AWG, Bag

Documents:	
Drawing (PDF)	Product Specification PS-1855-003 (PDF)
Product Specification PS-1855-002 (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	Crimp Terminals
Series	1855
Crimp Quality Equipment	Yes
Overview	standard_062
Product Name	Standard .062"
Physical	
Gender	Female
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Packaging Type	Bag
Plating min: Mating (µin)	35
Plating min: Mating (µm)	0.88
Plating min: Termination (µin)	35
Plating min: Termination (µm)	0.88
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.10-1.50mm (.043-.059")
Wire Size AWG	22, 24, 26, 28
Wire Size mm²	N/A
Material Info	
Old Part Number	1855TL
Reference - Drawing Numbers	
Packaging Specification	SPK-1855-001
Product Specification	PS-1855-002, PS-1855-003
Sales Drawing	SD-1855*

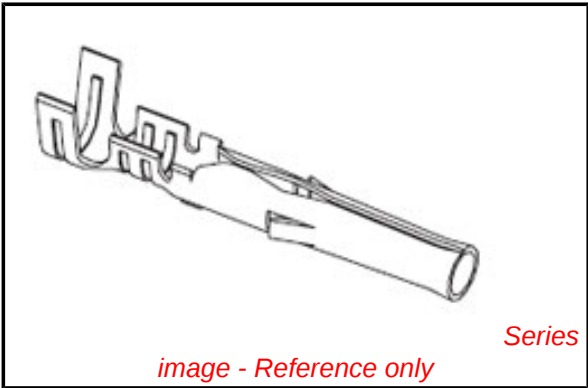

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

1855Series

Use With

1625nr Receptacle Housing

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Crimp Tool	0638190800
Manual Extraction Tool	0011030002

Japan

Description	Product #
Hand Crimp Tool	0011260009
JHTR2262A	

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

1. 一般公差: ± 0.4
GENERAL TOLERANCES: ± 0.4



RE
L

EN-0 IC(032)MXJ-32