




Polyester (Mylar) and Foil Capacitors

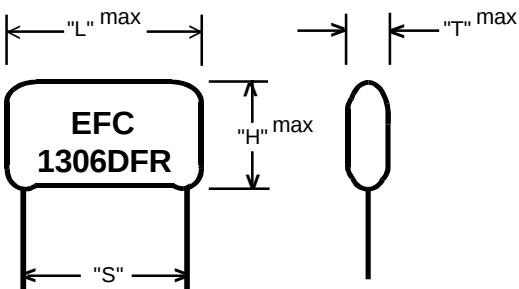

1306DFR

**Epoxy Dipped
(Radial Leads)**

Lead Specs. - Tinned Copperweld

<u>L</u>	<u>S</u>	<u>DIA.</u>
10.5	7.5	0.6
13.0	10.0	0.6
18.5	15.0	0.8
26.0	22.5	0.8
31.0	27.5	0.8
44.0	38.0	1.0

(All dimensions in millimeters)

DIMENSIONS and RATINGS

Cap.	1306DFR-3 100 VDC			1306DFR-3 160 VDC			1306DFR-3 250 VDC			1306DFR-3 400 VDC			1306DFR-3 630 VDC			1306DFR-3 1000 VDC			
μF	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L	
.001	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	9.0	10.5	4.5	9.0	13.0	
.0012	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.0	9.0	10.5	4.0	9.0	10.5	4.5	9.5	13.0	
.0015	4.0	8.0	10.5	4.0	8.0	10.5	4.0	8.0	10.5	4.5	9.0	10.5	4.5	9.5	10.5	5.0	10.0	13.0	
.0022	4.0	8.0	10.5	4.5	8.0	10.5	4.5	8.5	10.5	4.5	9.0	10.5	4.5	9.5	13.0	5.5	11.0	13.0	
.0027	4.0	8.0	10.5	4.5	8.0	10.5	4.5	8.5	10.5	4.5	9.0	10.5	5.0	10.0	13.0	5.5	11.5	13.0	
.0039	4.5	8.0	10.5	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	10.5	5.5	11.0	13.0	6.0	12.5	13.0	
.0047	4.5	8.5	10.5	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.5	10.5	6.0	12.0	13.0	5.5	11.0	18.5	
.0056	4.5	8.5	10.5	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.5	13.0	6.5	12.5	13.0	6.0	11.5	18.5	
.0068	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	10.5	5.0	10.0	13.0	5.0	10.0	18.5	6.0	12.5	18.5	
.0082	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	13.0	5.5	10.5	13.0	5.5	11.0	18.5	7.0	13.0	18.5	
.01	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	13.0	5.5	11.0	13.0	6.0	12.0	18.5	7.5	14.0	18.5	
.012	4.5	9.0	10.5	4.5	9.0	10.5	4.5	9.0	13.0	6.0	12.0	13.0	6.5	12.5	18.5	8.0	14.5	18.5	
.015	4.5	9.0	10.5	4.5	9.0	13.0	5.0	10.0	13.0	6.5	12.5	13.0	7.0	13.0	18.5	9.0	16.5	18.5	
.018	4.5	9.0	10.5	4.5	9.5	13.0	5.5	11.0	13.0	5.5	11.0	18.5	7.5	13.5	18.5	8.0	14.0	26.0	
.022	4.5	9.0	10.5	5.0	10.0	13.0	6.0	12.0	13.0	6.0	12.0	18.5	8.0	14.5	18.5	8.5	15.5	26.0	
.027	4.5	9.0	13.5	5.5	11.0	13.0	5.0	10.0	18.5	6.5	12.5	18.5	7.5	13.5	26.0	9.0	16.5	26.0	
.033	5.0	9.5	13.0	6.0	12.5	13.0	5.5	10.5	18.5	7.5	13.5	18.5	8.5	15.5	26.0	9.5	18.0	26.0	
.039	5.0	10.0	13.0	5.0	10.0	18.5	5.5	11.0	18.5	8.0	14.0	18.5	9.0	16.5	26.0	10.0	19.0	26.0	
.047	5.5	11.0	13.0	5.5	10.5	18.5	6.0	12.0	18.5	8.5	15.5	18.5	9.5	18.0	26.0	10.0	19.0	31.0	
.056	6.0	12.0	13.0	5.5	11.0	18.5	6.5	12.5	18.5	7.5	13.5	26.0	9.0	16.5	31.0	10.5	20.0	31.0	
.068	6.5	12.5	13.0	6.0	12.0	18.5	7.0	13.0	18.5	8.0	14.0	26.0	9.5	17.0	31.0	12.0	22.0	31.0	
.082	5.0	10.0	18.5	6.5	12.5	18.5	7.5	14.0	18.5	8.5	15.5	26.0	10.0	19.0	31.0	12.5	23.0	31.0	
.1	5.5	11.0	18.5	7.5	13.5	18.5	8.5	15.5	18.5	9.0	16.5	26.0	10.5	20.0	31.0	15.0	27.0	31.0	
.12	6.0	12.0	18.5	8.0	14.0	18.5	8.0	14.0	26.0	9.5	18.0	26.0	11.5	22.0	31.0	13.5	24.0	36.0	
.15	6.5	12.5	18.5	8.5	16.0	18.5	8.5	15.5	26.0	9.5	18.0	31.0	14.0	24.0	31.0	15.0	27.0	36.0	
.18	7.5	13.5	18.5	8.0	14.0	26.0	9.0	16.5	26.0	10.0	19.0	31.0	13.0	23.0	36.0	14.5	26.0	44.0	
.22	8.5	15.5	18.5	8.5	15.5	26.0	9.5	18.0	26.0	11.5	20.0	31.0	15.0	26.0	36.0	16.0	28.0	44.0	
.27	8.0	14.0	26.0	9.0	16.5	26.0	9.5	18.0	31.0	12.5	22.0	31.0	16.0	28.0	36.0				
.33	8.5	15.5	26.0	9.5	18.0	26.0	10.0	20.0	31.0	13.0	23.0	36.0	16.0	28.0	44.0				
.39	9.0	16.5	26.0	9.5	18.0	31.0	11.0	21.0	31.0	13.5	25.0	36.0	16.5	30.0	44.0				
.47	9.5	18.0	26.0	10.0	20.0	31.0	12.0	22.0	31.0	15.0	27.0	36.0	18.0	32.0	44.0				
.56	9.0	16.5	31.0	11.0	21.0	31.0	13.0	24.0	31.0	14.0	25.0	44.0							
.68	9.5	18.0	31.0	12.5	22.0	31.0	13.0	24.0	31.0	15.0	27.0	44.0							
.82	10.5	20.0	31.0	13.0	24.0	31.0	14.5	26.0	36.0	16.5	30.0	44.0							
1.0	12.5	24.0	31.0	15.0	26.0	31.0	14.5	26.0	44.0	18.0	32.0	44.0							

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629 * E-Mail: efc@filmcapacitors.com * FAX (203) 755-0659