

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0003092062](#)
Status: **Active**
Overview: [standard_093](#)
Description: 2.36mm (.093") Diameter Standard .093 Pin and Socket Plug Housing, 6 Circuits, Dual Row

Documents:

3D Model	Product Specification PS-02-09 (PDF)
Packaging Specification (PDF)	Product Specification PS-43660-9999 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Crimp Housings
Series	1261
Comments	14.0A max. can be achieved when housing is used with 42477 or 42478 terminals
Overview	standard_093
Product Name	Standard .093"

Physical

Circuits (maximum)	6
Color - Resin	Natural
Flammability	94V-2
Gender	Dual
Glow-Wire Compliant	No
Material - Resin	Nylon
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.198 In
Pitch - Mating Interface (mm)	5.03 mm
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical

Current - Maximum per Contact	11A
-------------------------------	-----

Material Info

Old Part Number	1261-P1
-----------------	---------

Reference - Drawing Numbers

Packaging Specification	PK-1261-001
Product Specification	PS-02-09, PS-43660-9999
Sales Drawing	SD-1261-*




image - Reference only

Series

EU RoHS

ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status

China RoHS



Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series


[1261](#)Series

Mates With





[1261r](#)

Use With

[1189](#) Crimp Terminals, [1190](#) Crimp Terminals, [1376](#) Male PC Tail Terminals, [1377](#) Female PC Tail Terminals, [1380](#) Male Crimp Terminals, [1381](#) Female Crimp Terminals, [1433](#) Crimp Terminals, [1434](#) Male Crimp Terminals, [1973](#) , [2151](#) , [2273](#) , [2870](#) , [2871](#) , [4272](#) , [4550](#) , [6271](#) , [6310](#) , [42477](#) , [42478](#)




- OPTIONAL MOUNTING EAR
(PREBENT SHOWN) &
RIB, SEE DETAIL 3 & 4



$$\frac{.422}{(10.72)}$$
$$\begin{array}{r} 1 \\ 1.00 \\ \hline (25.4) \end{array}$$

$$- \frac{0.668}{(16.97)}$$


—OPTIONAL MOUNTING EAR
(PREBENT SHOWN)
SEE DETAIL 3 & 4

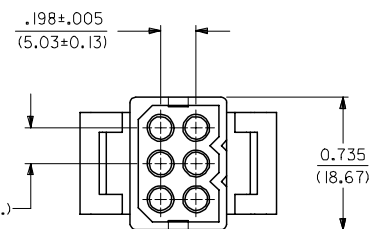

—OPTIONAL LOCK RAMP




—CIRCUIT I.D.
(3 PL.) $\triangle$
6

$$\leftarrow \frac{0.632}{(16.05)}$$


RECEPTACLE


$$\frac{.198 \pm .005}{(5.03 \pm 0.13)} \quad (2 \text{ PL.})$$


PLUG


$$\frac{.198 \pm .005}{(5.03 \pm 0.13)} (2 \text{ PL.})$$

REVISED NOTES EC NO: UCP2006-2424 DRW:PRI DIER CHK:K:AEI/HAG APPR:FSM/TH	2006/06/08 2006/06/08 2006/06/09	DESCRIPTION ▼=0 ▽=0	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY	DATE	TITLE			
				4 PLACES	± ---	± ---	GWC	11/6/89	.0931/(2.36) HOUSING, PLUG AND RECEPTACLE, 6 CKT., .198/(5.03)CTRS.			
				3 PLACES	± ---	± .007	CHECKED BY	DATE				
				2 PLACES	± 0.18	± 0.10	RW	11/6/89				
				1 PLACE	± 0.25	± ---	APPROVED BY	DATE	MOLEX INCORPORATED			
				ANGULAR ± 2 °		GWF	11/6/89					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-1261-*		SHEET NO. 1 OF 2		
						SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
				X3	REV							

