

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0875681274

Status:

Active

Description:

2.00mm (.079") Pitch Milli-Grid™ Cable-to-Board Receptacle, Dual Row, IDT, Lead-free, 12 Circuits, 0.76mm (.030") Gold (Au) Selective Plating, without Center Polarization Key, with Locking Friction Ramp

Documents:

3D Model

Drawing (PDF)

Product Specification PS-87568-004 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Series

Crimp Quality Equipment

Product Name

Use With

IDT and Solder Connectors

87568

Yes

Milli-Grid™

87569-1012 Strain Relief (Optional)

Physical

Circuits (Loaded)

Color - Resin

Durability (mating cycles max)

Flammability

Gender

Glow-Wire Compliant

Lock to Mating Part

Material - Metal

Material - Resin

Number of Rows

Packaging Type

Panel Mount

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Polarized to Mating Part

Stackable

Temperature Range - Operating

Termination Interface: Style

Wire Size AWG

12

Black

100

94V-0

Female

No

Yes

Copper Alloy

Polyester

2

Tray

No

0.079 In

2.00 mm

Yes

No

-20°C to +85°C

IDT or Pierce

28

Electrical

Current - Maximum per Contact

Voltage - Maximum

1A

125V

Material Info

Reference - Drawing Numbers

Product Specification

Sales Drawing

PS-87568-004

SD-87568-003

Series

image - Reference only

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

87568Series

Mates With

87831 Vertical PCB Header, 87832 Surface Mount PCB Header, 87833 Right Angle PCB Header

Application Tooling | FAQ


Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
IDT Ribbon Cable Adapter Kit For 2.00mm Milli-Grid™	0621002400
IDT - Manual - Handtool	0621002000
Manual Press with IDT Ribbon Cable Tool Kit	0621002200

This document was generated on 04/20/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

F
E
D
C
B
A

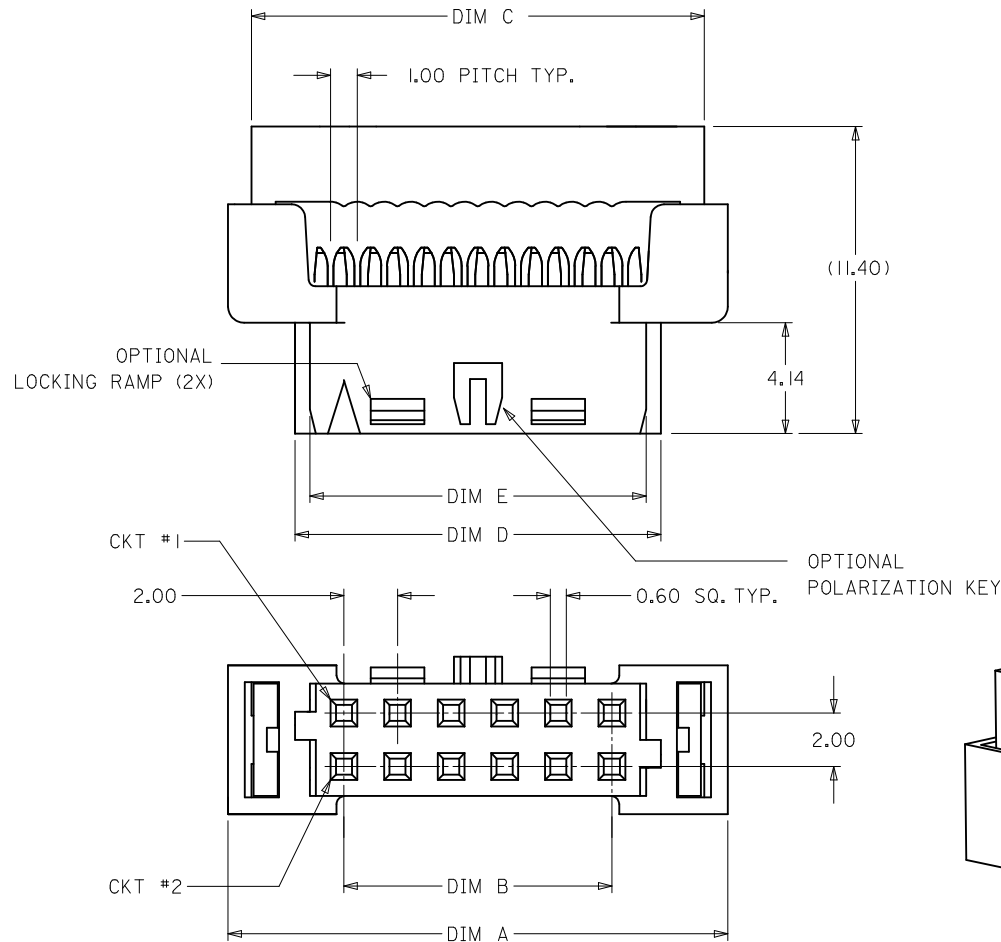


1. MATERIALS:
HOUSING - PBT. GLASS FILLED UL94V-0 BLACK
TERMINAL - COPPER ALLOY
2. FINISHES
PLATING 3 - 15uin (0.38um) SELECTIVE GOLD IN CONTACT AREA
AND 75uin (1.88um) TIN IN IDT AREA OVER 50uin (1.25um)
NICKEL OVERALL.
PLATING 4 - 30uin (0.76um) SELECTIVE GOLD IN CONTACT AREA
AND 75uin (1.88um) TIN IN IDT AREA OVER 50uin (1.25um)
NICKEL OVERALL.
3. PRODUCT SPEC PS-87568-004 APPLIES
4. FOR ILLUSTRATION PURPOSES, I2 CKT IS SHOWN
5. PART MATES WITH ALL MILLIGRID HEADERS WITH MATING LENGTH
BETWEEN 2.50mm AND 4.20mm
6. PART IS DESIGNED FOR 1.00mm PITCH FLAT CABLE, 7 STRANDS,
AWG #28, UL2651 AND UL2678
7. ALL OTHER CIRCUIT SIZES, CONTACT FACTORY.
8. STRAIN RELIEF TO BE PURCHASED SEPERATELY,
REFER TO SD-87569-008


ADD 32CKT OPTION EC NO: S2010-0273 DRWN:SKANG CHKD:ATSEE APPR:MLONG H1	DESCRIPTION 2009/09/28 2009/11/13 2009/11/17	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY	DATE	TITLE MGRID 2MM DUAL ROW IDT RECEPTACLE					
			4 PLACES	± ---	± ---	AGARWAL	1997/08/05						
			3 PLACES	± ---	± ---	CHECKED BY	DATE	MOLEX INCORPORATED					
			2 PLACES	± 0.15	± ---	SQUEK	1997/09/03						
			1 PLACE	± ---	± ---	APPROVED BY	DATE	SD-87568-003					
			ANGULAR ± 3 °			MLONG	2009/11/13						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-87568-003		SHEET NO. 1 OF 3			
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

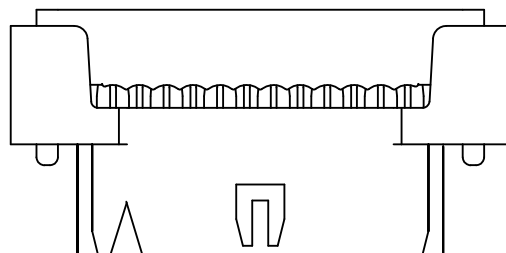


87568-***4*
POLARIZATION ONLY
(APPLICABLE FOR 14 TO 50 CKT)

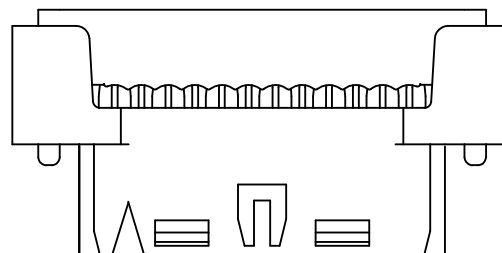

87568-***9*
POLARIZATION AND RAMP LOCKING
(APPLICABLE FOR 14 TO 50 CKT)

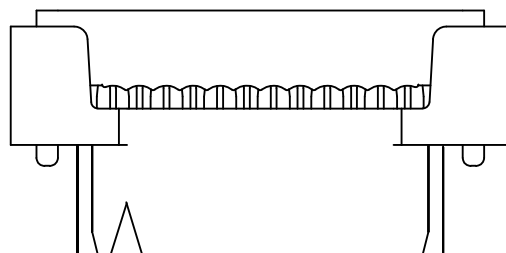

87568-***6*
NO POLARIZATION/RAMP FEATURE
(APPLICABLE FOR 10 TO 50 CKT)

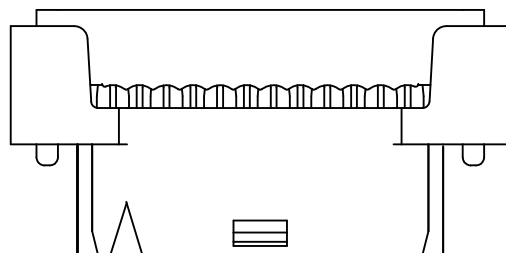

87568-**7*
SINGLE RAMP LOCKING ONLY
(APPLICABLE FOR I0 TO I2 CKT)

ENGINEERING NUMBER	CKT. SIZE	A	B	C	D	E
87568-10**	10	16.65	8.00	14.90	11.65	10.55
87568-12**	12	18.65	10.00	16.90	13.65	12.55
87568-14**	14	20.65	12.00	18.90	15.65	14.55
87568-16**	16	22.65	14.00	20.90	17.65	16.55
87568-20**	20	26.65	18.00	24.90	21.65	20.55
87568-22**	22	28.65	20.00	26.90	23.65	22.55
87568-24**	24	30.65	22.00	28.90	25.65	24.55
87568-26**	26	32.65	24.00	30.90	27.65	26.55
87568-30**	30	36.65	28.00	34.90	31.65	30.55
87568-32**	32	38.65	30.00	36.90	33.65	32.55
87568-34**	34	40.65	32.00	38.90	35.65	34.55
87568-36**	36	42.65	34.00	40.90	37.65	36.55
87568-40**	40	46.65	38.00	44.90	41.65	40.55
87568-44**	44	50.65	42.00	48.90	45.65	44.55
87568-50**	50	56.65	48.00	54.90	51.65	50.55

87568 - * * * *
 CKT. SIZE ————
 PLATING OPTION
 (SEE NOTE 2)
 POLARIZATION KEY
 & LOCKING RAMP OPTION

4 - WITH POLARIZATION ONLY FOR I4 - 50 CKT
6 - WITHOUT POLARIZATION AND RAMP LOCKING
7 - WITH SINGLE RAMP LOCKING ONLY FOR I0 & I2 CKT
9 - WITH POLARIZATION AND RAMP LOCKING FOR I4 - 50 CKT

10-12 CIRCUIT SIZE HAS ONLY ONE RAMP
FOR LOCKING (OPTIONAL)

14-50 CIRCUIT SIZE HAS BOTH
POLARIZATION AND RAMP LOCKING (OPTIONAL)

ADD 32CKT OPTION EC NO: S2010-0273 DRWN:KANG CHKD:ATSEE APPR:MLONG H1	2009/09/28 2009/11/13 2009/11/17	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																										
			$\nabla_A=0$	<table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>$\pm$---</td><td>$\pm$---</td></tr><tr><td>3 PLACES</td><td>$\pm$---</td><td>$\pm$---</td></tr><tr><td>2 PLACES</td><td>± 0.15</td><td>$\pm$---</td></tr><tr><td>1 PLACE</td><td>$\pm$---</td><td>$\pm$---</td></tr></table>		mm	INCH	4 PLACES	$\pm$ ---	$\pm$ ---	3 PLACES	$\pm$ ---	$\pm$ ---	2 PLACES	± 0.15	$\pm$ ---	1 PLACE	$\pm$ ---	$\pm$ ---	<table><tr><td>DRAWN BY</td><td>DATE</td></tr><tr><td>AGARWAL</td><td>1997/08/05</td></tr><tr><td>CHECKED BY</td><td>DATE</td></tr><tr><td>SQUEK</td><td>1997/09/03</td></tr><tr><td>APPROVED BY</td><td>DATE</td></tr><tr><td>MLONG</td><td>2009/11/13</td></tr></table>	DRAWN BY	DATE	AGARWAL	1997/08/05	CHECKED BY	DATE	SQUEK	1997/09/03	APPROVED BY	DATE	MLONG	2009/11/13	TITLE MGRID 2MM DUAL ROW IDT RECEPTACLE			
				mm	INCH																															
			4 PLACES	$\pm$ ---	$\pm$ ---																															
			3 PLACES	$\pm$ ---	$\pm$ ---																															
			2 PLACES	± 0.15	$\pm$ ---																															
			1 PLACE	$\pm$ ---	$\pm$ ---																															
			DRAWN BY	DATE																																
			AGARWAL	1997/08/05																																
			CHECKED BY	DATE																																
SQUEK	1997/09/03																																			
APPROVED BY	DATE																																			
MLONG	2009/11/13																																			
$\nabla_E=0$			MOLEX MOLEX INCORPORATED																																	
$\nabla_P=0$	ANGULAR $\pm 3^\circ$																																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-87568-003		SHEET NO. 2 OF 3																														
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																		

F

F

E

E

D

D

C


C

B



B

A

A

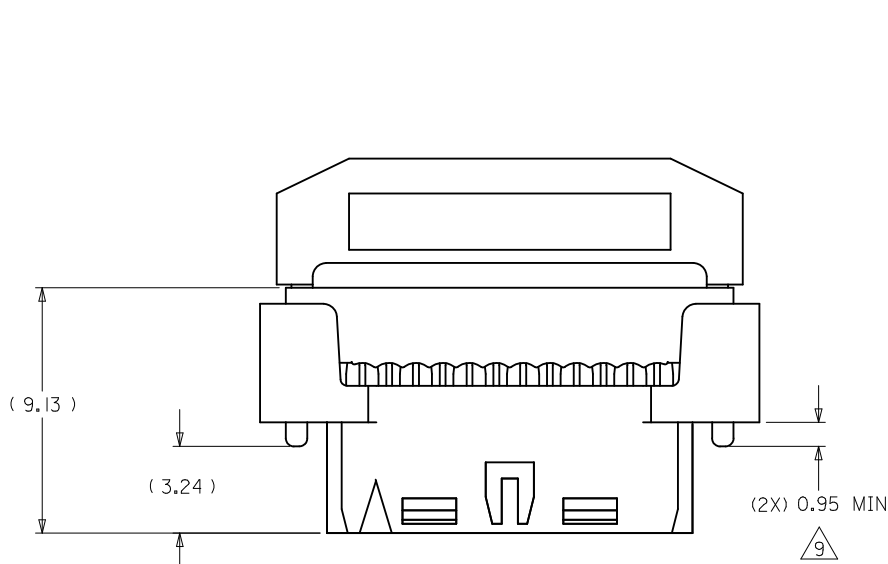

CABLE LOADED ASSEMBLY
WITH STRAIN RELIEF

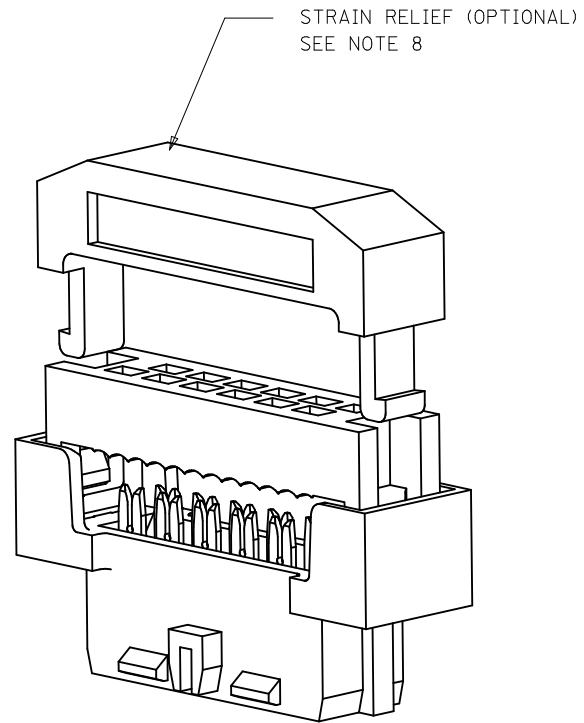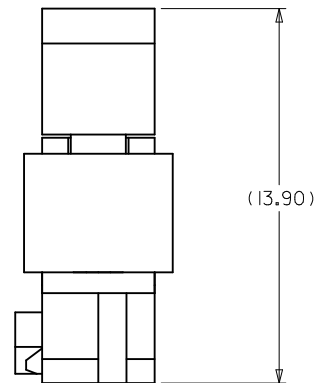

3D VIEW
(12 CKT SHOWN
FOR ILLUSTRATION ONLY)

NOTES

9 THIS DIMENSION IS TO ENSURE GOOD CABLE TERMINATION.

ADD 32CKT OPTION				EC NO: S2010-0273		2009/09/28		2009/11/13		2009/11/17		DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE NTS		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION				
														=0	4 PLACES	± ---	± ---	DRAWN BY AGARWAL		DATE 1997/08/05		TITLE MGRID 2MM DUAL ROW IDT RECEPTACLE					
														=0	3 PLACES	± ---	± ---	CHECKED BY SQUEK		DATE 1997/09/03							
														=0	2 PLACES	± 0.15	± ---	APPROVED BY MLONG		DATE 2009/11/13							
														=0	1 PLACE	± ---	± ---	MOLEX		MOLEX INCORPORATED							
														ANGULAR ± 3 °			MATERIAL NO.		DOCUMENT NO.		SHEET NO.						
														DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE		SD-87568-003				3 OF 3				
																	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									