




Micro Spring™ Air Core Inductors

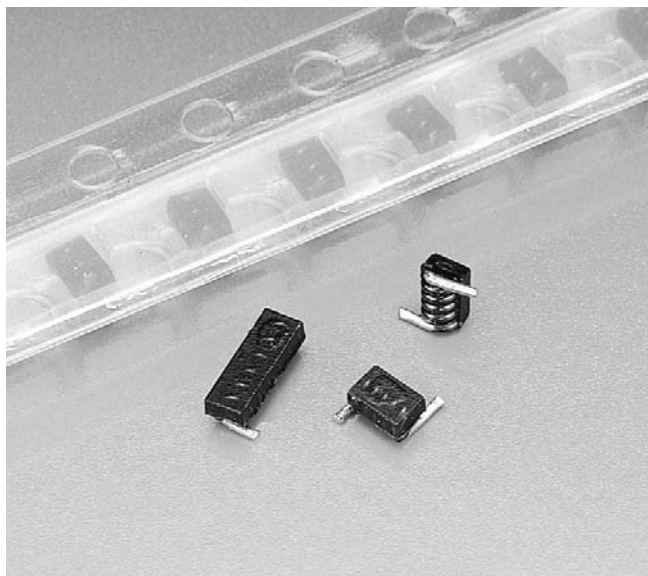

- Small air core inductors feature high Q and tight tolerances
- Acrylic jacket provides a flat top for pick and place
- Solder coated leads ensure reliable soldering

Terminations RoHS compliant tin-silver over copper Other terminations available at additional cost.

Weight 0906: 10–12 mg; 1606: 18–27 mg

Ambient temperature –40°C to +125°C with I_{rms} current, +125°C to +140°C with derated current

Storage temperature Component: –40°C to +140°C. Packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +5 to +70 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF) One per billion hours / one billion hours, calculated per Telcordia SR-332

Packaging 0906: 500 per 7" reel Plastic tape: 8 mm wide, 0.3 mm thick, 4 mm pocket spacing, 1.5 mm pocket depth

1606: 500 per 7" reel Plastic tape: 12 mm wide, 0.3 mm thick, 4 mm pocket spacing, 1.6 mm pocket depth

PCB washing Only pure water or alcohol recommended

Part number ¹	Turns	L ² (nH)	Percent tol ³	Q ⁴ min	SRF min ⁵ (GHz)	DCR max ⁶ (mOhm)	I _{rms} ⁷ (A)
0906-2KL_	2	1.65	10	100	10.0	4.0	1.6
0906-3JL_	3	2.55	5	100	8.2	5.0	1.6
0906-4_L_	4	3.85	5,2	100	7.5	6.0	1.6
0906-5_L_	5	5.40	5,2	100	7.0	8.0	1.6
1606-6_L_	6	5.60	5,2	100	6.5	9.0	1.6
1606-7_L_	7	7.15	5,2	100	6.0	10	1.6
1606-8_L_	8	8.80	5,2	100	6.0	12	1.6
1606-9_L_	9	9.85	5,2	100	5.2	13	1.6
1606-10_L_	10	12.55	5,2	100	4.6	14	1.6

1. When ordering, specify **tolerance**, **termination** and **packaging** codes:

1606-10 **G** **L** **C**

Tolerance: **G** = 2% **J** = 5% **K** = 10% (Table shows stock tolerances in bold.)

Termination: **L** = RoHS compliant tin-silver (96.5/3.5) over copper. Special order: **T** = RoHS tin-silver-copper (95.5/4/0.5) or **S** = non-RoHS tin-lead (63/37).


Packaging: **C** = 7" machine-ready reel. EIA-481 embossed plastic tape, 500 parts per full reel.

B = Less than full reel. In tape, but not machine-ready. To have a leader and trailer added (\$25 charge), use code letter C instead.


- Inductance measured using Agilent/HP 4286 with Coilcraft SMD-A fixture and correlation.
- Tolerances in bold are stocked for immediate shipment.
- Q measured at 800 MHz, using an Agilent/HP 4291A with an Agilent/HP 16193A test fixture.
- SRF measured using an Agilent/HP 8720D with a Coilcraft SMD-D fixture.
- DCR tested on the Cambridge Technology Model 510 Micro-ohmmeter.
- Current that causes a 15°C temperature rise from 25°C ambient.
- Electrical specifications at 25°C.

See Qualification Standards section for environmental and test data.


Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

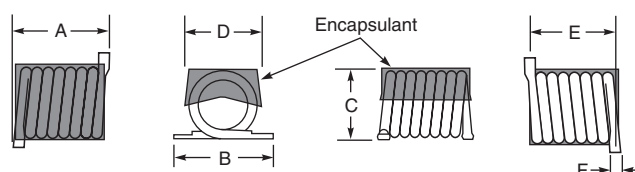

Size	A max	B max	C max	D	E	F max
0906	0.095 2,41	0.135 3,43	0.060 1,52	0.055 ±0.010 1,40 ±0,25	0.072 ±0.010 1,83 ±0,25	0.020 0,51
1606	0.165 4,19	0.135 3,43	0.062 1,58	0.055 ±0.010 1,40 ±0,25	0.144 ±0.012 3,66 ±0,30	0.020 0,51



Recommended Land Patterns

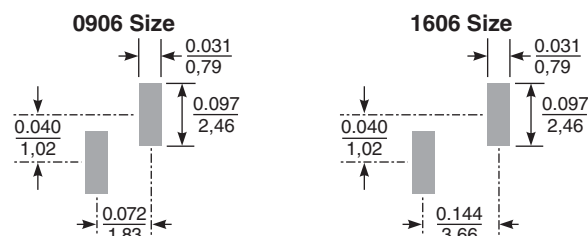

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 163-1 Revised 10/29/08


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web http://www.coilcraft.com




Micro Spring™ Air Core Inductors


Typical L vs Frequency – 0906 Series

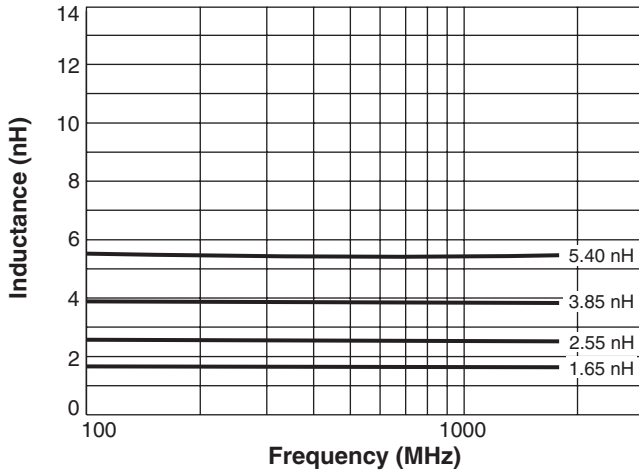


Typical L vs Frequency – 1606 Series

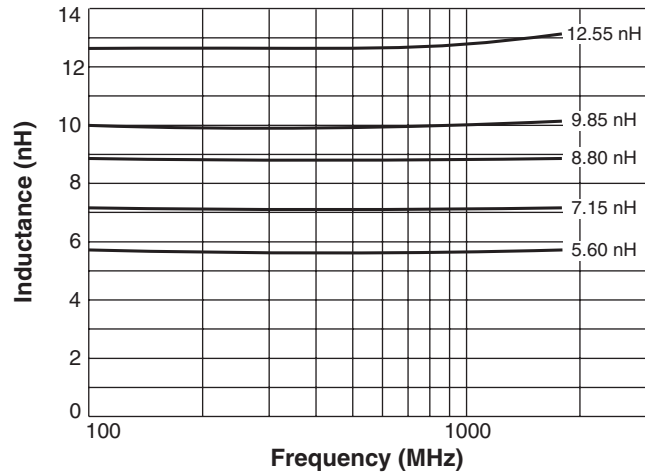


Typical Q vs Frequency – 0906 Series

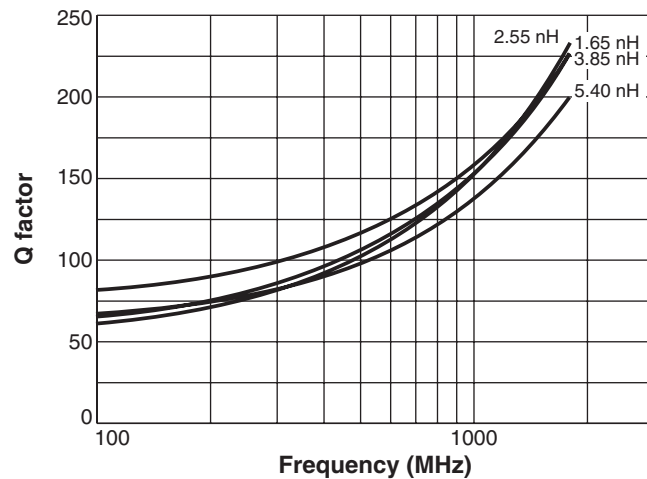

Typical Q vs Frequency – 1606 Series

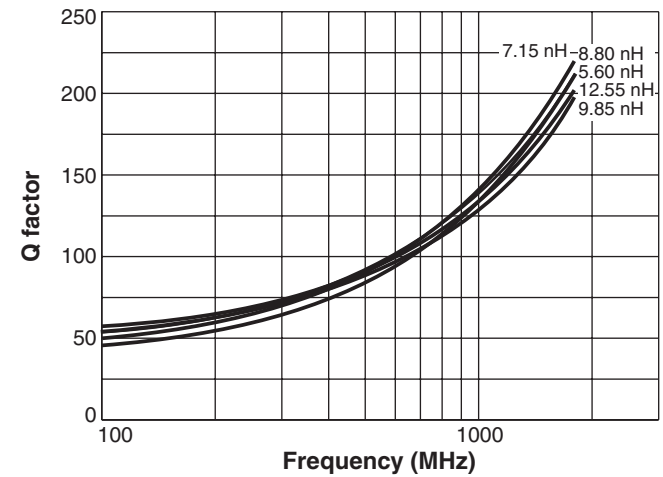

Typical Irms Derating

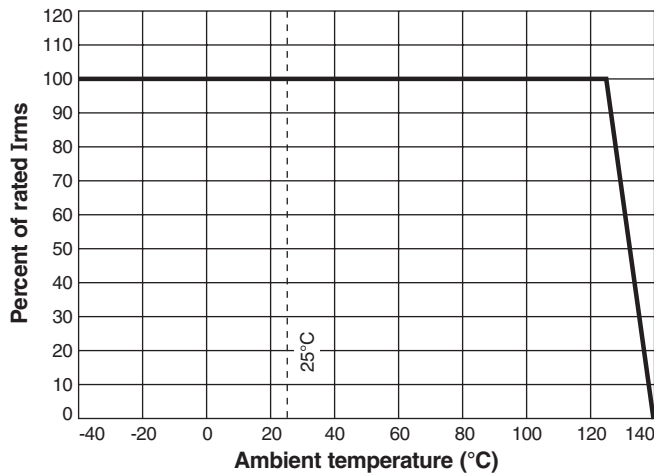

S-Parameter files
ON OUR WEB SITE OR CD

SPICE models
ON OUR WEB SITE OR CD

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 163-2 Revised 10/29/08

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>