



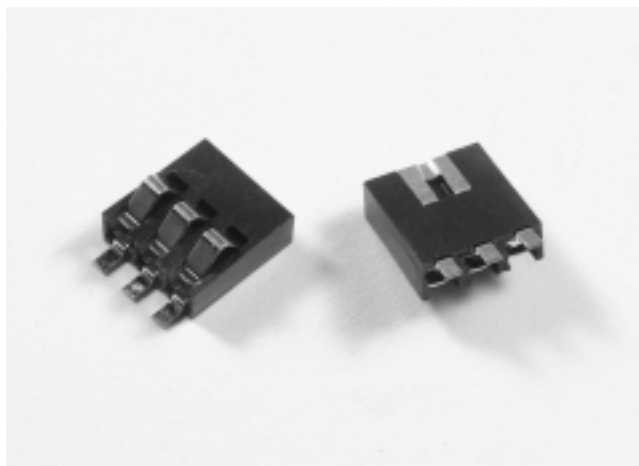

250101MA Series

Specifications:

- **Insulator Material** : Black High Temp. Plastic
- **Operating Type Range** : -40°C TO +105°C
- **Terminal Material** : Phos. Bronze
- **Platings** : Contact-Selective Gold
Plated or Full Gold Plated
- **Max. Current Rating** : 0.3A
- **Max. Voltage Rating** : 100V AC
- **Dielectric Strength** : 250V AC For 60 Seconds

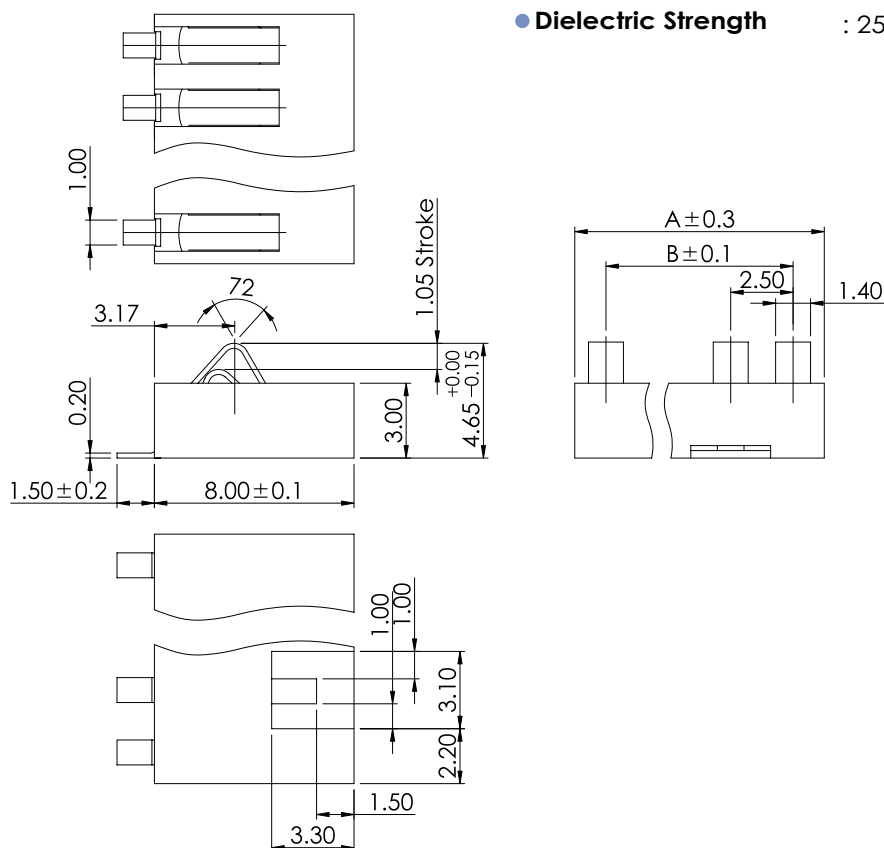


Order Information

250101MA□□□□00ZU
1 2 3 45

1. 'A' : Stright SMT Type
 2. No. of Pins.
 3. Plating
 4. Color 'Z' : Black
 5. Package
'U' : Tube Package Without CAP
- Reference Page 11

Recommended P.C.B Layout

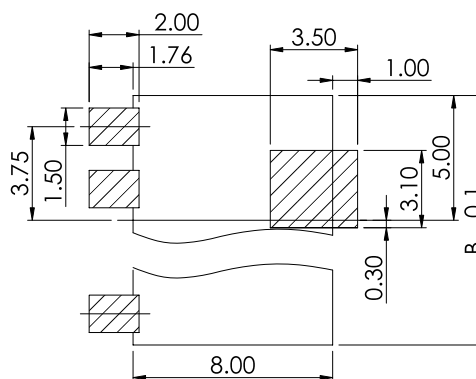

Dimension Information

SUYIN P/NO.	DIM.A	DIM.B
250101MA003□□00ZU	7.50	5.00
250101MA004□□00ZU	10.00	7.50

Mobile

BATTERY