

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0476392010](#)
Status: **Active**
Overview: [slimline_serial_ata_odd_connectors](#)
Description: 1.00mm(.039"), 1.27mm (.050") Pitch Slimline Serial ATA Plug for Optical Disk Drive, Vertical, SMT, 0.10µm (4µ") Gold (Au) Plating, with BeveledMetal Pins, Lead-free

Documents:

[3D Model](#) [Product Specification PS-47628-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR 19980
UL E29179

General

Product Family PCB Headers
Series [47639](#)
Application Board-to-Board
Comments SMT Type
Overview [slimline_serial_ata_odd_connectors](#)
Product Name Serial ATA, Slimline Serial ATA

Physical

Breakaway No
Circuits (Loaded) 13
Circuits (maximum) 13
Durability (mating cycles max) 500
First Mate / Last Break Yes
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part Yes
Keying to Mating Part Yes
Lock to Mating Part No
Material - Metal Copper Alloy
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Rows 1
Orientation Vertical
PCB Locator No
PCB Retention Yes
Packaging Type Embossed Tape on Reel
Pitch - Mating Interface (in) 0.039 In, 0.050 In
Pitch - Mating Interface (mm) 1.00 mm, 1.27 mm
Pitch - Term. Interface (in) 0.039 In, 0.050 In
Pitch - Term. Interface (mm) 1.00 mm, 1.27 mm
Plating min: Mating (µin) 4
Plating min: Mating (µm) 0.10
Plating min: Termination (µin) 39
Plating min: Termination (µm) 1
Polarized to Mating Part Yes
Polarized to PCB Yes
Stackable No
Temperature Range - Operating -35°C to +85°C
Termination Interface: Style Surface Mount

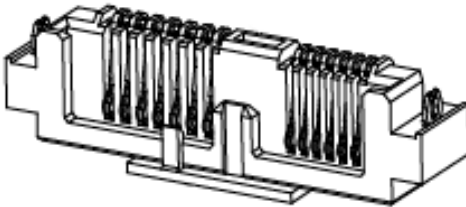


image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Halogen-Free

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

China RoHS



Search Parts in this Series

[47639Series](#)

Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	15V DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-47639-012
Product Specification	PS-47628-001
Sales Drawing	SD-47639-200

This document was generated on 05/26/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

