

ISC Silicon NPN Power Transistor

2SC2262

DESCRIPTION



- High Power Dissipation-
: $P_C= 80W(Max.)@T_C=25^{\circ}C$
- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO}= 140V(Min.)$
- Complement to Type 2SA982

APPLICATIONS

- Designed for general purpose applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	200	V
V_{CEO}	Collector-Emitter Voltage	140	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	8	A
I_B	Base Current-Continuous	3	A
P_C	Collector Power Dissipation @ $T_C=25^{\circ}C$	80	W
T_j	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature	-65~150	$^{\circ}C$

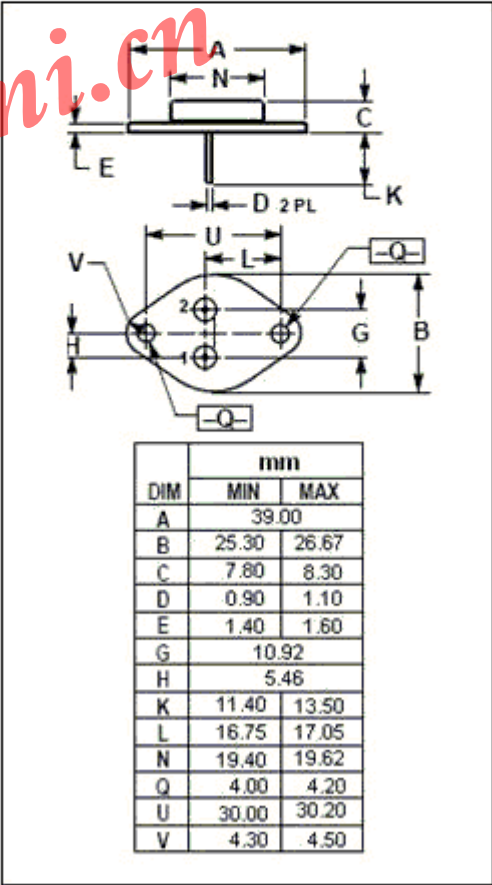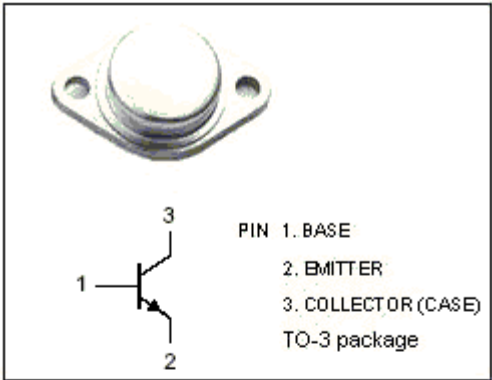

ISC Silicon NPN Power Transistor**2SC2262****ELECTRICAL CHARACTERISTICS****T_j=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = 50mA; I _B = 0	140			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 3A; I _B = 0.3A			1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = 200V; I _E = 0			1.0	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} = 6V; I _C = 0			1.0	mA
h _{FE}	DC Current Gain	I _C = 3A; V _{CE} = 4V	30			
f _T	Current-Gain—Bandwidth Product	I _E = -0.5A; V _{CE} = 12V		15		MHz

www.iscsemi.cn