


SAW Bandpass Filter 270101B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

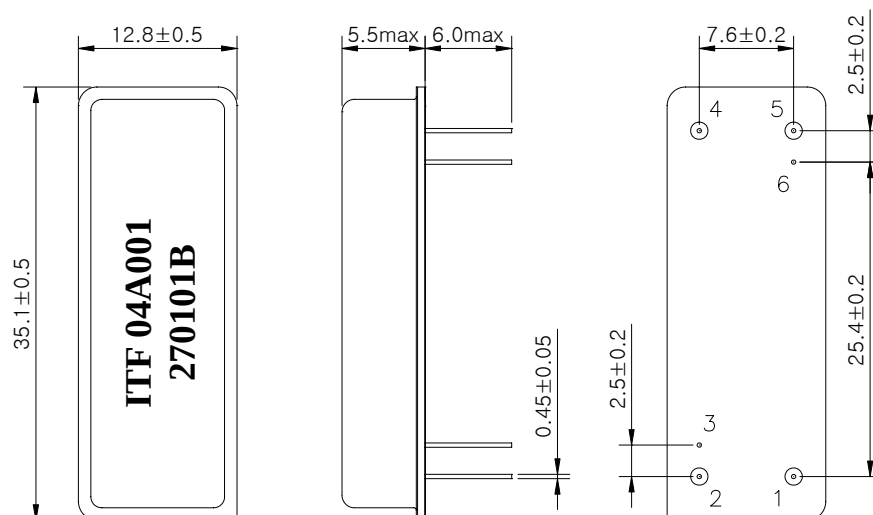

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
4	Output
2, 5	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	270101B	
		Rev. Date	2004-03-16	
		Rev.	NW3023-CS02	1/5

SAW Bandpass Filter 270101B



3. Specifications

Fo = 70 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating Temperature Range : -10℃ ~ +60℃		Minimum	Typical	Maximum
Center Frequency	MHz	69.95	70.0	70.05
Insertion Loss	dB	-	22.0	24.5
1dB Bandwidth	MHz	1.35	1.4	-
3dB Bandwidth	MHz	-	1.6	-
40dB Bandwidth	MHz	-	2.35	2.4
Amplitude Ripple (Fo +/- 0.615 MHz)	dB	-	0.5	1.0
Group Delay Variation (Fo +/- 0.615 MHz)	nsec	-	120	250
Absolute Delay	usec	-	3.23	3.3
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	270101B	
		Rev. Date	2004-03-16	
		Rev.	NW3023-CS02	2/5

SAW Bandpass Filter 270101B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

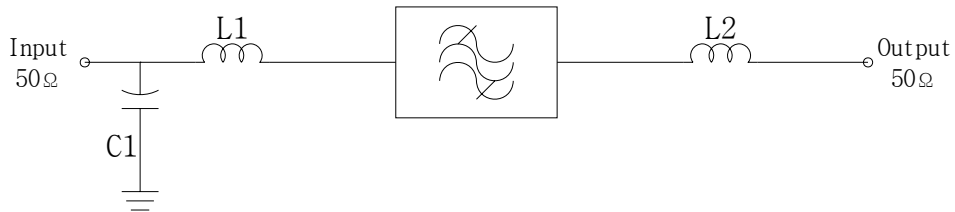

L1 = 270 nH, L2 = 270 nH

C1 = 47pF

5. Marking Configuration

ITF¹⁾ 04A001²⁾

270101B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	270101B	
		Rev. Date	2004-03-16	
		Rev.	NW3023-CS02	3/5

SAW Bandpass Filter 270101B







6. Typical Performance (at +25℃)

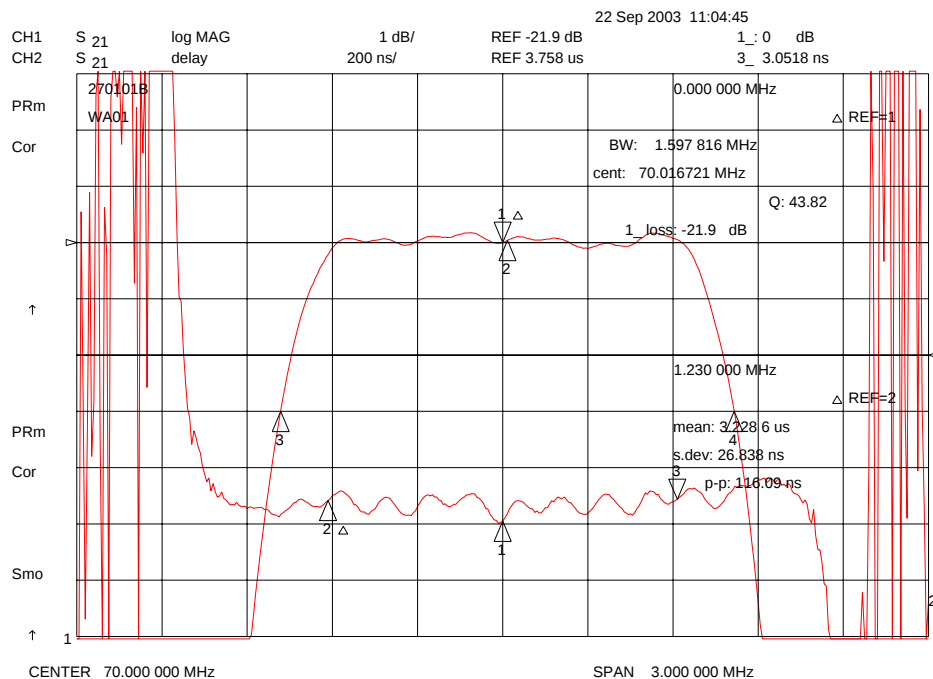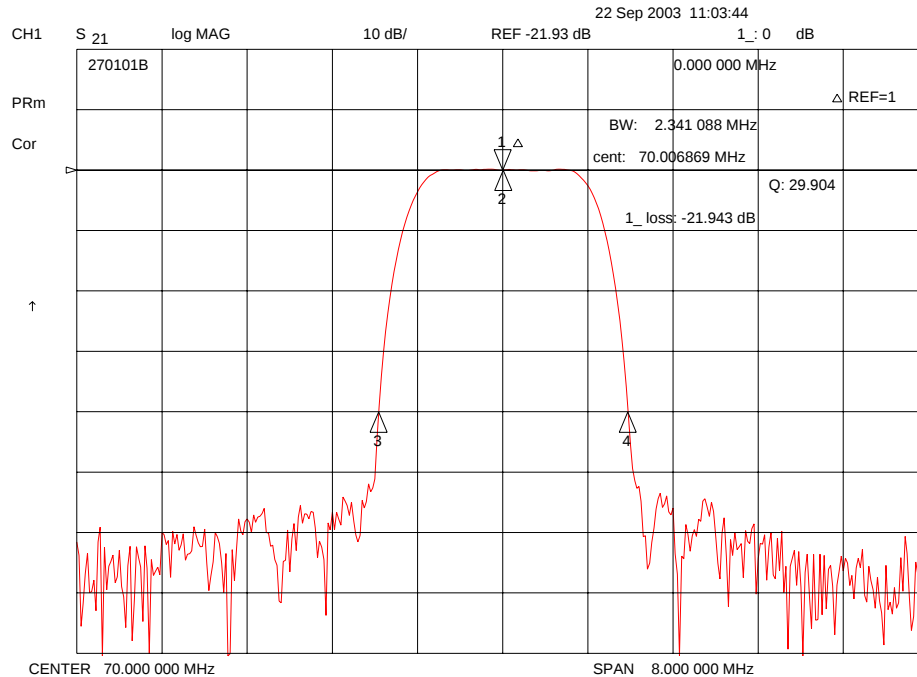

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No. 270101B	
			Rev. Date 2004-03-16	
			Rev. NW3023-CS02	4/5

SAW Bandpass Filter 270101B

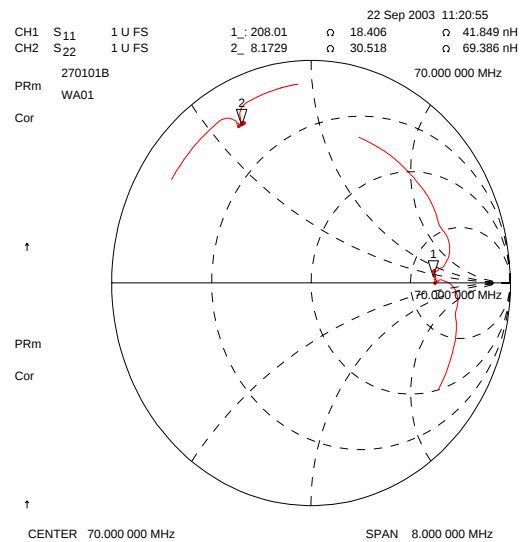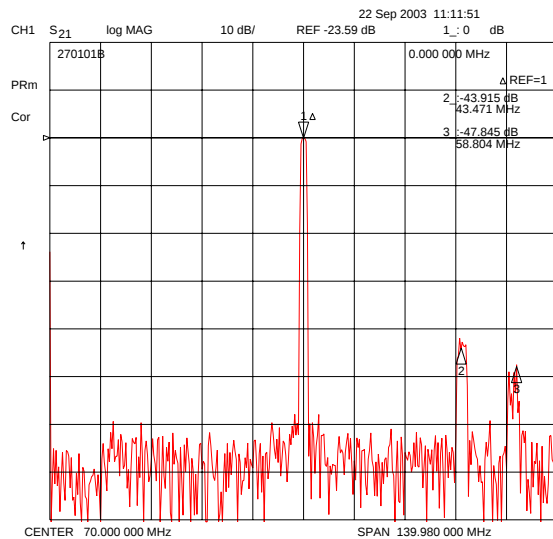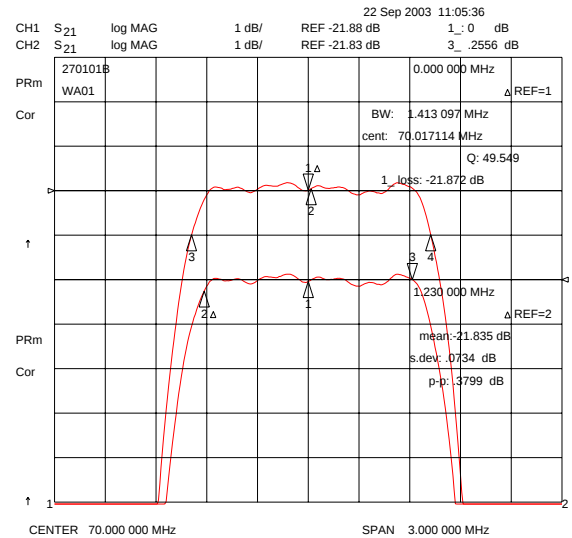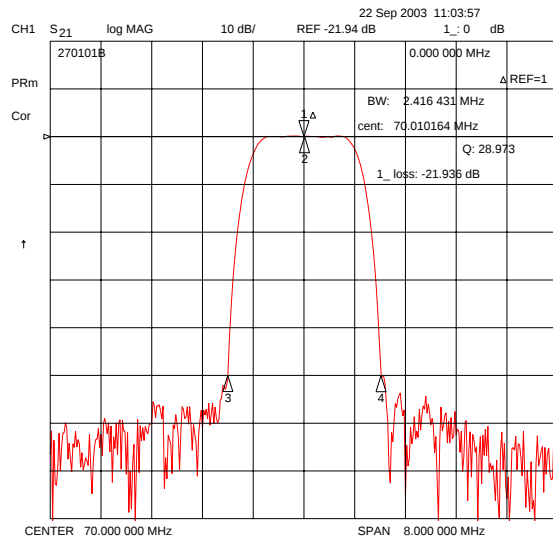

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

270101B

Rev. Date

2004-03-16

Rev.

NW3023-CS02

5/5