


DEC

1N4001 THRU 1N4007

CURRENT 1.0 Ampere
VOLTAGE 50 to 1000 Volts

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed : 250°C/10 seconds, 0.375"(9.5mm) lead length, 5lbs.(2.3kg).

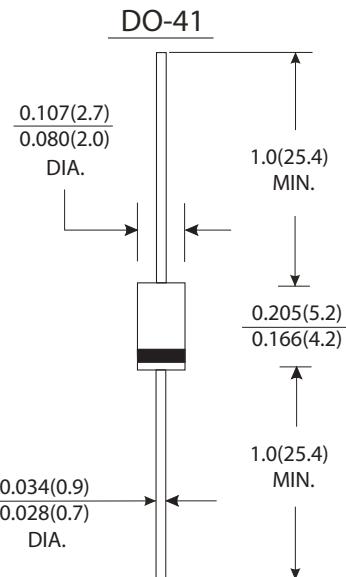

Dimensions in inches and (millimeters)

Mechanical Data

- Case : JEDEC DO-41 molded plastic body
- Terminals : Lead solderable per MIL-STD-750, method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.012 ounce, 0.33 gram

Maximum Ratings And Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	1N 4001	1N 4002	1N 4003	1N 4004	1N 4005	1N 4006	1N 4007	Units
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length TA=75°C	I _(AV)	1.0						Amp	
Peak forward surge current 8.3ms half sine wave superimposed on rated load (JEDEC method) at TA=75°C	I _{FSM}	30.0						Amps	
Maximum instantaneous forward voltage at 1.0A	V _F	1.1						Volts	
Maximum reverse current at rated DC blocking voltage	I _R	5.0						μ A	
TA=25°C TA=100°C		50.0							
Typical thermal resistance (Note 2)	R _{θ JA}	50.0						°C/W	
	R _{θ JL}	25.0							
Typical junction capacitance (Note 1)	C _J	15.0						pF	
Maximum DC blocking voltage temperature	T _A	+150						°C	
Operating and storage temperature range	T _J T _{STG}	-50 to +175						°C	

Notes:

(1) Measured at 1MHz and applied reverse voltage of 4.0V DC.

(2) Thermal resistance from junction to ambient and from junction to lead at 0.375"(9.5mm) lead length, P.C.B. mounted

DEC

RATINGS AND CHARACTERISTIC CURVES 1N4001 THRU 1N4007

FIG.1-FORWARD CURRENT DERATING CURVE

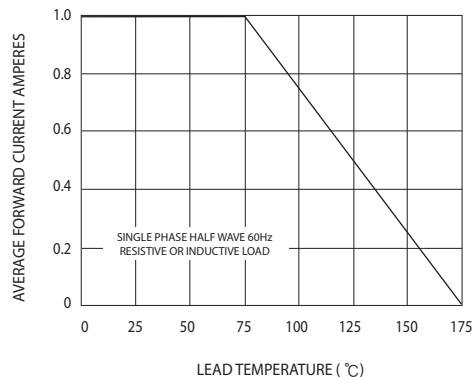


FIG.3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

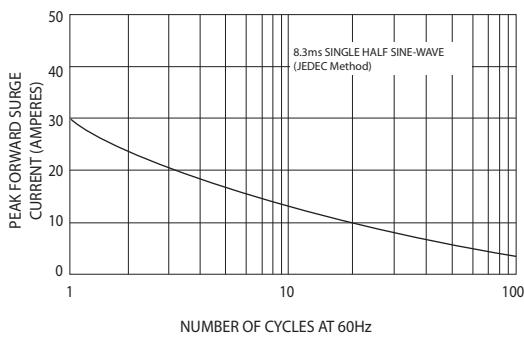


FIG.5-TYPICAL JUNCTION CAPACITANCE

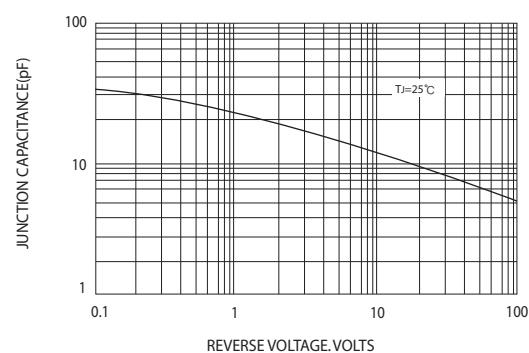


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

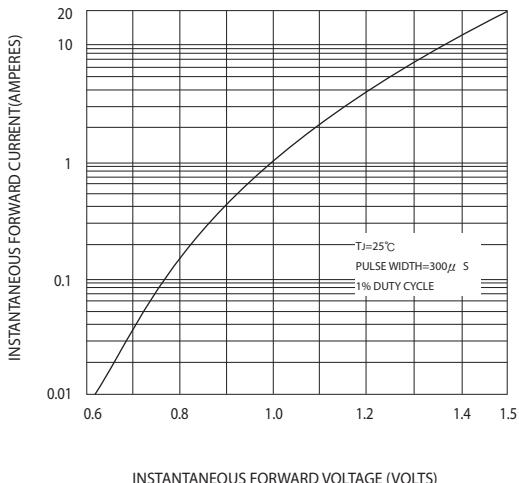


FIG.4-TYPICAL REVERSE CHARACTERISTICS

