



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Filter 466MHz F11

TST Parts No.:TA466E1

Customer Parts No.:_____

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____Elvis Chiu

Approval by:_____Francis Chen

Date:_____2004/11/18



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 466 MHz

MODEL NO.: TA466E1

REV. NO.:4

A. MAXIMUM RATING:

1. Input Power Level: 0 dB_m
2. DC voltage: 10 V
3. Operating Temperature: -10°C to +50°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant


Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:



Characteristics	Specification	Note
Center frequency F_c (MHz)	466	1
I.L. (Within $F_c \pm 4$ MHz) (dB)	4.5 max.	
Ripple(Within $F_c \pm 4$ MHz) (dB)	2.5 max.	1
Attenuation:(Reference level from 0 dB) (dB)		
$F_c - 100$ MHz to -40.8MHz (dB)	50 min.	1
$F_c + 40$ MHz to + 100MHz (dB)	42 min.	
Impedance at F_c ; Input $Z_{IN} = R_{IN} // C_{IN}$	50Ω // 0PF	2
Output $Z_{OUT} = R_{OUT} // C_{OUT}$	50Ω // 0PF	2

Note1. The standard definitions is in JIS C 6703


Note2.

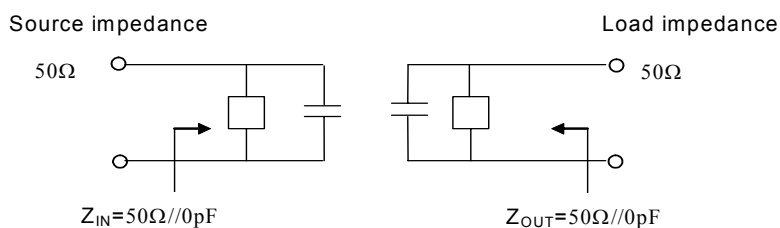

C. Frequency Characteristics :

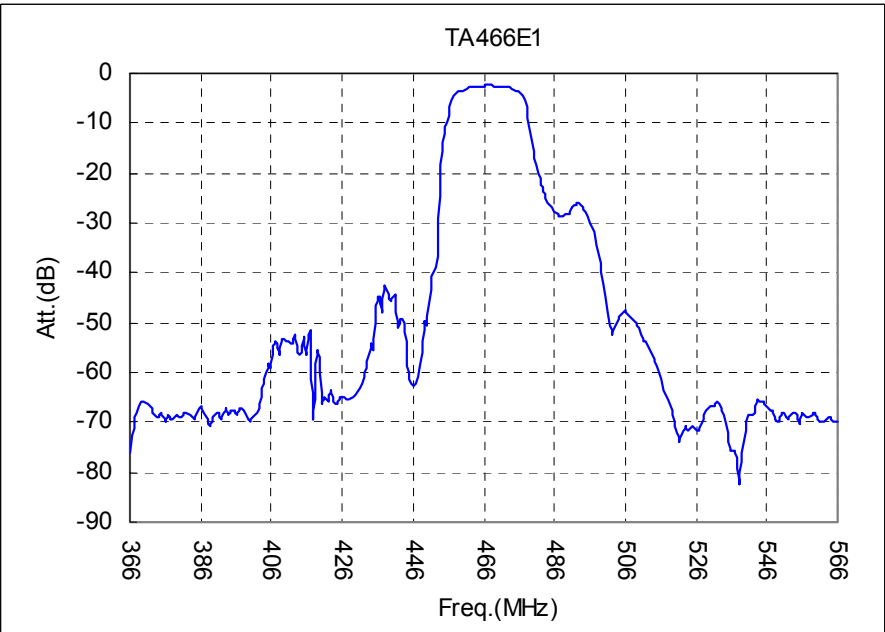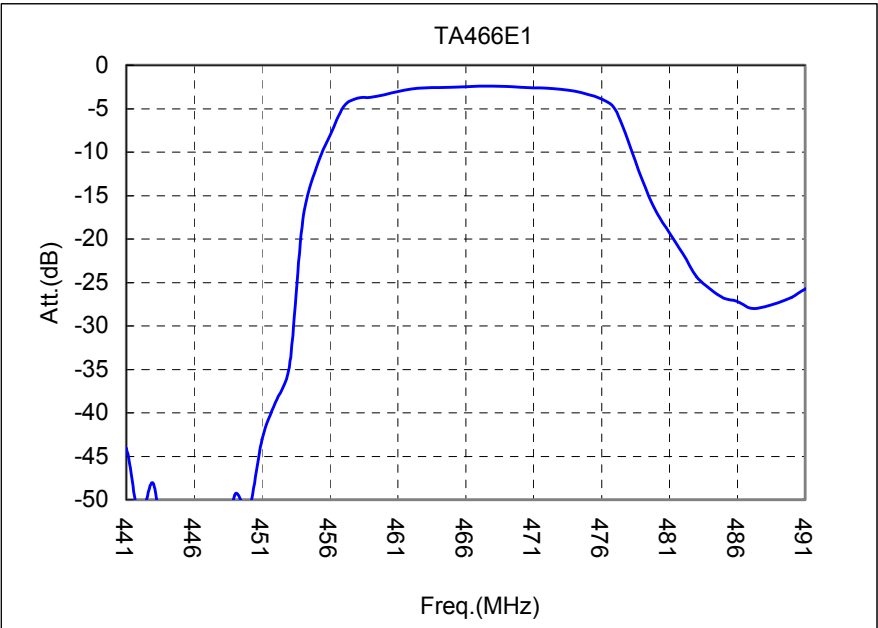

D. MEASUREMENT CIRCUIT:

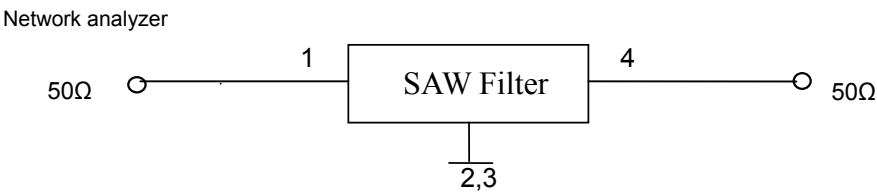

E.OUTLINE DRAWING:

