



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 2017.5 MHz SMD 2.0X1.4 mm

TST Part No.: TA1129A

Customer Part No.: _____


Customer signature required


Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau 

Approved by: _____ Francis Chen 

Date: _____ 10, 29, 2009

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

Web: www.taisaw.com

SAW Filter 2017.5MHz

MODEL NO.:TA1129A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -25°C to +85°C
4. Storage Temperature: -40°C to +95°C


B. ELECTRICAL CHARACTERISTICS:

Terminating source impedance (single-ended) : $Z_s = 50 \Omega$

Terminating load impedance (differential) : $Z_L = 200 \Omega // 15nH$

Item	Unit	Min.	Type.	Max.	Note
Center Frequency F_c	MHz	-	2017.5	-	-
Insertion Loss (2010~2025 MHz)	dB	-	2	2.7	-
Amplitude ripple (2010~2025 MHz)	dB	-	0.4	1.4	-
Group Delay ripple (2010~2025 MHz)	ns	-	3	12	-
Output amplitude balance ($ S_{31}/S_{21} $) (2010~2025 MHz)	dB	-4	-1.6	4	-
Output phase balance ($\Phi(S_{31}) - \Phi(S_{21}) + 180^\circ$) (2010~2025 MHz)	deg	-12	-5	12	-
VSWR (2010~2025 MHz)		-	2.1	2.5	-
Attenuation					
100~995 MHz	dB	32	56	-	-
995~1022 MHz	dB	35	55	-	-
1022~1925 MHz	dB	25	36	-	-
1925~1950 MHz	dB	22	35	-	-
2085~2110 MHz	dB	15	28	-	-
2430~2565 MHz	dB	35	60	-	-
2565~4010 MHz	dB	32	42	-	-
4010~4060 MHz	dB	40	55	-	-
4060~6000 MHz	dB	32	45	-	-


C.OUTLINE DRAWING:

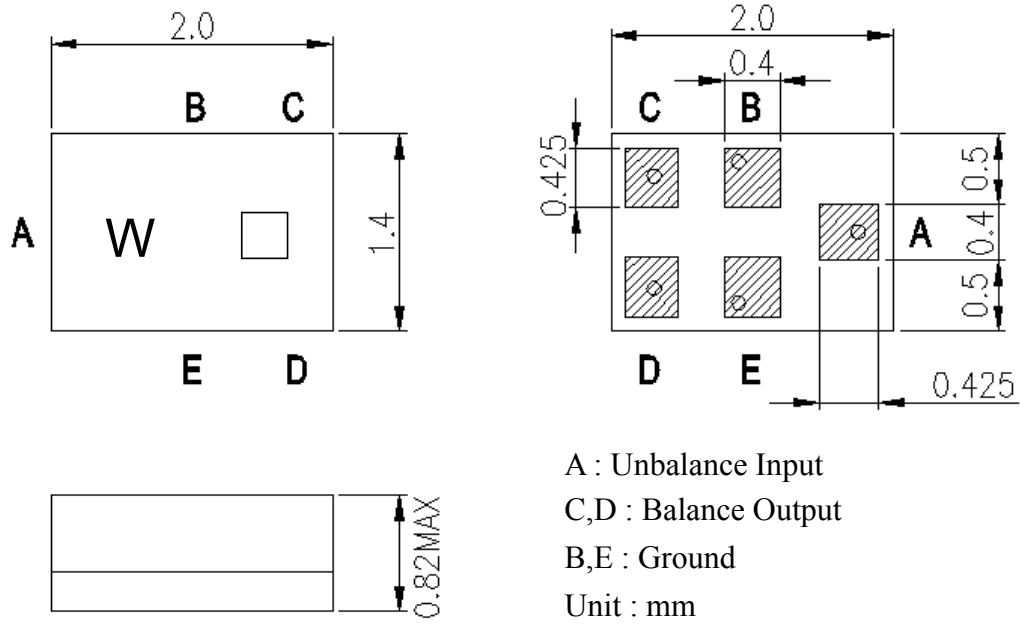




□ : Year/Month Code (Follow the table)




Year/Month	1	2	3	4	5	6	7	8	9	10	11	12
2005	A	B	C	D	E	F	G	H	J	K	L	M
2006	N	P	Q	R	S	T	U	V	W	X	Y	Z
2007	a	b	c	d	e	f	g	h	j	k	l	m
2008	n	p	q	r	s	t	u	v	w	x	y	z
2009	A	B	C	D	E	F	G	H	J	K	L	M
2010	N	P	Q	R	S	T	U	V	W	X	Y	Z

D. MEASUREMENT CIRCUIT:

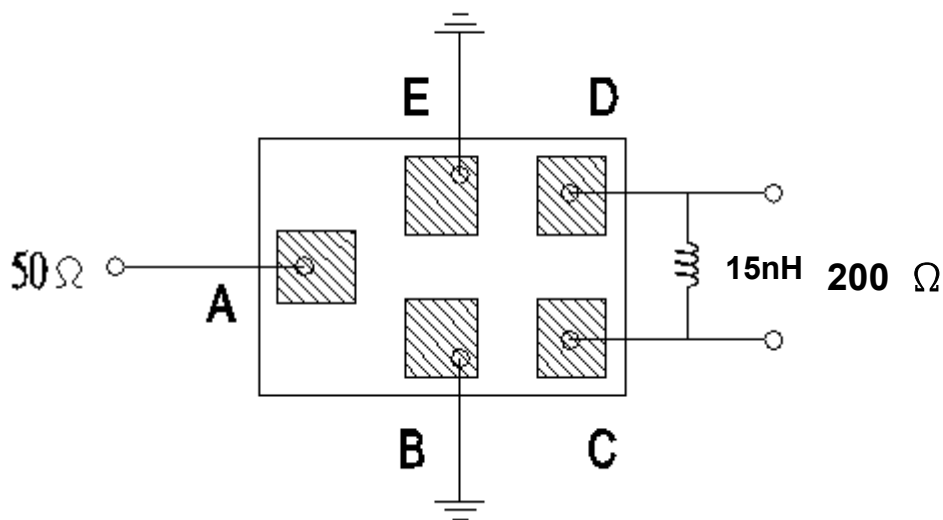

E. Frequency Characteristics :

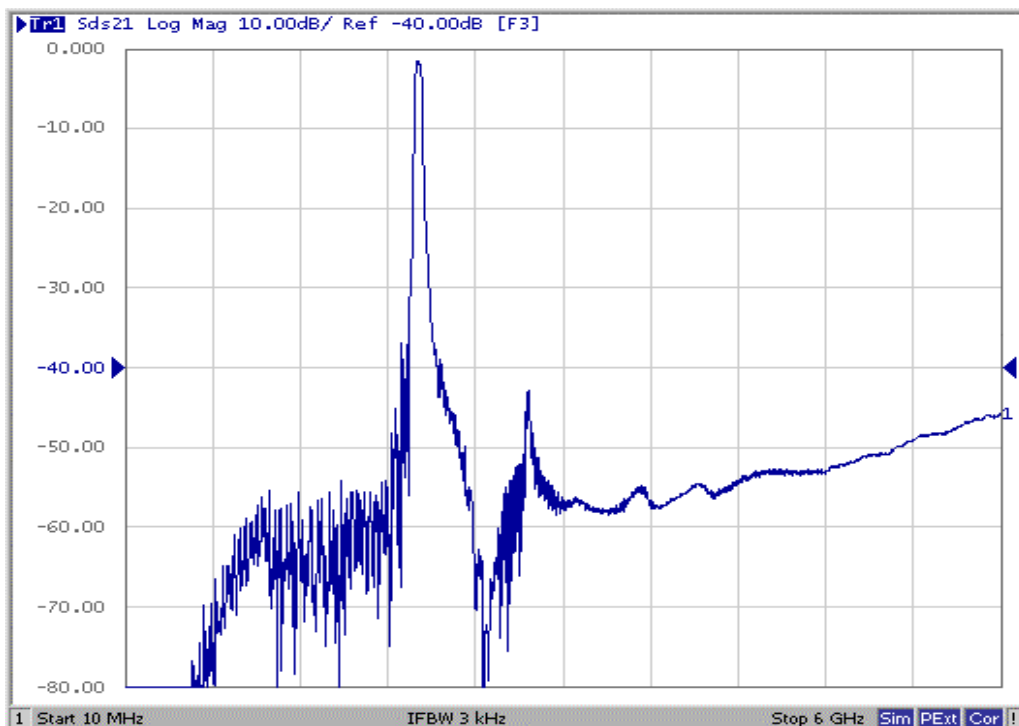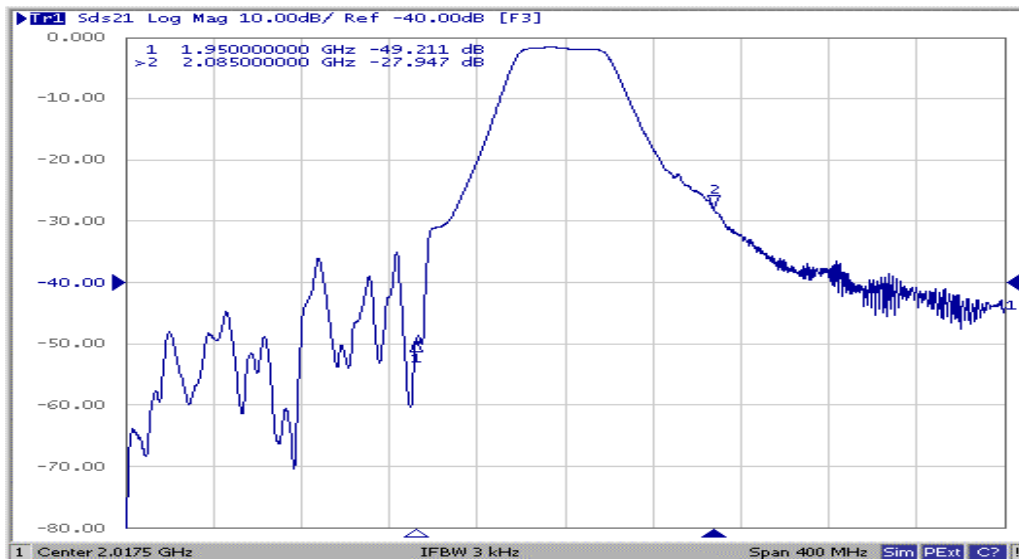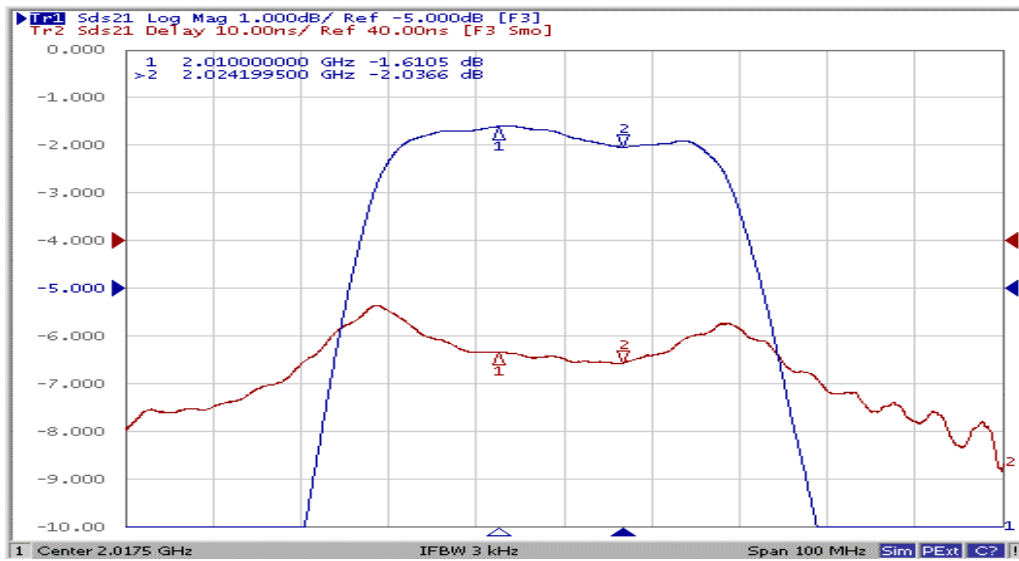


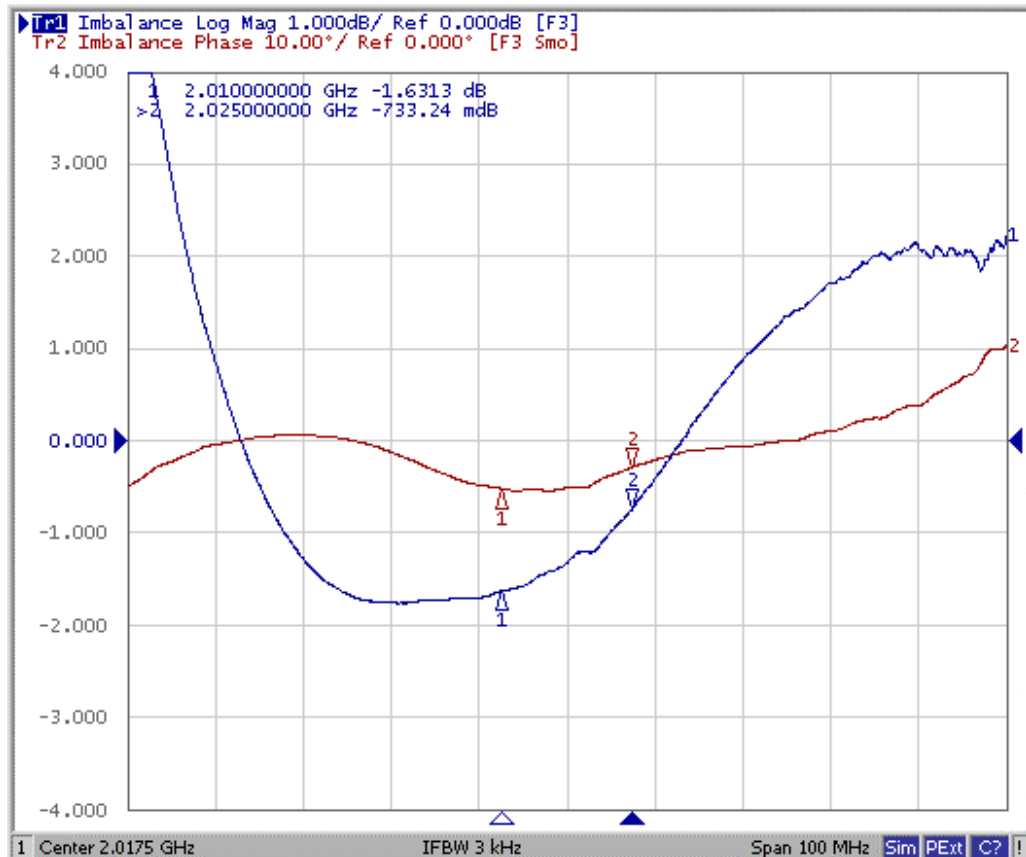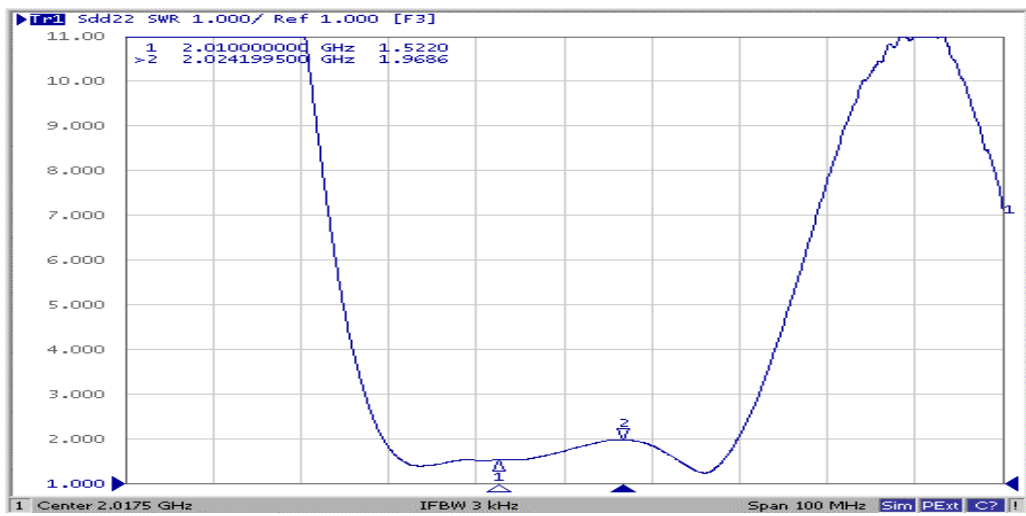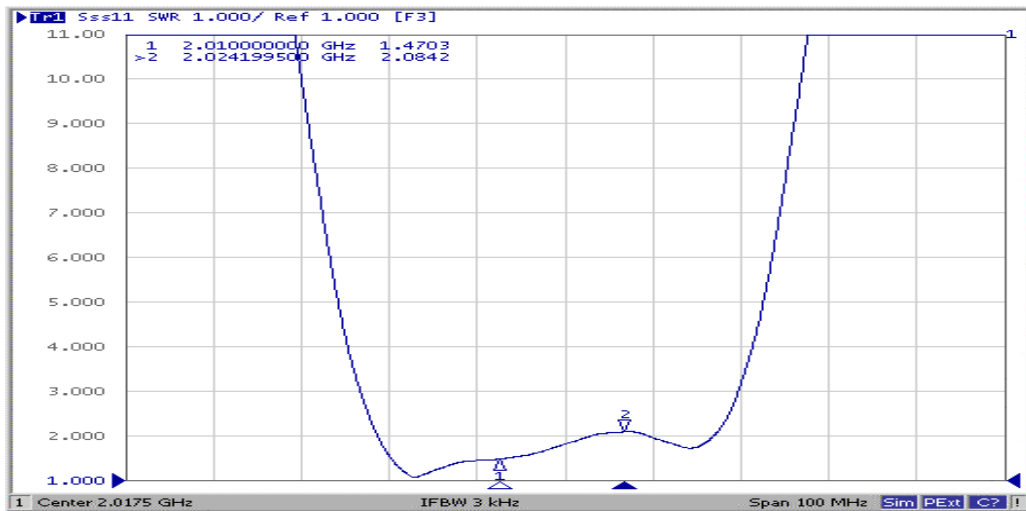


F. PACKING:

1. REEL DIMENSION

(Reel Count : 7''=2000 ; 13''=10000)

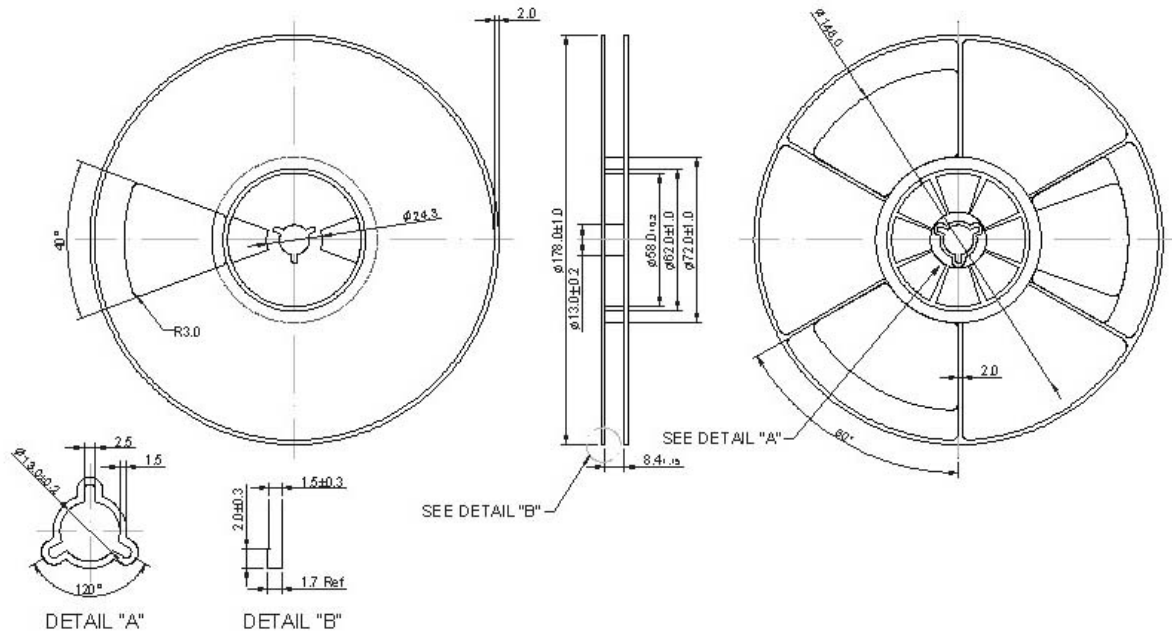

2. TAPE DIMENSION

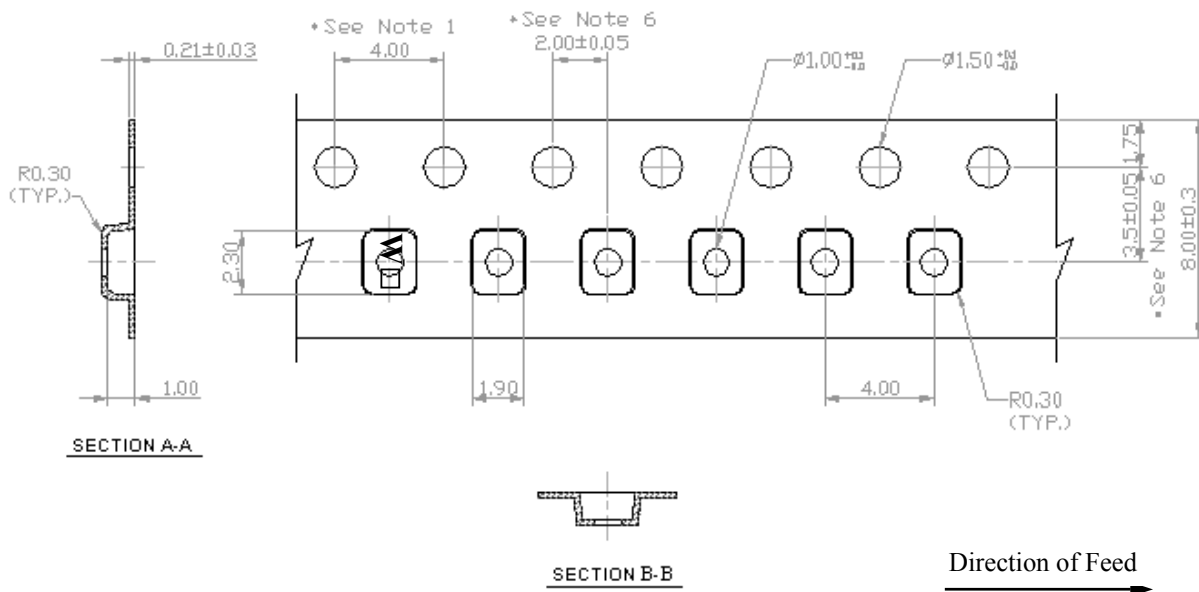

G. RECOMMENDED REFLOW PROFILE :

