

10BASE T ISOLATION TRANSFORMER

Turns Ratio ($\pm 3\%$)

1ct:1ct



Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

PARAMETER	MIN.	MAX.	UNITS
¹ Open Circuit Inductance	100		μHy
¹ Leakage Inductance		0.2	μHy
¹ Interwinding Capacitance ($C_{w/w}$)		10	pF
DC Resistance		0.3	ohms
Rise Time		2.7	ns
High Potential Test	2000		V_{RMS}
E T	2.7		$V\mu\text{S}$

Parts shipped in anti-static tubes. 55 pieces per tube


¹Tested @ 100mV & 100.0 KHz

*Tape & Reel
Available*

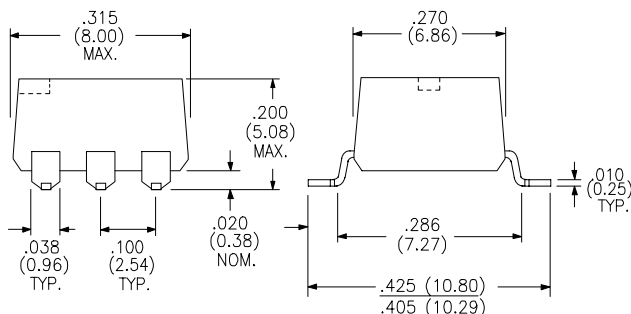

PHYSICAL DIMENSIONS
All dimensions in inches (mm):

SCHEMATIC DIAGRAM:



RHOMBUS INDUSTRIES INC.
FSCM NO. 16714

RHOMBUS P/N: T-922G

CUST P/N:

NAME:

DATE: 5/20/97

SHEET: 1 OF 1



**Rhombus
Industries Inc.**
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649

Phone: (714) 898-0960

FAX: (714) 896-0971

www.rhombus-ind.com