

1. PART NO. EXPRESSION :

STF1006121YZF

(a) (b) (c) (d)(e)(f)

(a) Series code

(b) Dimension code


(c) Inductance code : 121 = 120uH

(d) Tolerance code : Y = $\pm 40\%$

(e) X, Y, Z : Standard part

(f) F : Lead Free


2. CONFIGURATION & DIMENSIONS :

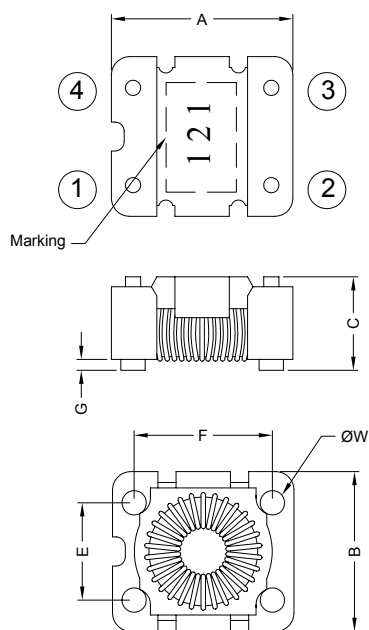

Unit:m/m

A	B	C	E	F	G	ØW
10.00 $\pm$ 0.3	8.70 $\pm$ 0.3	6.50 Max.	6.22 $\pm$ 0.3	7.62 $\pm$ 0.3	0.30 Min.	1.20 $\pm$ 0.1

3. SCHEMATIC :



"●": Polarity



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


09.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1

4. MATERIALS :



- (a) Core : Ferrite Core
(b) Wire : Enamelled Copper Wire
(c) Base : Phenolic
(d) Terminal : Tinned Copper Wire
(e) Adhesive : Epoxy
(f) Ink : Bon Margue

5. GENERAL SPECIFICATION :

- a) Temp. rise : 45°C Max. at rated current
b) Storage temp. : -40°C to +125°C
c) Operating temp. : -40°C to +80°C
d) Resistance to solder heat : 260°C. 10secs

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance L1 , L2 (μ H)	DC Resistance N1 , N2 (Ω)	Rated Current (A)	Impedance (Ω)	Frequency Range (MHz)
STF1006121YZF	120 $\pm$ 40%	0.025 Max.	1.40	200 Min.	10 ~ 200
STF1006251YZF	250 $\pm$ 40%	0.030 Max.	1.25	400 Min.	5 ~ 100
STF1006501YZF	500 $\pm$ 40%	0.060 Max.	0.90	800 Min.	2 ~ 50
STF1006102YZF	1000 $\pm$ 40%	0.180 Max.	0.50	1400 Min.	1 ~ 40
STF1006202YZF	2000 $\pm$ 40%	0.250 Max.	0.45	2000 Min.	0.5 ~ 15
STF1006302YZF	3000 $\pm$ 40%	0.300 Max.	0.40	3000 Min.	0.5 ~ 10
STF1006402YZF	4000 $\pm$ 40%	0.580 Max.	0.30	4000 Min.	0.5 ~ 5
* STF1006502YZF	5000 $\pm$ 40%	0.630 Max.	0.25	5000 Min.	0.5 ~ 3

* Hi-Pot Test (N1-N2) : 500VAC 60Hz 3mA 5S (50KHz/1V)

**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.


09.05.2008




SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 2

7. IMPEDANCE VS. FREQUENCY :

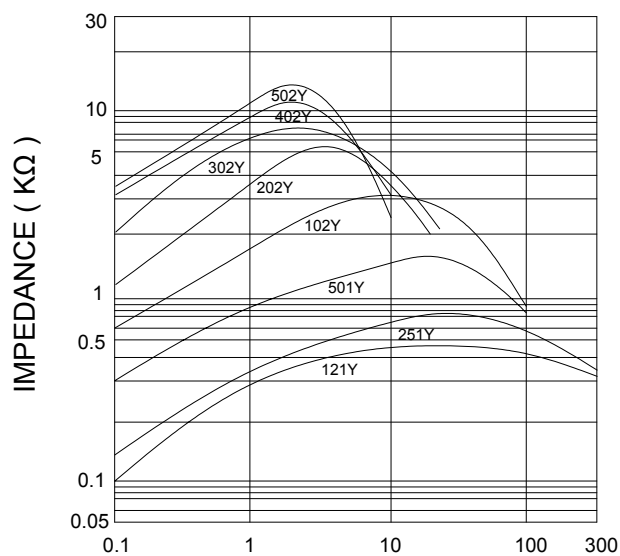

Measuring Circuit :



RF Impedance Analyzer



RoHS Compliant


NOTE : Specifications subject to change without notice. Please check our website for latest information.

09.05.2008




SUPERWORLD ELECTRONICS (S) PTE LTD

RECOMMENDED SOLDERING CONDITIONS REFLOW SOLDERINGS

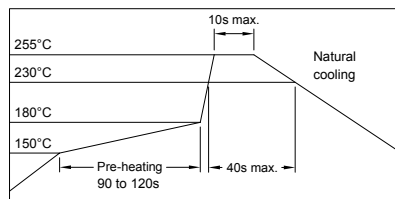


8. PACKAGING INFORMATION :

(1) CONFIGURATION

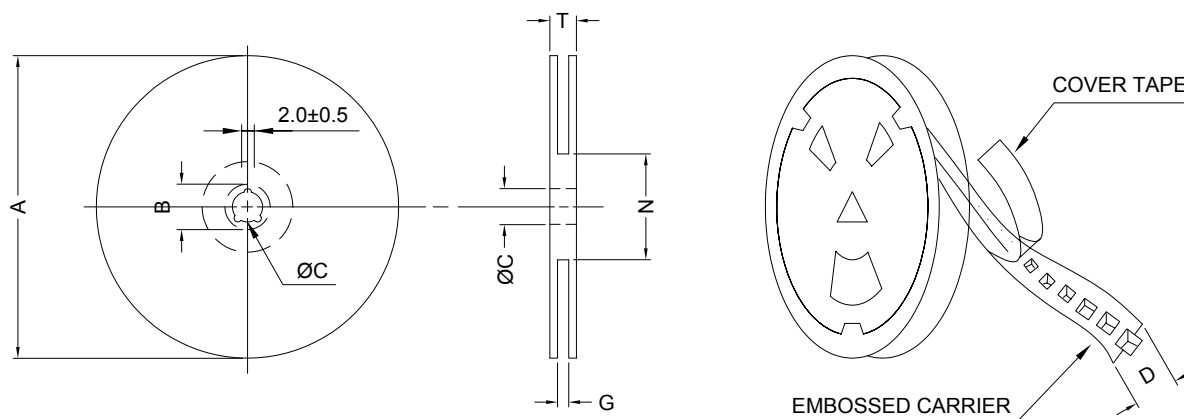

* CARRIER TAPE WIDTH : D

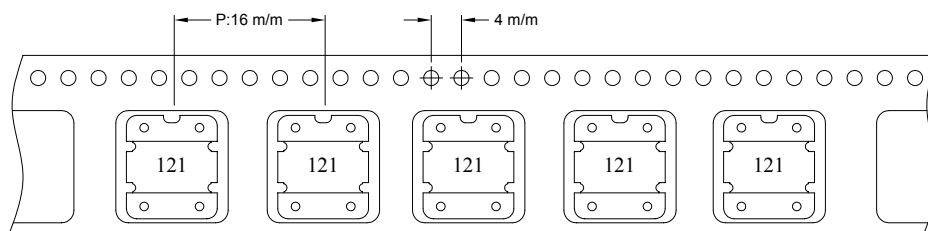

(2) DIMENSIONS

Unit:m/m

STYLE	A	B	C	D	G	N	T
13-24	330	21±0.8	13	24	18 ⁺⁰	50 ⁻⁰	22.4

(3) Q'TY & G.W. PER PACKAGE

SERIES	INNER : REEL			OUTER : CARTON		
	Q'TY (PCS)	G.W. (gw)	STYLE	Q'TY (PCS)	G.W. (Kg)	SIZE (cm)
STF1006	600	510	13-24	2400	5.6	37 x 36 x 10.4



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

09.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

9. RELIABILITY AND TEST CONDITION :

TEST ITEM	SPECIFICATION	TEST CONDITION
SOLDERABILITY	MORE THAN 90% OF THE TERMINAL ELECTRODE SHALL BE COVERED WITH FRESH SOLDER.	PREHEAT : 125±25°C FOR 60 SECONDS SOLDER : 99%Sn/0.3%Ag/0.7%Cu OR EQUIVALENT SOLDER TEMP. : 245±5°C FLUX : ROSIN DIP TIME : 4±1 SECONDS
THERMAL SHOCK TEST (TEMP. CYCLE)	INDUCTANCE SHALL NOT CHANGE MORE THAN ±20%	ROOM TEMP. → -25±2°C 15 MINUTES 30 MINUTES ROOM TEMP. → 85±2°C 15 MINUTES 30 MINUTES TOTAL : 50 CYCLES
HUMIDITY RESISTANCE TEST		TEMPERATURE : 40±2°C HUMIDITY : 90 ~ 95% APPLIED CURRENT : PER SPEC. TIME : 500 HOURS
HIGH TEMP. RESISTANCE TEST		TEMPERATURE : 85±2°C APPLIED CURRENT : PER SPEC. TIME : 500 HOURS

10. UL CARD :

OBMW2		November 30, 2000	
Magnet Wire - Component			
PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD			E201757
607 BAOLONG INDUSTRIAL ESTATE LONGGANG, SHENZHEN GUANGDONG CHINA			
	Coating Type		ANSI
Mtl Dsg	BC	TC	Type
UEW/U	Polyurethane	—	—
PEW/U	Polyester	—	MW5-C
PEWH/U	Modified Polyester	—	MW30-C
PEW-NY/U	Polyester	Polyamide	MW24-C
HAI/U	Polyester(Amide)(Imide)	Polyamideimide	MW35,73
UEW-NY/U	Polyurethane	Polyamide	MW80-C
			MW28-C
			TI
			130
			155°C
			180
			155
			200
			155
			130

Marking: Company name and material designation or marked designation on package or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions

1/3/2001 Underwriters Laboratories Inc. Card 1 of 2



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

09.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 5

COMMON MODE CHOKE

STF1006 SERIES

10. UL CARD :

QMFZ2		May 10, 1995									
Component-Plastics											
SUMITOMO BAKELITE CO LTD		E41429 (M)									
		(B-cont. from A card)									
AM - 3130A	ALL	0.99	94V-0	130	130	130	0	3	—	—	—
		3.0	94V-0	130	130	130	0	2	—	5	0
AM-1120,	BK	0.99	94V-0	130	130	130	—	—	—	—	—
AM112											
AM-1130,	BK	0.40	94V-0	130	130	130	—	—	—	—	—
AM-113	BK,GN	0.75	94V-0	130	130	130	0	2	—	—	—
	ALL	1.1	94V-0	130	130	130	0	1	—	—	—
		1.5	94V-0	130	130	130	0	1	—	—	—
		3.0	94V-0	130	130	130	0	1	0	5	0
AM-1140,	ALL	1.1	94V-0	130	130	130	1	0	—	—	—
AM-1130,	BK	1.5	94V-0	130	130	130	1	0	—	—	—
AM-3131,		3.0	94V-0	130	130	130	0	0	0	5	0
AM-3000,	BK	0.74	94V-0	130	130	130	—	—	—	—	—
AM-300											
Reports: November 14,1983, September 16, 1971 : December 31,1973;September 16,1971.											
Replaces E41429b dated June 7, 1994.											
683540014 N7047 Underwriters Laboratories Inc.®		(Cont. on C card) D11/0029309									

OMFZ2		January 20, 1987									
Component-Plastics											
SHAW HUOW ENTERPRISE CO LTD		E105888 (S)									
P O BOX 87-739 , TAIPEI TAIWAN											
Mtl Dsg	Col	Min Thk mm	UL94 Flame Class	Elec	RTI Mech with Imp	w/o Imp	H W I	H A I	H V T R	D 4 5	C T I
Epoxy coating compound.											
9001A/9001B	ALL	1.0	94V-0	90	90	90	—	—	—	—	—
Marking: Company name and grade designation on container or wrapper.											
See General Information Preceding These Recognitions.											
UL94 small scale test data does not pertain to building materials, furnishings and related contents.											
UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of and product devices and appliances, where the acceptability of the combination is determined by ULL.											
Report: December 23, 1986.											
833541001 H7047 Underwriters Laboratories Inc.®		D11/0137843									



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.



SUPERWORLD ELECTRONICS (S) PTE LTD

09.05.2008

PG. 6