

# SS1A - SS1M

PRV : 50 - 1000 Volts

Io : 1.0 Ampere


## FEATURES :

- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Super fast recovery time
- \* Pb / RoHS Free

## MECHANICAL DATA :

- \* Case : SMA Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Lead Formed for Surface Mount
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.067 gram

## SURFACE MOUNT SUPER FAST RECTIFIERS

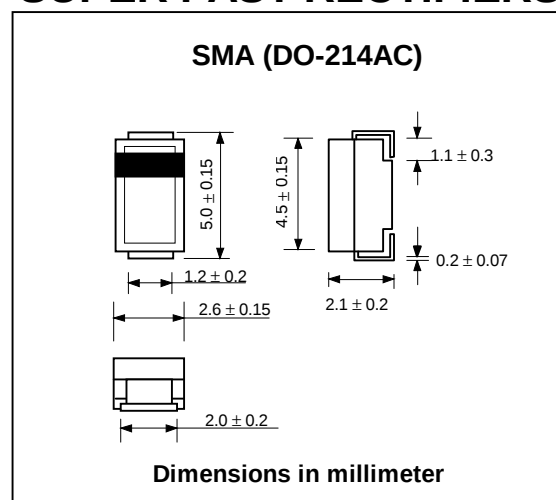

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| RATING                                                                                                           | SYMBOL | SS1A          | SS1B | SS1C | SS1D | SS1E | SS1G | SS1J | SS1K | SS1M | UNIT |
|------------------------------------------------------------------------------------------------------------------|--------|---------------|------|------|------|------|------|------|------|------|------|
| Maximum Recurrent Peak Reverse Voltage                                                                           | VRRM   | 50            | 100  | 150  | 200  | 300  | 400  | 600  | 800  | 1000 | V    |
| Maximum RMS Voltage                                                                                              | VRMS   | 35            | 70   | 105  | 140  | 210  | 280  | 420  | 560  | 700  | V    |
| Maximum DC Blocking Voltage                                                                                      | VDC    | 50            | 100  | 150  | 200  | 300  | 400  | 600  | 800  | 1000 | V    |
| Maximum Average Forward Current Ta = 55 °C                                                                       | IF(AV) | 1.0           |      |      |      |      |      |      |      |      | A    |
| Maximum Peak Forward Surge Current<br>8.3 ms. Single half sine wave Superimposed<br>on rated load (JEDEC Method) | IFSM   | 30            |      |      |      |      |      |      |      |      | A    |
| Maximum Peak Forward Voltage at IF = 1.0 A                                                                       | VF     | 0.95          |      |      |      | 1.7  |      |      | 4.0  |      | V    |
| Maximum DC Reverse Current<br>at Rated DC Blocking Voltage                                                       | IR     | 5.0           |      |      |      |      |      |      | 10   |      | μA   |
| Maximum Reverse Recovery Time ( Note 1 )                                                                         | Trr    | 35            |      |      |      |      |      |      |      |      | ns   |
| Typical Junction Capacitance ( Note 2 )                                                                          | CJ     | 50            |      |      |      |      |      |      |      |      | pf   |
| Junction Temperature Range                                                                                       | TJ     | - 65 to + 150 |      |      |      |      |      |      |      |      | °C   |
| Storage Temperature Range                                                                                        | TSTG   | - 65 to + 150 |      |      |      |      |      |      |      |      | °C   |

## Notes :

( 1 ) Reverse Recovery Test Conditions : IF = 0.5 A, IR = 1.0 A, Irr = 0.25 A.

( 2 ) Measured at 1.0 MHz and applied reverse voltage of 4.0 Vdc

## RATING AND CHARACTERISTIC CURVES ( SS1A - SS1M )

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

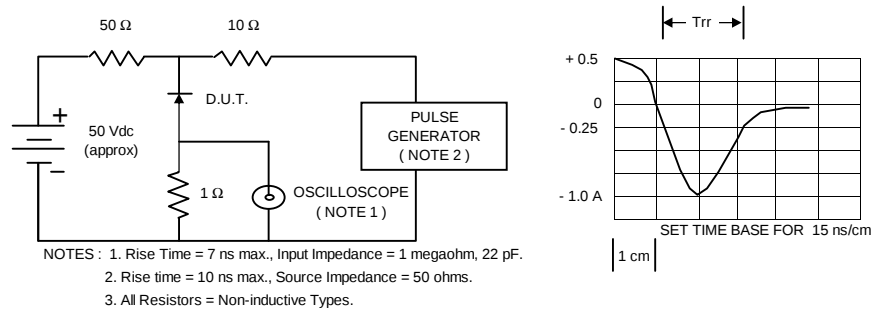


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

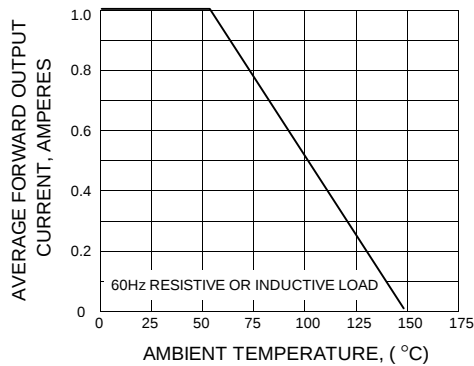


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

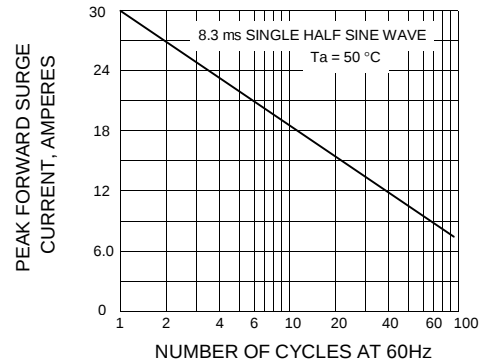


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

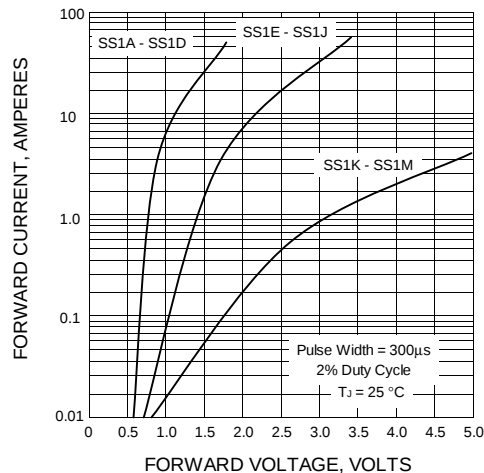


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

