


SR320M thru SR360M

SURFACE MOUNT SCHOTTKY RECTIFIER



DO-213AB / MELF

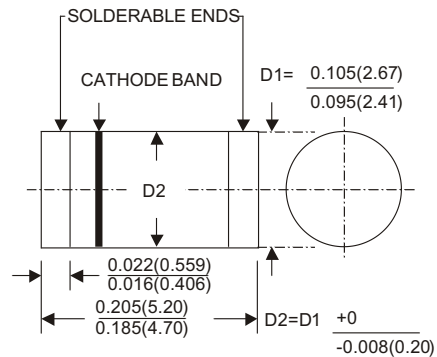

Dimension in inches (millimeters)

FEATURES

- Low power loss, high efficiency
- High current and surge capability
- Low forward voltage drop
- Guarding for over voltage protection
- High temperature soldering guaranteed :
250°C/10 seconds/ • 375" , (9.5mm) lead lengths

MECHANICAL DATA

Case : Molded plastic use UL94V-0 recognized
flame retardant epoxy

Terminals : Plated terminals

Polarity : Blue Color band on body denotes cathode

Mounting position : Any

Weight : 0.1296grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temp. unless otherwise specified

Single phase, half sine wave, 60Hz, resistive or inductive load

For capacitive load, derate current by 20%

	SYMBOL	SR320M	SR330M	SR340M	SR350M	SR360M	UNITS
Maximum Current Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	Volts
Maximum Average Forward Rectified Current	I _{I(AV)}	3.0					Amps
Peak Forward Surge Current Single Sine-Wave on Rated Load (JEDEC Method)	I _{FSM}	100					Amps
Maximum Instantaneous Forward Voltage Drop at 3.0A DC	V _F	0.5			0.75		Volts
Maximum DC Reverse Current T _A =25°C at Rated DC Blocking Voltage T _A =100°C	I _R	0.5 20					mA
Typical Thermal Resistance	R _{θJA} R _{θJL}	55 17					°C / W
Typical Junction Capacitance	C _J	500			250		pF
Operating Junction and Storage Temperature Range	T _J T _{STG}	-55 to +125 -55 to +150					°C

SR320M thru SR360M

SURFACE MOUNT SCHOTTKY RECTIFIER

RATING AND CHARACTERISTICS CURVES SR320M THRU SR360M

FIG. 1 - DERATING CURVE FOR OUTPUT RECTIFIER CURRENT

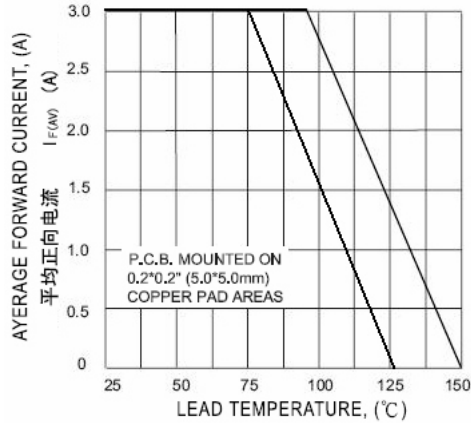


FIG. 2 - MAXIMUM NON - REPETITIVE PEAK FORWARD SURGE CURRENT

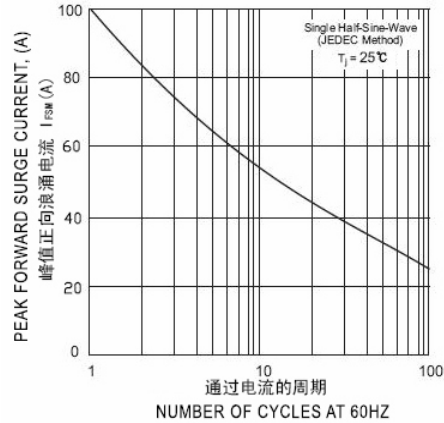


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

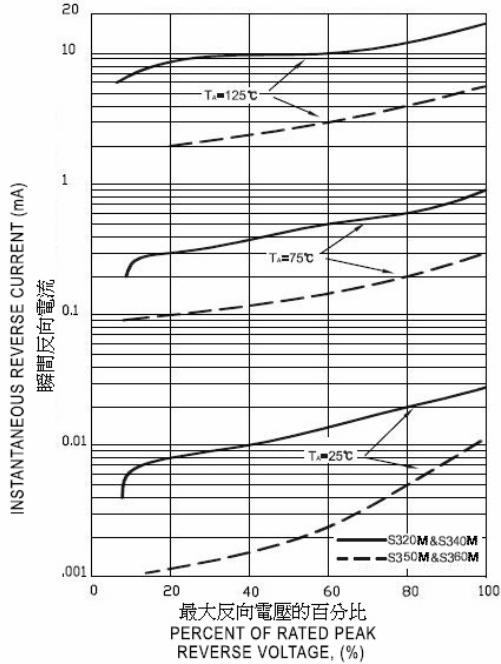


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

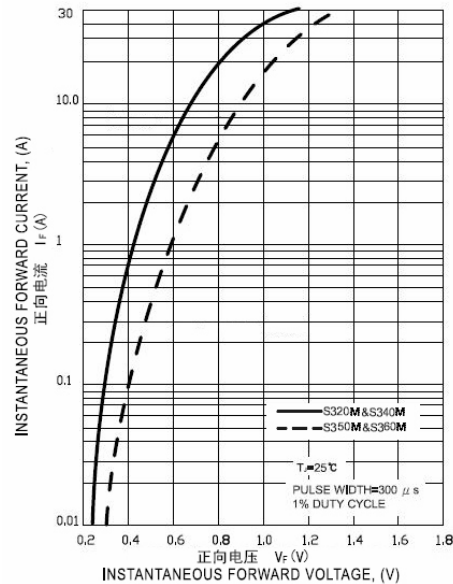


FIG. 5 - 表面電容(典型值)

FIG. 5 - TYPICAL JUNCTION CAPACITANCE

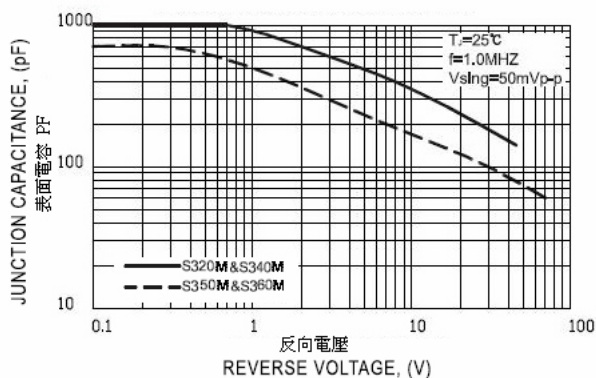


FIG. 6 - 瞬態熱阻(典型值)

FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

