


SPECIFICATION FOR APPROVAL

REF : 20080801-A


PAGE: 1

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0906□□□□L□-□□□
		ABC'S ITEM NO.	

I . CONFIGURATION & DIMENSIONS :

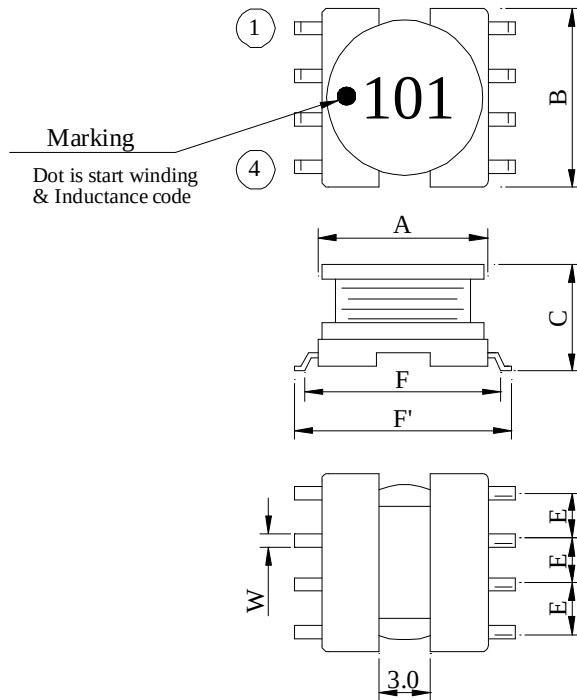

A :	9.5±0.5	m / m
B :	10.5 max.	m / m
C :	6.0±0.3	m / m
E :	2.5±0.3	m / m
F :	11.0±0.5	m / m
F' :	12.7±0.8	m / m
W :	0.6 typ.	m / m




(PCB Pattern)

II . SCHEMATIC DIAGRAM :



III . MATERIALS :


- a . Core : Ferrite DR core
- b . Wire : Enamelled copper wire (class F & H)
- c . Base : LCP E4008
- d . Terminal : Cu/Sn
- e . Adhesive : Epoxy resin
- f . Remark : Products comply with RoHS' requirements

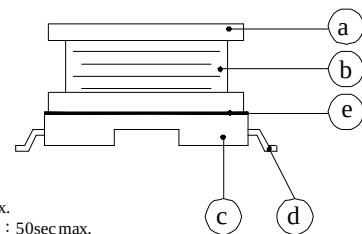

Peak Temp : 260°C max.
Max time above 230°C : 50sec max.
Max time above 200°C : 70sec max.

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 40°C max.
- b . Rated current : Base on temp. rise
& $\Delta L / L0A = 10\%$ max.
- c . Storage temp. : -40°C ---- +125°C
- d . Operating temp. : -40°C ---- +105°C
- e . Resistance to solder heat : 260°C .10 secs.

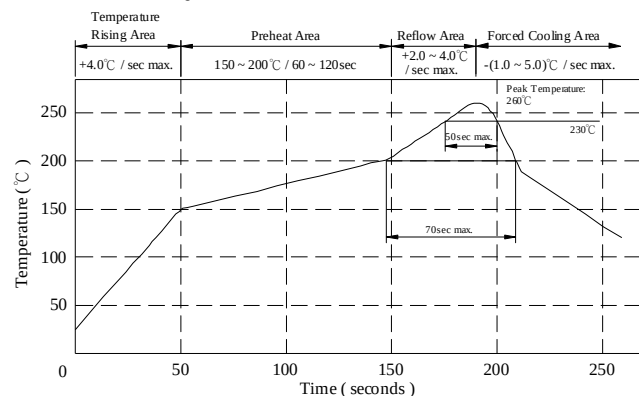

AR-001A

ABC 千如電子集團
ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL

REF : 20080801-A

PAGE: 2

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0906□□□□L□-□□□
		ABC'S ITEM NO.	

V . ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		SRF (MHz) nom.	RDC (Ω) max.	IDC (A) max.
			L	Q			
SR09062R2ML□-□□□	2.2 $\pm$ 20%	30	1K	7.960M	105.0	0.032	4.00
SR09062R7ML□-□□□	2.7 $\pm$ 20%	30	1K	7.960M	84.0	0.038	3.50
SR09063R9ML□-□□□	3.9 $\pm$ 20%	28	1K	7.960M	77.0	0.043	3.30
SR09064R7ML□-□□□	4.7 $\pm$ 20%	28	1K	7.960M	55.0	0.050	3.00
SR09065R6ML□-□□□	5.6 $\pm$ 20%	28	1K	7.960M	42.0	0.055	2.80
SR09066R8ML□-□□□	6.8 $\pm$ 20%	27	1K	7.960M	36.0	0.060	2.60
SR09068R2ML□-□□□	8.2 $\pm$ 20%	27	1K	7.960M	29.0	0.065	2.40
SR0906100ML□-□□□	10.0 $\pm$ 20%	35	1K	2.520M	25.0	0.090	2.10
SR0906120ML□-□□□	12.0 $\pm$ 20%	35	1K	2.520M	23.0	0.100	2.00
SR0906150ML□-□□□	15.0 $\pm$ 20%	35	1K	2.520M	22.0	0.110	1.90
SR0906180ML□-□□□	18.0 $\pm$ 20%	35	1K	2.520M	19.0	0.120	1.80
SR0906220ML□-□□□	22.0 $\pm$ 20%	35	1K	2.520M	16.0	0.130	1.60
SR0906270KL□-□□□	27.0 $\pm$ 10%	35	1K	2.520M	15.0	0.150	1.40
SR0906330KL□-□□□	33.0 $\pm$ 10%	35	1K	2.520M	13.5	0.180	1.25
SR0906390KL□-□□□	39.0 $\pm$ 10%	25	1K	2.520M	13.0	0.190	1.15
SR0906470KL□-□□□	47.0 $\pm$ 10%	25	1K	2.520M	12.2	0.230	1.10
SR0906560KL□-□□□	56.0 $\pm$ 10%	25	1K	2.520M	12.0	0.260	1.05
SR0906680KL□-□□□	68.0 $\pm$ 10%	20	1K	2.520M	10.0	0.310	1.00
SR0906820KL□-□□□	82.0 $\pm$ 10%	20	1K	2.520M	9.2	0.330	0.95
SR0906101KL□-□□□	100.0 $\pm$ 10%	15	1K	0.796M	9.0	0.390	0.90
SR0906121KL□-□□□	120.0 $\pm$ 10%	15	1K	0.796M	8.0	0.430	0.85
SR0906151KL□-□□□	150.0 $\pm$ 10%	15	1K	0.796M	7.5	0.560	0.75
SR0906181KL□-□□□	180.0 $\pm$ 10%	15	1K	0.796M	7.0	0.640	0.70
SR0906221KL□-□□□	220.0 $\pm$ 10%	20	1K	0.796M	6.0	0.850	0.60
SR0906271KL□-□□□	270.0 $\pm$ 10%	20	1K	0.796M	5.5	1.000	0.55
SR0906331KL□-□□□	330.0 $\pm$ 10%	15	1K	0.796M	5.3	1.270	0.50
SR0906391KL□-□□□	390.0 $\pm$ 10%	15	1K	0.796M	5.0	1.400	0.45
SR0906471KL□-□□□	470.0 $\pm$ 10%	15	1K	0.796M	4.8	1.630	0.40
SR0906561KL□-□□□	560.0 $\pm$ 10%	15	1K	0.796M	4.5	2.100	0.32
SR0906681KL□-□□□	680.0 $\pm$ 10%	15	1K	0.796M	4.0	2.400	0.28
SR0906821KL□-□□□	820.0 $\pm$ 10%	15	1K	0.796M	3.5	2.750	0.24
SR0906102KL□-□□□	1000.0 $\pm$ 10%	60	1K	0.252M	2.5	3.500	0.22
SR0906122KL□-□□□	1200.0 $\pm$ 10%	60	1K	0.252M	2.0	4.000	0.20
SR0906152KL□-□□□	1500.0 $\pm$ 10%	70	1K	0.252M	2.0	5.000	0.18
SR0906182KL□-□□□	1800.0 $\pm$ 10%	60	1K	0.252M	1.9	5.800	0.17
SR0906222KL□-□□□	2200.0 $\pm$ 10%	94	1K	0.252M	1.6	8.000	0.14
SR0906272KL□-□□□	2700.0 $\pm$ 10%	90	1K	0.252M	1.3	9.000	0.13
SR0906332KL□-□□□	3300.0 $\pm$ 10%	78	1K	0.252M	1.3	10.000	0.12
SR0906392KL□-□□□	3900.0 $\pm$ 10%	96	1K	0.252M	1.2	13.500	0.10
SR0906472KL□-□□□	4700.0 $\pm$ 10%	86	1K	0.252M	1.0	15.000	0.09
SR0906562KL□-□□□	5600.0 $\pm$ 10%	100	1K	0.252M	1.0	20.000	0.07
SR0906682KL□-□□□	6800.0 $\pm$ 10%	90	1K	0.252M	0.9	23.000	0.06
SR0906822KL□-□□□	8200.0 $\pm$ 10%	100	1K	0.252M	0.8	28.000	0.05
SR0906103KL□-□□□	10000.0 $\pm$ 10%	100	1K	79.6K	0.7	33.000	0.04

1). □ : Packaging information... A : Bulk B : Taping Reel

2). "-□□□":Reference code

3). IDC base on temp. rise 40°C max. & Δ L/L0A=10% max.

AR-001A

 千如電子集團
ABC ELECTRONICS GROUP.


SPECIFICATION FOR APPROVAL

REF : 20080801-A

PAGE: 3

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0906□□□□L□-□□□
		ABC'S ITEM NO.	

VI . INDUCTANCE VS. DC CURRENT CURVE :

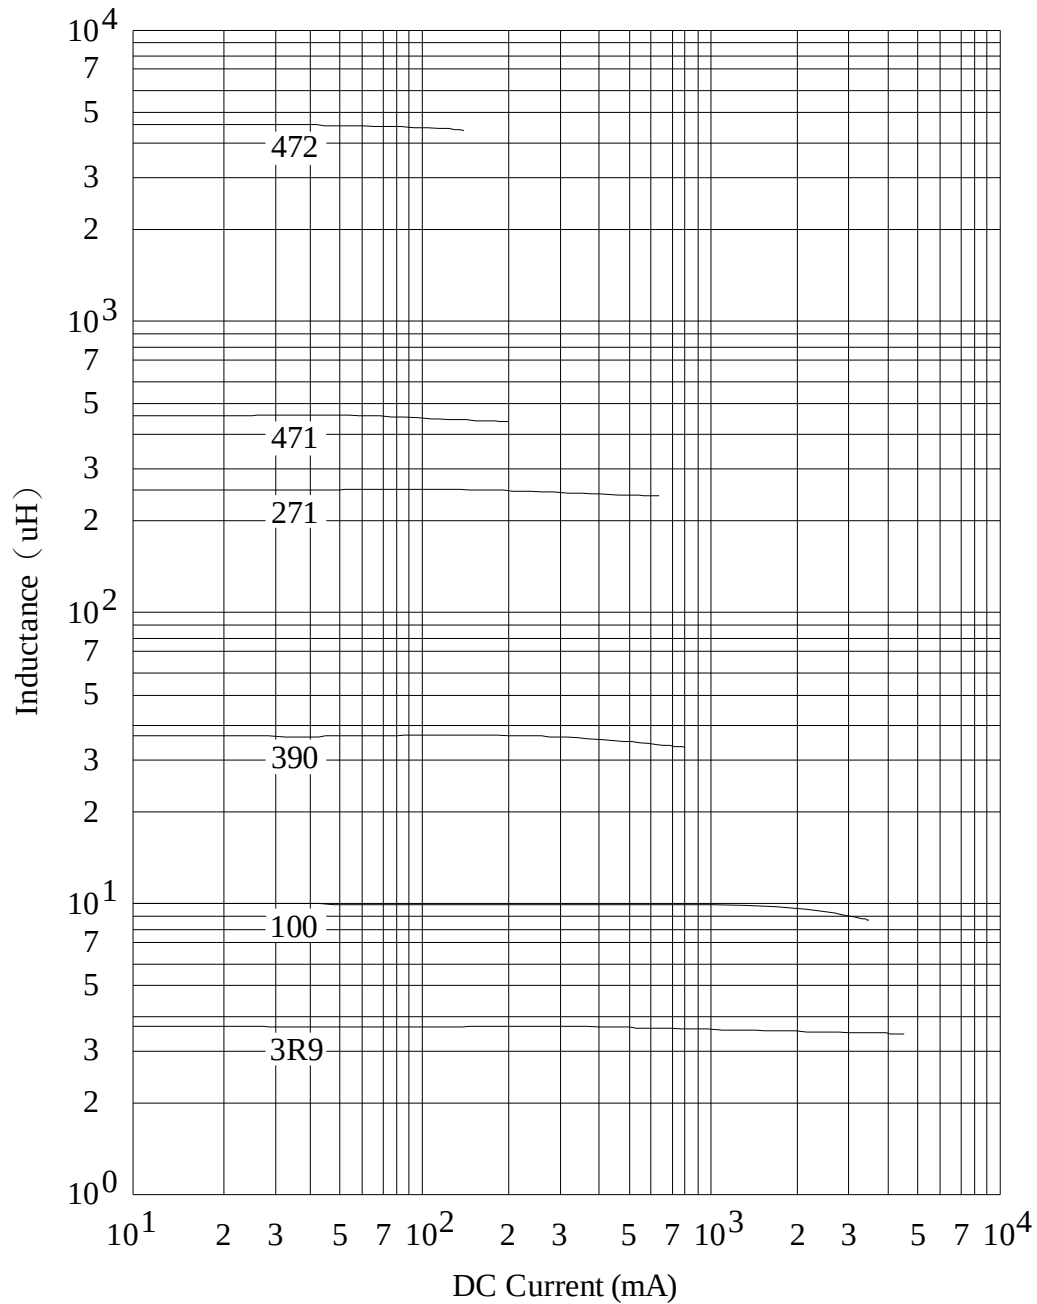

AR-001A

SPECIFICATION FOR APPROVAL


REF : 20080801-A

PAGE: 4


PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0906□□□□L□-□□□
		ABC'S ITEM NO.	

VII . PACKAGING INFORMATION :

(1) Configuration

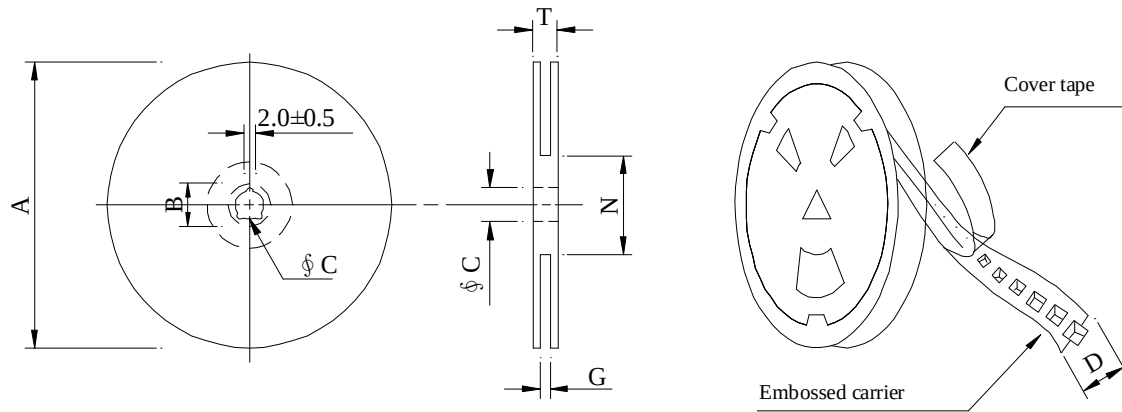

※Carrier tape width : D

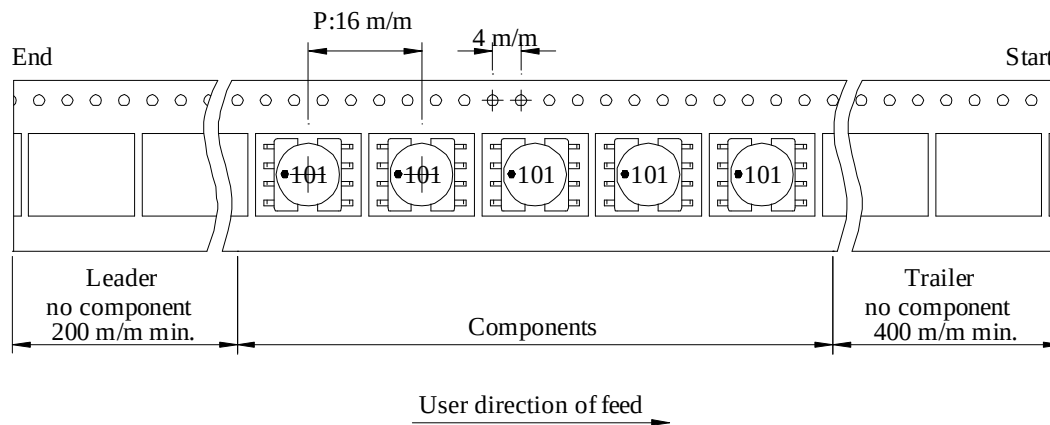

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13±0.5	24	26 ⁺⁰	50 ⁻⁰	30.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SR0906	600	1,400	13 - 24	2,400	7.6	40 x 40 x 24

AR-001A


 千如電子集團
 ABC ELECTRONICS GROUP.


SPECIFICATION FOR APPROVAL

REF : 20080801-A

PAGE: 5

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0906□□□□L□-□□□
		ABC'S ITEM NO.	

VIII . DWGING NUMBER EXPRESSION :

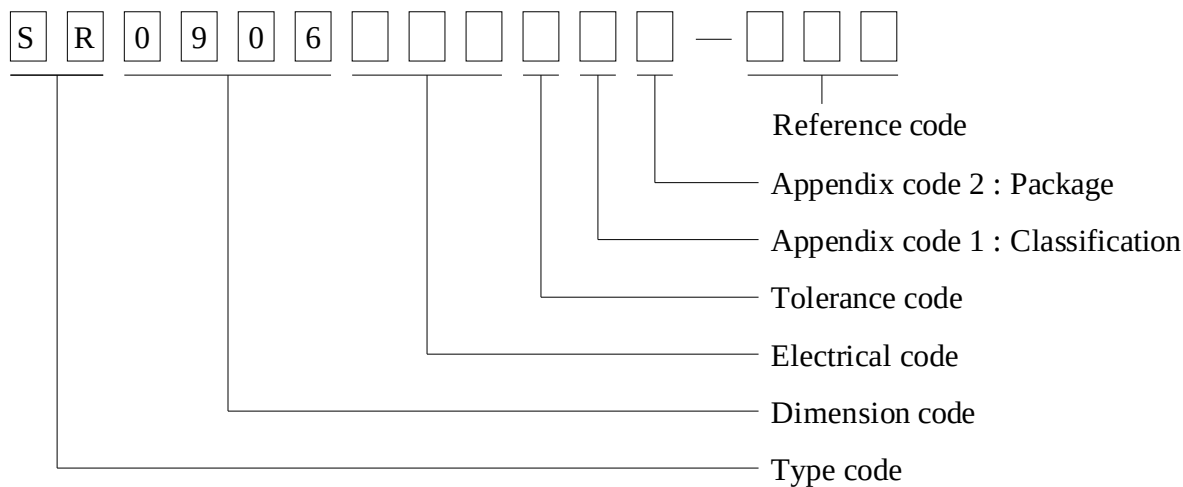

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements
 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel package)	600 PCS	
C	T / R (Reel package)	600 PCS	Hot-press

SPECIFICATION FOR APPROVAL

REF : 20080801-A

PAGE: 6

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0906□□□□L□-□□□
		ABC'S ITEM NO.	

IX . RELIABILITY TEST :

Test item	Specification	Test condition
Solderability	More than 95% of the terminal electrode Shall be covered With fresh solder.	Preheat : 155℃ / 4 hours. Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5℃ Flux : Rosin Dip time : 5±0.5 seconds
Thermal shock test (Temp. cycle)	Electrical oharacteristics shall not change more than ±20%	Room temp. → -40 ℃ 15 minutes 30 minutes Room temp. → +105 ℃ 15 minutes 30 minutes Total : 50 cycles
Humidity test		Temperature : 40±2℃ Humidity : 90±5% Time : 1000 hours
High temp. Resistance test		Temperature : 105±5℃ Applied current : Per spec. Time : 96 hours

AR-001A

SPECIFICATION FOR APPROVAL

REF : 20080801-A

PAGE: 7

PROD.	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0906□□□□L□-□□□
NAME		ABC'S ITEM NO.	

X . UL CARD :

OBMW2
Magnet Wire-Component
JUNG SHING WIRE CO LTD
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN
E174837

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	—	Polyamideimide	—	—	MW81-C	220
CFUEWB	—	Polyurethane	—	—	MW75C	130
ELAIW	—	Polyesterimide	Polyamideimide	—	MW35C	200
EILOCKY	—	Polyesterimide	Polyamide	—	—	180
EILOCKW	—	Polyesterimide	Modified Epoxy	—	—	200
EIW	—	Polyesterimide	—	—	—	220
EIW-2	—	Polyesterimide	—	—	MW74-C	200
FL.EILOCKY	—	Modified Polyester	Polyamide	—	—	155
LSFFW	—	Polyurethane	—	—	MW79-C	155
LSUEW	—	Polyurethane	—	—	—	130
PEW	—	Polyester	—	—	—	155
PEY	—	Polyester	Nylon	—	MW24-C	155
SF.FLW	—	Modified Polyester	—	—	MW26C	155
SF.EIW	—	Polyesterimide	—	—	MW77C	180
SF.BY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.FLY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.BLOCKBS	—	Modified Polyester	Modified Polyamide	—	—	155
SF.EILOCKY#	—	Polyesterimide	Polyamide	—	—	180
SF.EILOCKBS	—	Polyesterimide	Modified Polyamide	—	—	180
SF.BW@	—	Modified Polyester	—	—	MW26C	155
SFFW	—	Polyurethane	—	—	MW79	155

287806002

Page 1 of 2

A not-for-profit organization
dedicated to public safety and
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	—	Polyurethane	—	Polyamide	MW80C	155
UEW-1	—	Polyurethane	—	—	MW2-C	105
UEW-2	—	Polyurethane	—	—	—	130
UEW-4	—	Polyurethane	—	—	MW75C	130
UEY	—	Polyurethane	Nylon	—	MW28-C	130
UEY-2	—	Polyurethane	Polyamide	—	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.
LZ - Signifies magnet wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks JSW or 榮星電線, material designation or marked designation on package or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002

Page 2 of 2

OBMW2/E174837
September 8, 2000

AR-001A

 千如電子集團
ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL

REF : 20080801-A

PAGE: 8

PROD.	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0906□□□□L□-□□□
NAME		ABC'S ITEM NO.	

OBMW2		October 06, 2005			
Magnet Wire-Comporent					
ELEKTRISOLA (MALAYSLA) SDN BHD		E143312			
JALAN DAMAI SATU JANDA BAIK 28750 BENTONG, PAHANG					
DARUL MAKMUR MALAYSIA					
Mtl Dsg	Mark Dsg	Coating Type		ANSI Typ	Temp Class
		BC	OC		
Estersol 180	E180	Polyesterimide (solderable)	—	MW-77	180
Amldester 200	A200	Polyesterimide	—	MW-74	200
Polysol-N 155	PN155	Polyurethane	Nylon	MW-80,	155,
				MW-28	130
Polysol 155	P155, G155	Polyurethane	—	MW-79,	155,
				MW-75	130
Polysol 155g	Pg155	Polyurethane	—	MW-75	130
Polysol 155p	Pp155,Gp155	Polyurethane	—	MW-79	155
Polysol 160	P160	Polyurethane	—	MW-79	155
Polysol 180	P180,G180	Polyurethane	—	MW-82	180
				MW-79	155
Polysol 170	P170 or G170	Polyurethane	—	MW-79	155
Polysol-N 180	PN180	Polyurethane	Nylon	MW-83	180
Polysol P155p	P155p		—	MW-79	155
Marking : Company name, material designation or marked designation and factory identification on package ok reel					
See General Information preceding These Recognitions					
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.					

AR-001A