





SLIM插座 SLIM SOCKET

ESD01000

celduc 有直流输出的固态继电器SLD和交
流输出的固态继电器SLA， 且和电磁继电器
完全兼容。

*Compatible with Electromechanical Relays
and **celduc** solid state relays with DC
output SLD and AC output SLA*

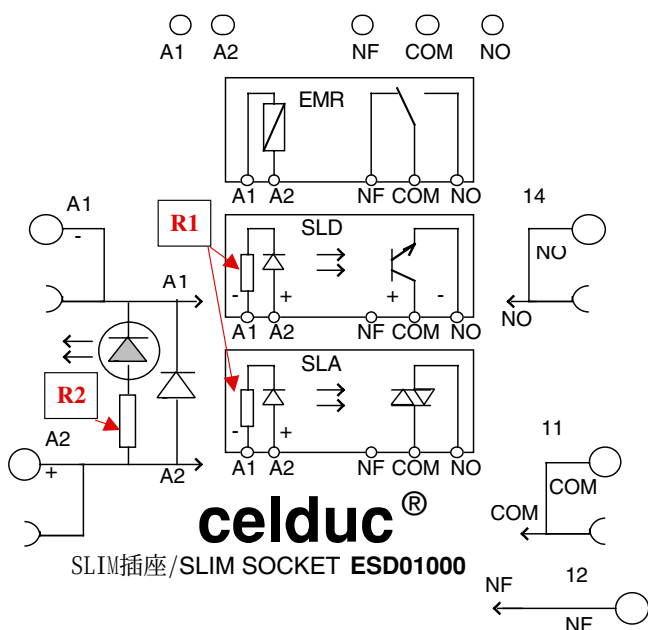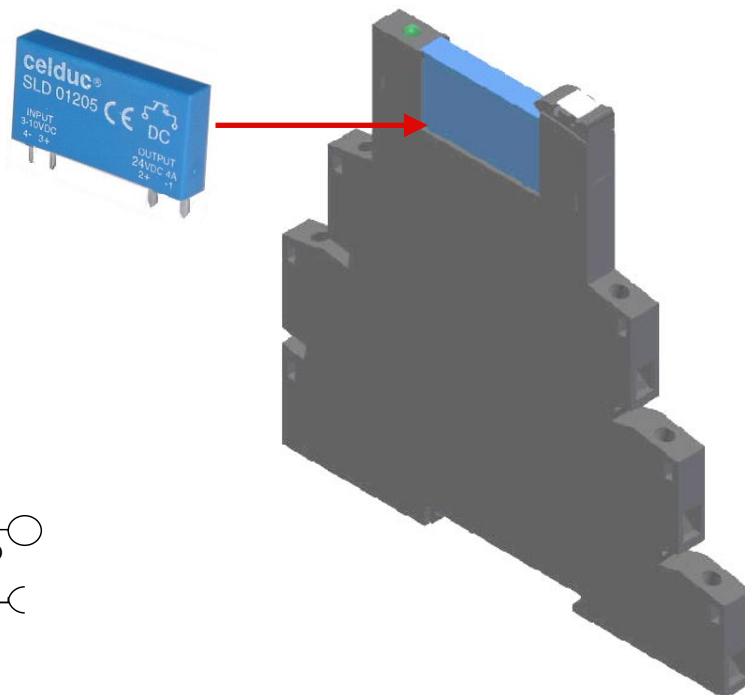


celduc SSR 型号/References	输入控制/ Input control A1 - A2	输出 /Output COM - NO	输入电阻/ Input Resistance R1 // R2 (Ohms)	输入电流/ Input Current
SLD01205	3-10VDC	24VDC 4A	300Ω	13mA @ 5VDC
SLD02205	7-20VDC	24VDC 4A	900Ω	12mA @ 12VDC
SLD03205	18-32VDC	24VDC 4A	1850Ω	12,5mA @ 24VDC
SLD01210	3-10VDC	48VDC 2,5A	300Ω	13mA @ 5VDC
SLD02210	7-20VDC	48VDC 2,5A	900Ω	12mA @ 12VDC
SLD03210	18-32VDC	48VDC 2,5A	1850Ω	12,5mA @ 24VDC
SLA01220	3-10VDC	12-280VAC 2A	300Ω	13mA @ 5VDC
SLA02220	7-20VDC	12-280VAC 2A	900Ω	12mA @ 12VDC
SLA03220	18-32VDC	12-280VAC 2A	1850Ω	12,5mA @ 24VDC

Proud to serve you

All technical characteristics are subject to change without previous notice.
Caractéristiques sujettes à modifications sans préavis.

celduc®
r e l a i s

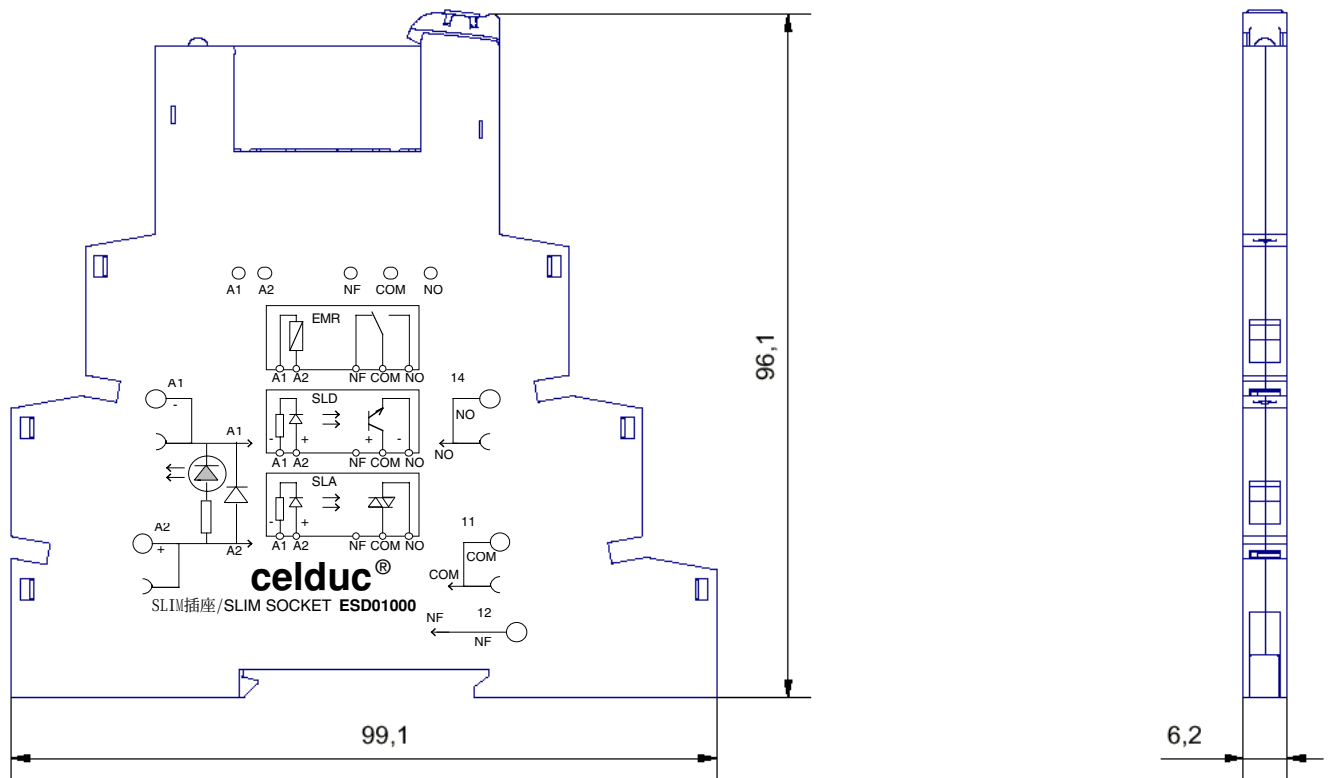


连接/Connections

最大导线 / Max. wire : 2,5 mm² / AWG 14

螺丝起子型号 / Screwdriver type : 2,5 x 0,5 mm

扭矩 / Screws torque : 0,5 Nm



塑料材料/Plastic Materials :

Material Designation: **Grilon TS V0**

Product Description: Polyamide 66/6 (PA66/6), designated "Grilon" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.4	V-0	4	0	125	-	-	-	-
	0.8	V-0	4	0	125	105	120	-	-
	1.5	V-0	3	0	125	105	120	-	960
	3.0	V-0	2	0	125	105	120	-	960

CTI: 0

IEC CTI: -

HVTR: 0

D495: 5

IEC Ball Pressure (°C): -

Dielectric Strength (kV/mm): -
ISO Tensile Strength (MPa): -
ISO Tensile Impact (kJ/m²): -

Volume Resistivity (10⁹ohm-cm): -
ISO Flexural Strength (MPa): -
ISO Izod Impact (kJ/m²): -

Dimensional Stability(%): -
ISO Heat Deflection (°C): -
ISO Charpy Impact (kJ/m²): -

Report Date: 2/24/1998

Underwriters Laboratories Inc®



ISO 9001
N° 1993/1106a

celduc®
r e l a i s

www.celduc.com

Rue Ampère B.P. 4

42290 SORBIERS - FRANCE

E-Mail : celduc-relais@celduc.com

Fax +33 (0) 4 77 53 85 51

Service Commercial France Tél. : +33 (0) 4 77 53 90 20

Sales Dept.For Europe Tel. : +33 (0) 4 77 53 90 21

Sales Dept. Asia : Tél. +33 (0) 4 77 53 90 19