


SKS 1080F B6C 730 V16



SEMISTACK Thyristor

Three-phase controlled bridge rectifier

SKS 1080F B6C 730 V16

Preliminary Data

Features

- P17/130 heatsink
- Presspack stack with double side cooling
- Forced air cooled

Typical Applications


- Industrial rectifiers
- Softstarters
- DC motor control
- AC controller

Options

- Fuse
- RC

No. 08754502

Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
Electrical Data					
I_d	$T_{amb} = 35^\circ\text{C}$	no overload		1080	A
		150 % overload, 60s every 10 min.	831	1247	A
		200 % overload, 60s every 10 min.	736	1468	A
V_{CES}				1600	V
V_{DC}	DC voltage applied to the capacitor bank			670	V
V_{AC}	network voltage (line side), -20% / +15%			500	V
V_{isol}	50 Hz / 1 min.		2500		V
i^2t	$T_{vj} = 25^\circ\text{C}$			660	kA^2s
	$T_{vj} = 125^\circ\text{C}$			500	kA^2s
$(di/dt)_{cr}$	$T_{vj} = 125^\circ\text{C}$			125	$\text{A}/\mu\text{s}$
$(dv/dt)_{cr}$				1000	$\text{V}/\mu\text{s}$
V_{GT}		3			V
I_{GT}		200			mA
P_{tot}	$T_{amb} = 35^\circ\text{C}$		3091		W
R_{thja}	per component		0.18		K/W
T_{vj}		-40		125	$^\circ\text{C}$
Fuse	No fuse		-		A
RC	No RC		-		Ω
RC	No RC		-		μF
Thermal trip	normally closed		95		$^\circ\text{C}$
Mechanical Data					
dv/dt_{AIR}					m^3/h
w	approx. total weight		38		kg
Size	Width x Depth x Height (with fan)	420	348	556	mm
T_{stg}		5		60	$^\circ\text{C}$
T_{amb}		5		60	$^\circ\text{C}$
Altitude	Installation height w/o derating			1000	m
Protection			IP00		
Pollution	EN 50178		2		
Fan Data					
Fan	included in the stack (YES)				
Type	SKF 17A-230-01				
V_{Fan}	Fan voltage		230		V
f_{FAN}	Fan frequency		50		Hz
I_{FAN}	Fan current		0.36		A
P_{FAN}	Fan power		83		W



B6C

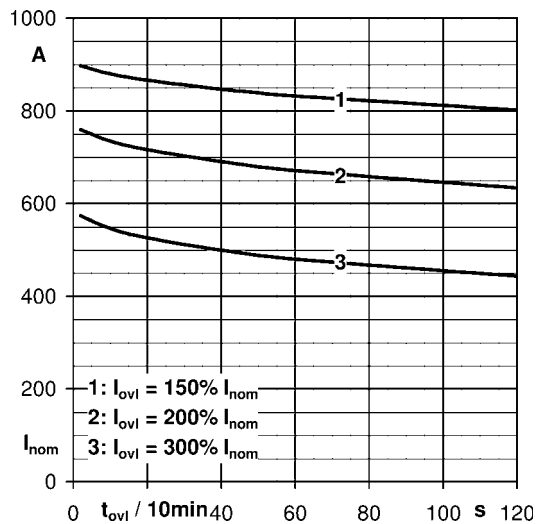


Fig. 1 Maximal overload factor vs nom current and ovl duration, $T_{amb} = 35^\circ\text{C}$

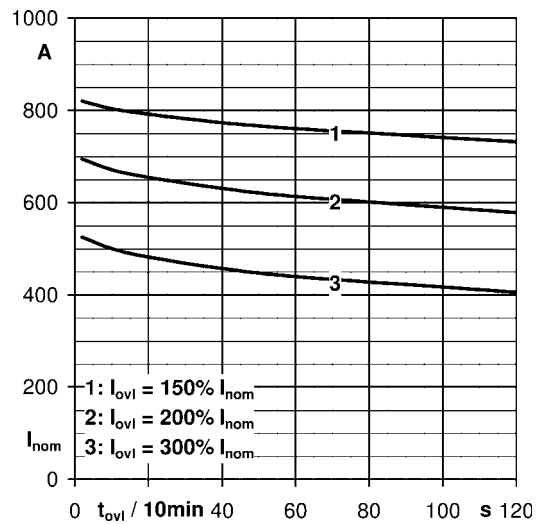


Fig. 2 Maximal overload factor vs nom current and ovl duration, $T_{amb} = 45^\circ\text{C}$

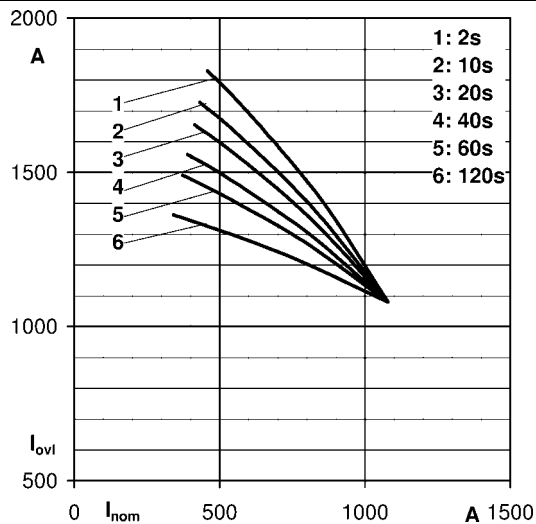


Fig. 3 Maximal overload duration vs nom current and ovl factor, $T_{amb} = 35^\circ\text{C}$

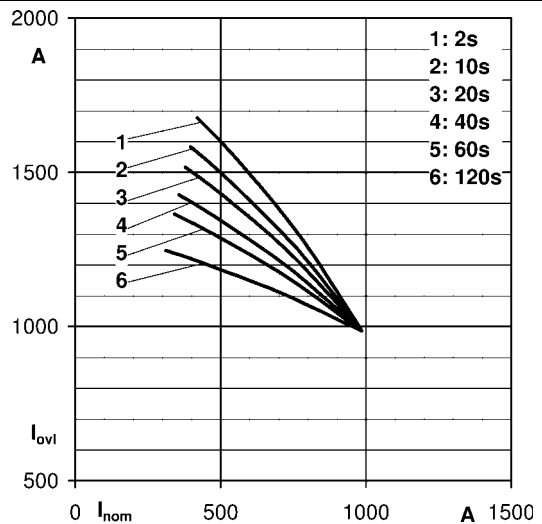


Fig. 4 Maximal overload duration vs nom current and ovl factor, $T_{amb} = 45^\circ\text{C}$

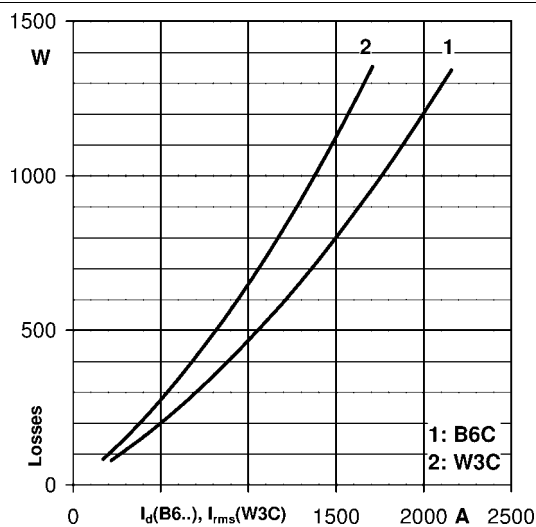


Fig. 5 Power losses



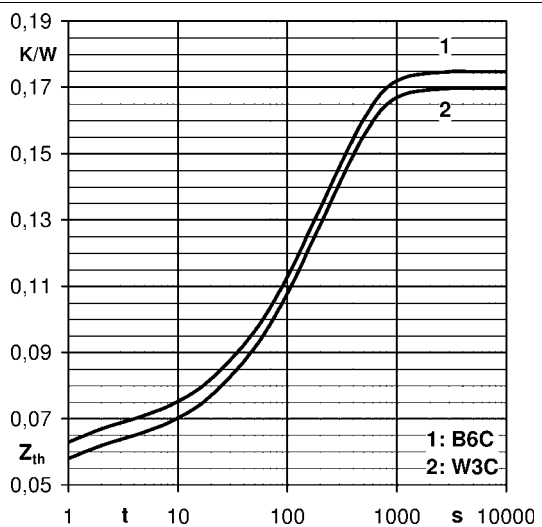


Fig. 6 Thermal impedance $Z_{th}(j-a)$

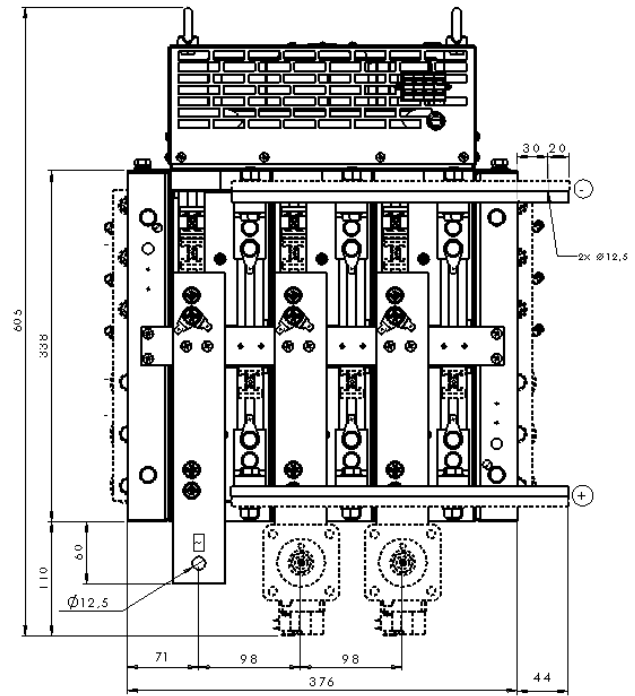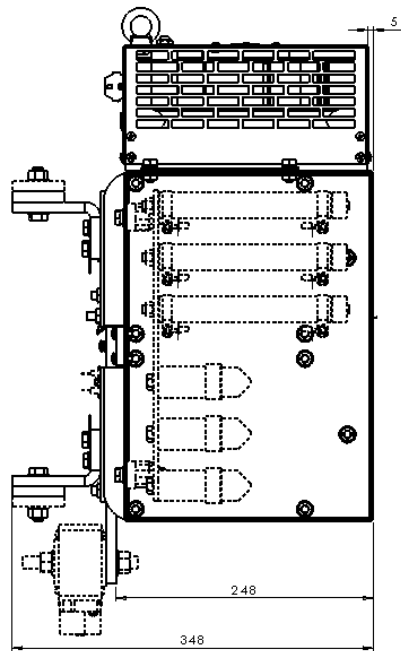

Note: Stack design may vary depending upon the version. Please contact SEMIKRON for further details.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.