



SEMIPONT® 4

Power Bridge Rectifiers

SKD 110

Features

- Robust plastic case with screw terminals
- Large, isolated base plate
- Blocking voltage up to 1800 V
- High surge currents
- Three phase bridge rectifier
- Easy chassis mounting
- UL recognized, file no. E 63 532

Typical Applications

- Three phase rectifiers for power supplies
- Input rectifiers for variable frequency drives
- Rectifiers for DC motor field supplies
- Battery charger rectifiers


¹⁾ Available in limited quantities

²⁾ Mounted on a painted metal sheet of min. 250 x 250 x 1 mm;






$$R_{th(c-a)} = 1,8 \text{ K/W}$$


V_{RSM} V	V_{RRM}, V_{DRM} V	$I_D = 110 \text{ A (full conduction)}$ ($T_c = 100^\circ \text{C}$)
800	800	SKD 110/08
1200	1200	SKD 110/12
1400	1400	SKD 110/14
1600	1600	SKD 110/16
1800	1800	SKD 110/18 ¹⁾

Symbol	Conditions	Values	Units
I_D	$T_c = 85^\circ \text{C}$	151	A
	$T_a = 45^\circ \text{C}; \text{chassis } ^2)$	28	A
	$T_a = 45^\circ \text{C}; P1/200$	70	A
	$T_a = 35^\circ \text{C}; P1/120 \text{ F}$	110	A
	$T_a = 35^\circ \text{C}; P3/120 \text{ F}$	123	A
I_{FSM}	$T_{vj} = 25^\circ \text{C}; 10 \text{ ms}$	1200	A
i^2t	$T_{vj} = 150^\circ \text{C}; 10 \text{ ms}$	1000	A
	$T_{vj} = 25^\circ \text{C}; 8,3 \dots 10 \text{ ms}$	7200	A ² s
	$T_{vj} = 150^\circ \text{C}; 8,3 \dots 10 \text{ ms}$	5000	A ² s
V_F	$T_{vj} = 25^\circ \text{C}; I_F = 300 \text{ A}$	max. 1,9	V
$V_{(TO)}$	$T_{vj} = 150^\circ \text{C}$	max. 0,85	V
r_T	$T_{vj} = 150^\circ \text{C}$	max. 4	mΩ
I_{RD}	$T_{vj} = 25^\circ \text{C}; V_{DD} = V_{DRM}; V_{RD} = V_{RRM}$	max. 0,5	mA
	$T_{vj} = 150^\circ \text{C}; V_{RD} = V_{RRM}$	5	mA
$R_{th(j-c)}$	per diode	0,9	K/W
	total	0,15	K/W
	$R_{th(c-s)}$ total	0,03	K/W
T_{vj}		- 40 ... + 150	°C
T_{stg}		- 40 ... + 125	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 (3000)	V
M_s	to heatsink	5 ± 15 %	Nm
M_t	to terminals	5 ± 15 %	Nm
m		270	g
Case		G 37	

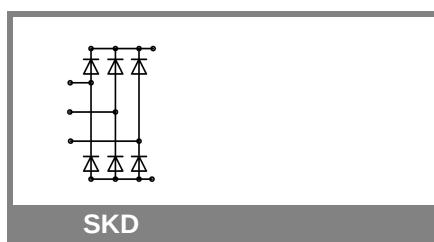

SKD

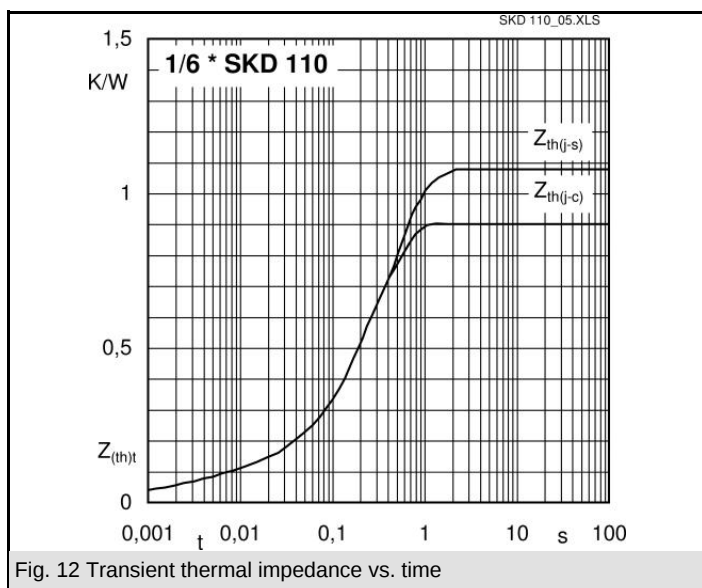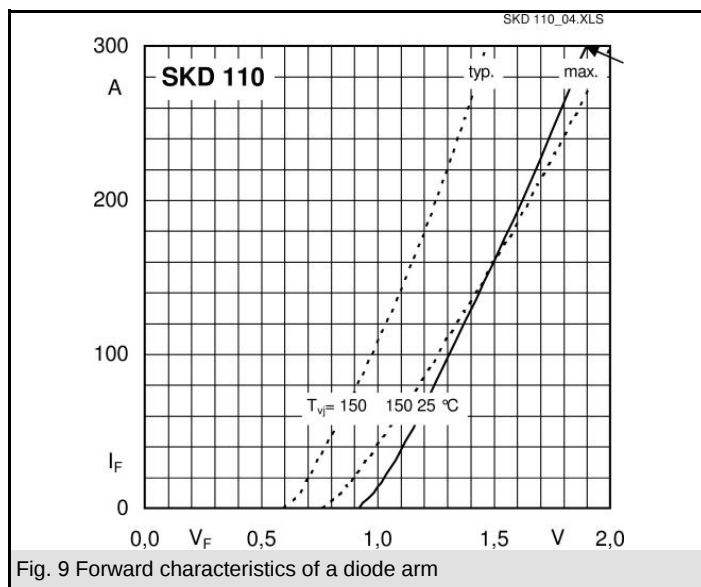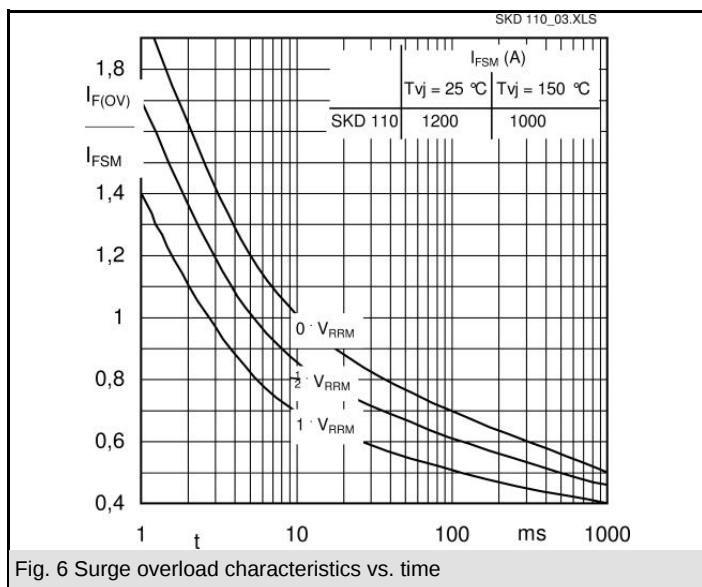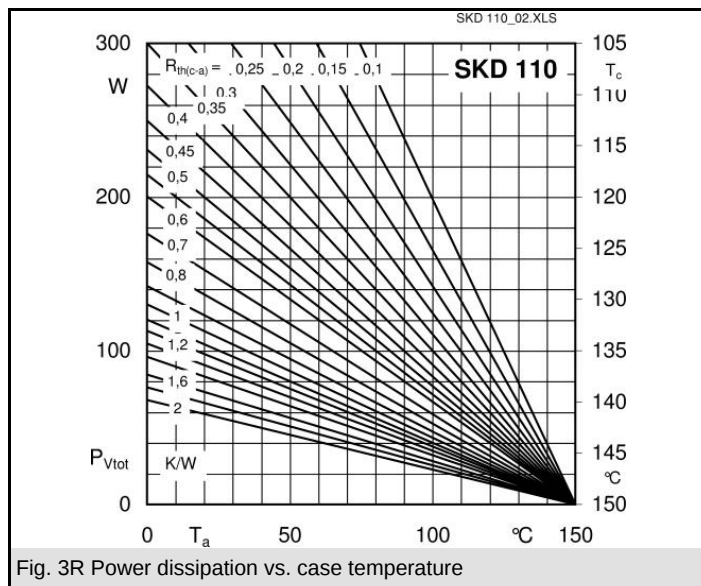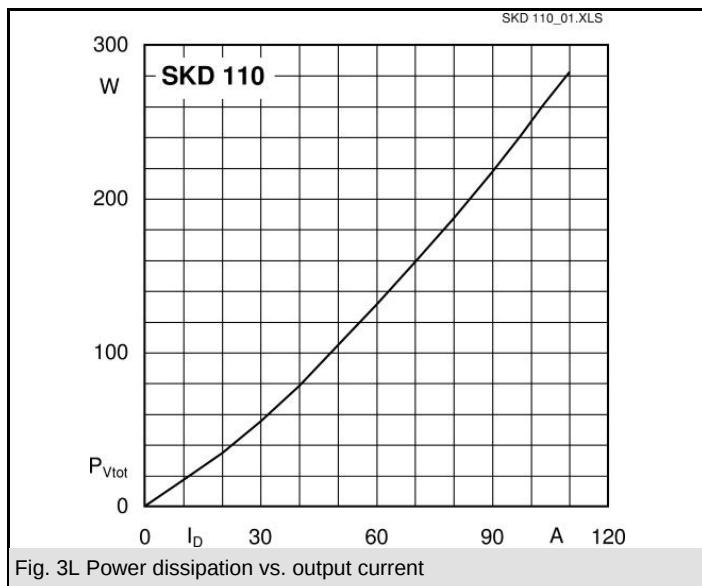

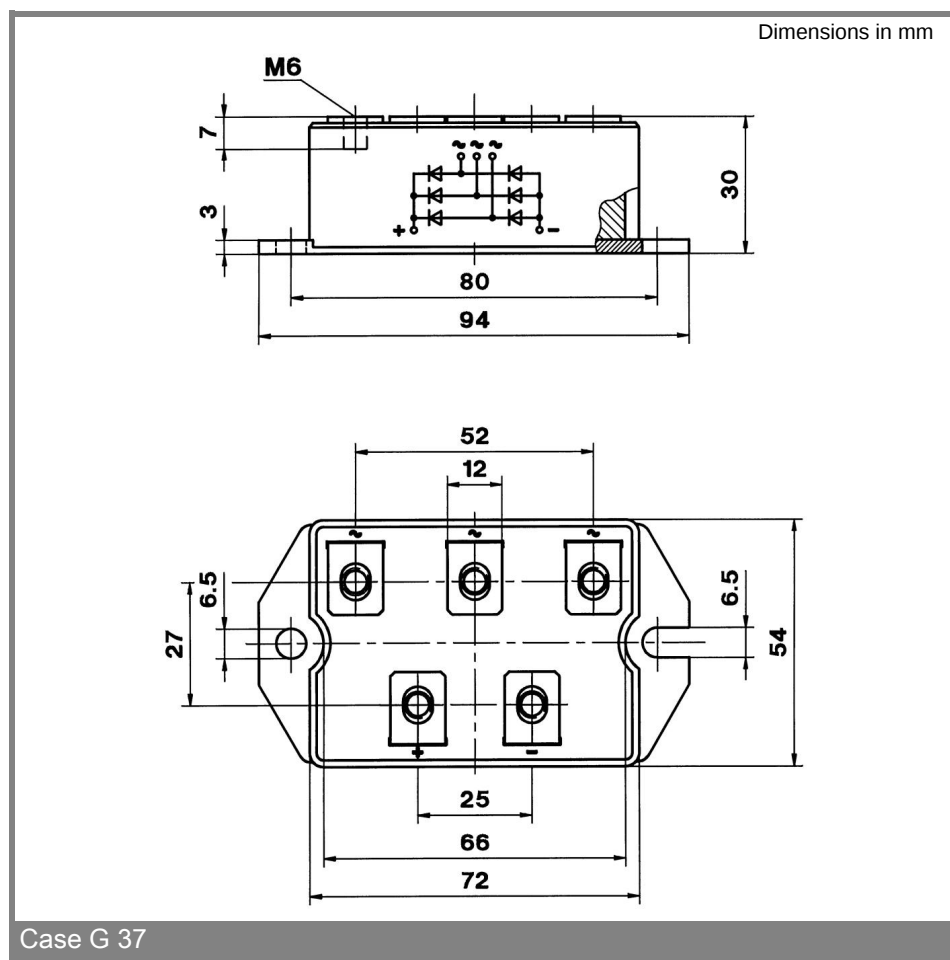

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.