





P-Channel 30-V (D-S) MOSFET with Schottky Diode

MOSFET PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-30	0.085 @ $V_{GS} = -10$ V	± 3.5
	0.180 @ $V_{GS} = -4.5$ V	± 2.5

SCHOTTKY PRODUCT SUMMARY		
V_{KA} (V)	V_F (V) Diode Forward Voltage	I_F (A)
30	0.5 V @ 1.0 A	1.4

LITTLE FOOT Plus™

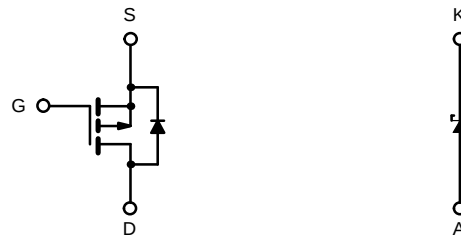

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter		Symbol	Limit	Unit
Drain-Source Voltage (MOSFET)		V_{DS}	-30	V
Reverse Voltage (Schottky)		V_{KA}	30	
Gate-Source Voltage (MOSFET)		V_{GS}	± 20	
Continuous Drain Current ($T_J = 150^\circ\text{C}$) (MOSFET) ^{a, b}	$T_A = 25^\circ\text{C}$	I_D	± 3.5	A
	$T_A = 70^\circ\text{C}$		± 2.8	
Pulsed Drain Current (MOSFET)		I_{DM}	± 20	
Continuous Source Current (MOSFET Diode Conduction) ^{a, b}		I_S	-1.7	
Average Forward Current (Schottky)		I_F	1.4	
Pulsed Forward Current (Schottky)		I_{FM}	30	
Maximum Power Dissipation (MOSFET) ^{a, b}	$T_A = 25^\circ\text{C}$	P_D	2	W
	$T_A = 70^\circ\text{C}$		1.3	
Maximum Power Dissipation (Schottky) ^{a, b}	$T_A = 25^\circ\text{C}$		1.9	
	$T_A = 70^\circ\text{C}$		1.2	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS					
Parameter	Device	Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ($t \leq 10$ sec) ^a	MOSFET	R_{thJA}		62.5	$^\circ\text{C/W}$
	Schottky			65	
Maximum Junction-to-Ambient ($t = \text{steady state}$) ^a	MOSFET		90		
	Schottky		92		

Notes

- a. Surface Mounted on FR4 Board.
b. $t \leq 10$ sec.



MOSFET SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = -250\ \mu\text{A}$	-1.0			V
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\ \text{V}$, $V_{GS} = \pm 20\ \text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -30\ \text{V}$, $V_{GS} = 0\ \text{V}$			-1	μA
		$V_{DS} = -30\ \text{V}$, $V_{GS} = 0\ \text{V}$, $T_J = 55^\circ\text{C}$			-25	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \geq -5\ \text{V}$, $V_{GS} = -10\ \text{V}$	-15			A
Drain-Source On-State Resistance ^a	$r_{DS(on)}$	$V_{GS} = -10\ \text{V}$, $I_D = -2.5\ \text{A}$		0.066	0.085	Ω
		$V_{GS} = -4.5\ \text{V}$, $I_D = -1.8\ \text{A}$		0.125	0.180	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -10\ \text{V}$, $I_D = -2.5\ \text{A}$		5.0		S
Diode Forward Voltage ^a	V_{SD}	$I_S = -1.7\ \text{A}$, $V_{GS} = 0\ \text{V}$		-0.8	-1.2	V
Dynamic^b						
Total Gate Charge	Q_g	$V_{DS} = -10\ \text{V}$, $V_{GS} = -10\ \text{V}$, $I_D = -2.5\ \text{A}$		8.7	15	nC
Gate-Source Charge	Q_{gs}			1.9		
Gate-Drain Charge	Q_{gd}			1.3		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -10\ \text{V}$, $R_L = 10\ \Omega$ $I_D \approx -1\ \text{A}$, $V_{GEN} = -10\ \text{V}$, $R_G = 6\ \Omega$		7	15	ns
Rise Time	t_r			9	18	
Turn-Off Delay Time	$t_{d(off)}$			14	27	
Fall Time	t_f			8	15	
Source-Drain Reverse Recovery Time	t_{rr}	$I_F = -1.7\ \text{A}$, $di/dt = 100\ \text{A}/\mu\text{s}$		50	80	

Notes

a. Pulse test; pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.







b. Guaranteed by design, not subject to production testing.

SCHOTTKY SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage Drop	V_F	$I_F = 1.0\ \text{A}$		0.45	0.5	V
		$I_F = 1.0\ \text{A}$, $T_J = 125^\circ\text{C}$		0.36	0.42	
Maximum Reverse Leakage Current	I_{rm}	$V_r = 30\ \text{V}$		0.004	0.100	mA
		$V_r = 30\ \text{V}$, $T_J = 100^\circ\text{C}$		0.7	10	
		$V_r = -30\ \text{V}$, $T_J = 125^\circ\text{C}$		3.0	20	
Junction Capacitance	C_T	$V_r = 10\ \text{V}$		62		pF








TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

MOSFET

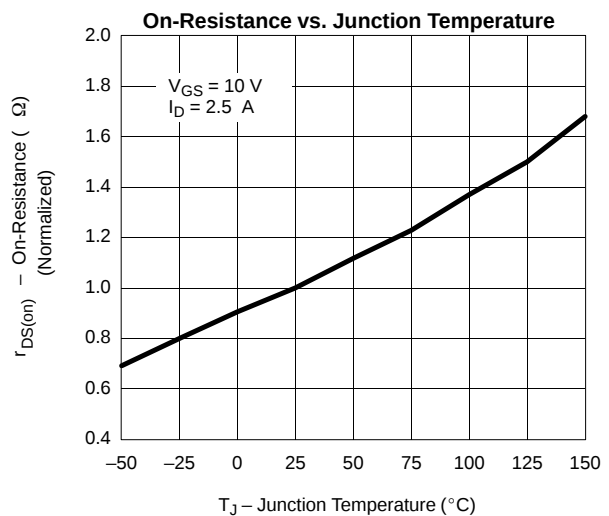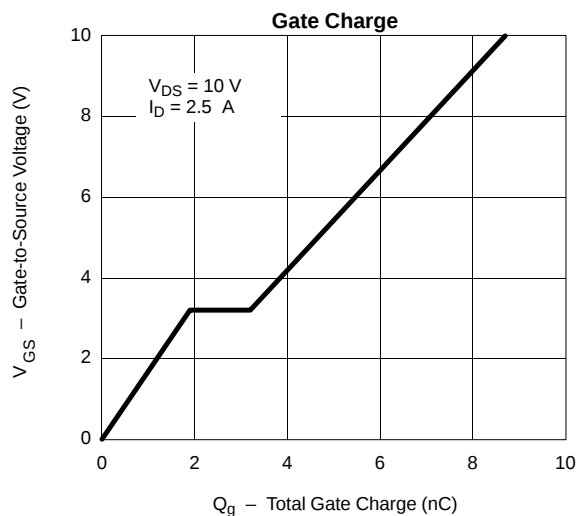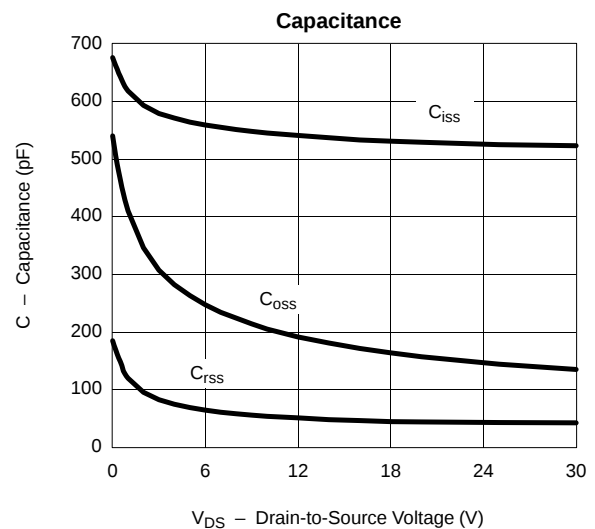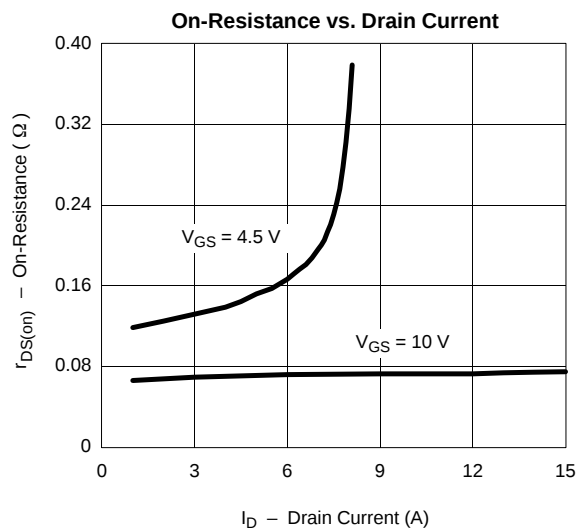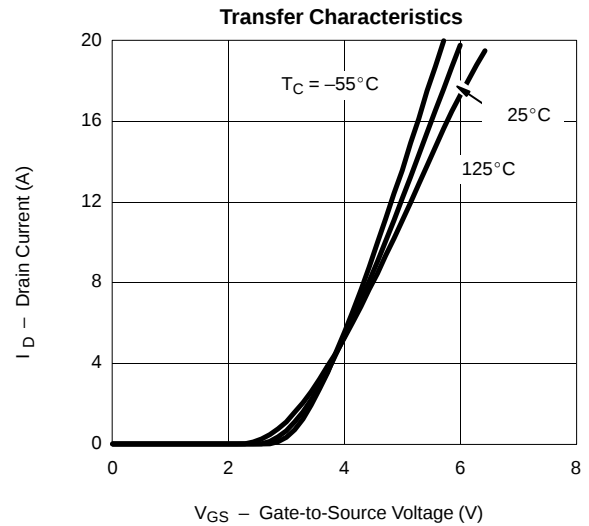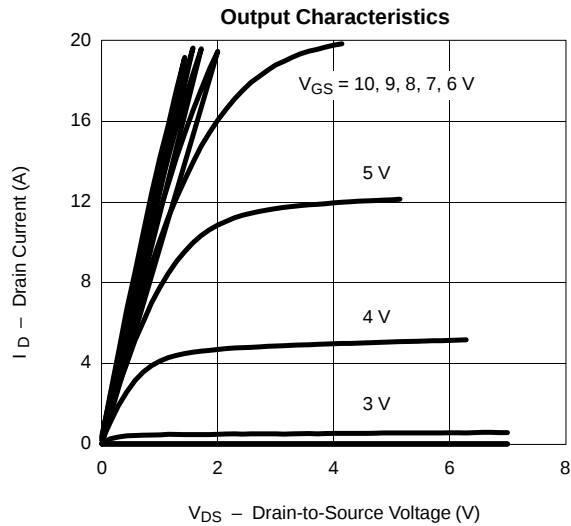

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)





MOSFET

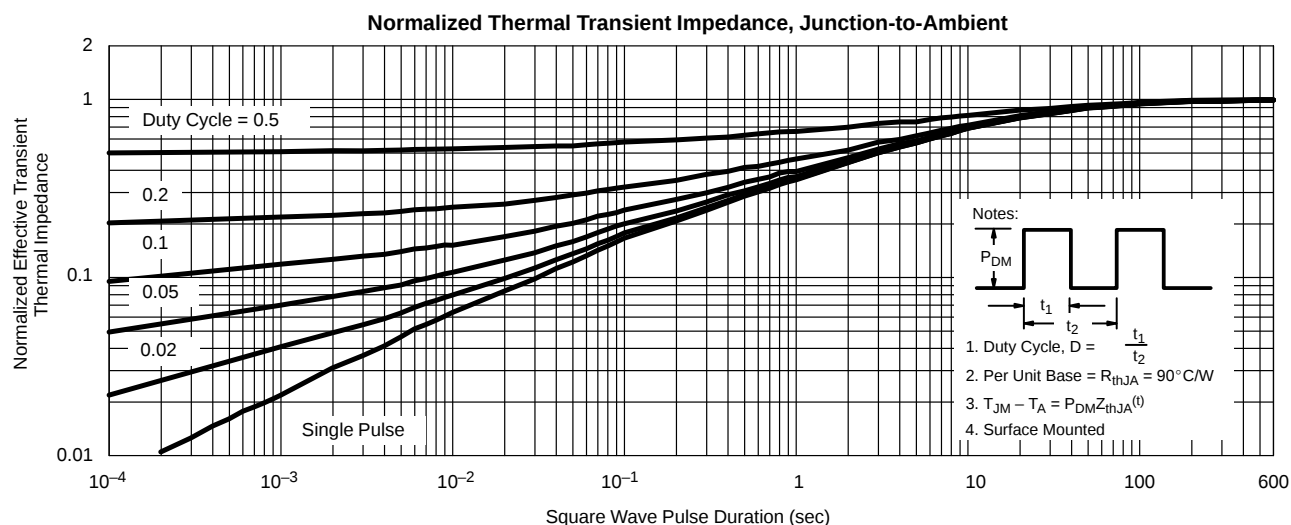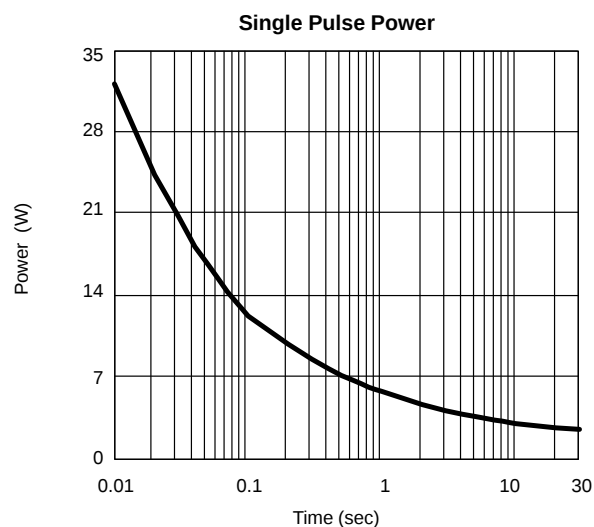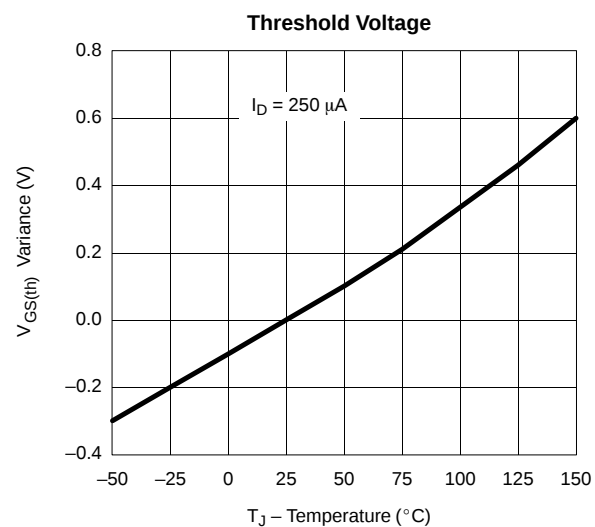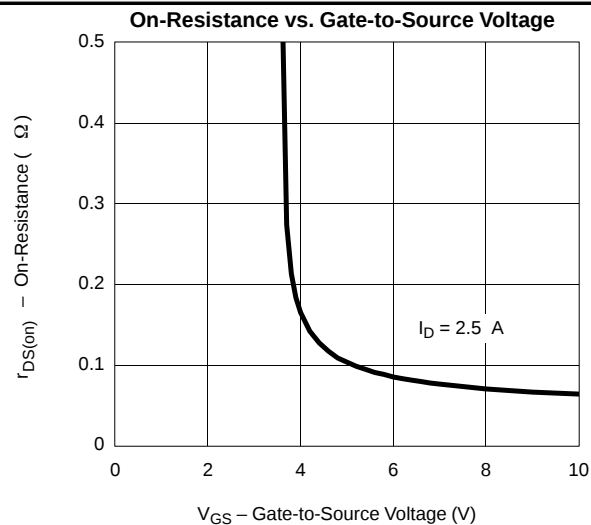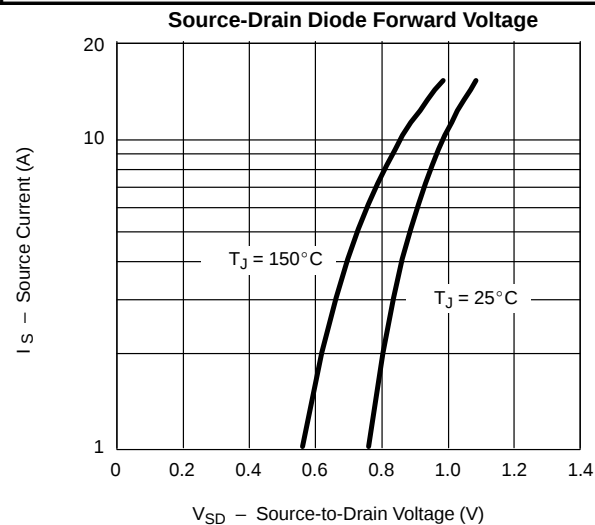



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

SCHOTTKY

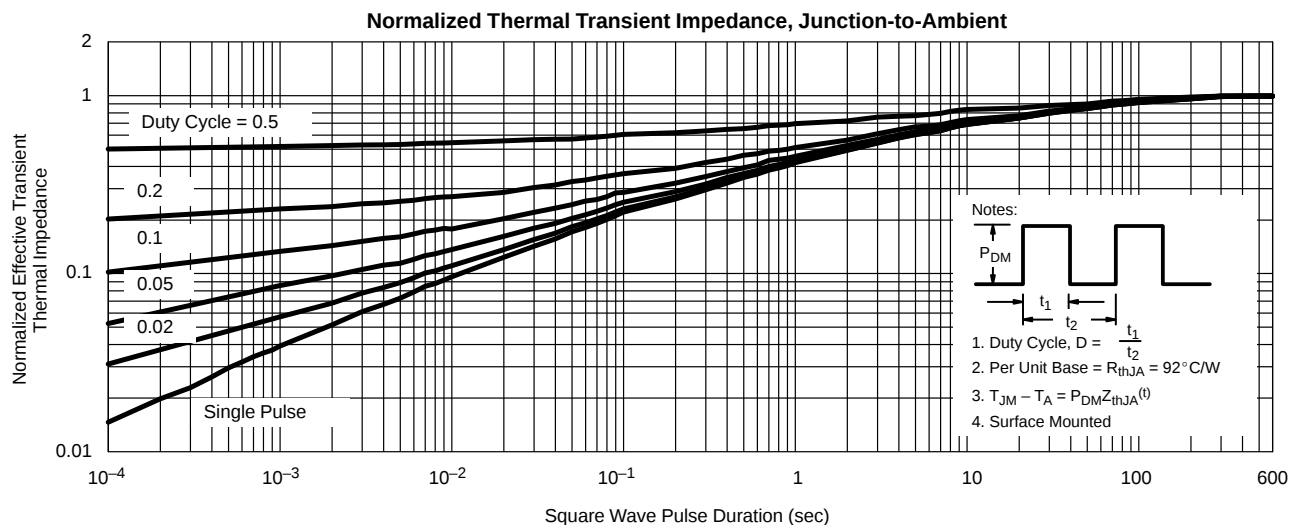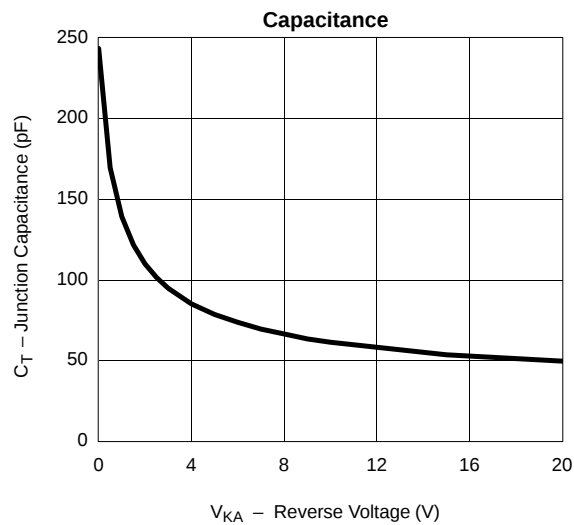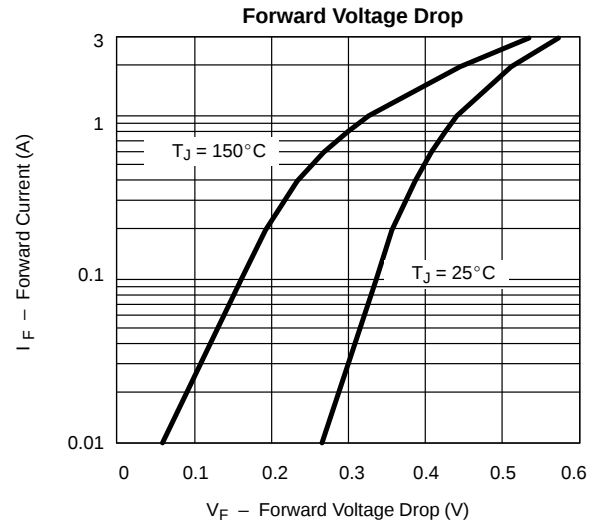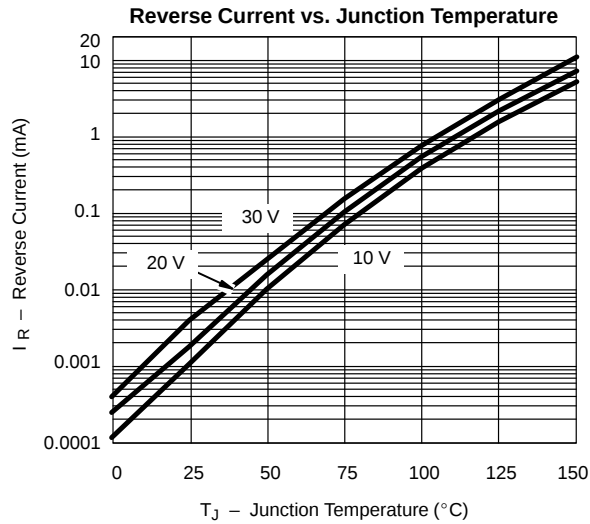



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.