


SFM101 thru SFM108

SURFACE MOUNT GLASS PASSIVATED SUPER FAST SILICON RECTIFIERS



DO-213AB / MELF

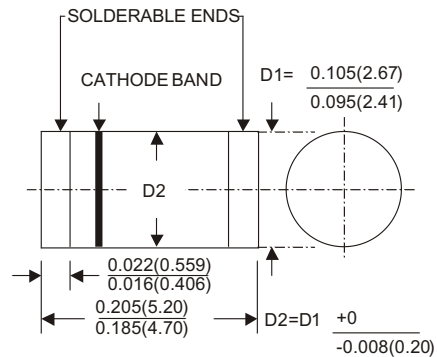

Dimension in inches (millimeters)

FEATURES

- Ideal for surface mounted applications
- Easy pick and place
- Low leakage current
- Glass passivated chips
- Fast switching
- Metallurgically bonded construction
- High temperature soldering guaranteed :
250°C/10 seconds/.375" , (9.5mm) lead lengths

MECHANICAL DATA

Case : Molded plastic use UL94V-0 recognized flame retardant epoxy

Terminals : Plated terminals, solderable per MIL-STD-202, Method 208

Polarity : Red Color band on body denotes cathode

Mounting position : Any

Weight : 0.12gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temp. unless otherwise specified
Single phase, half sine wave, 60Hz, resistive or inductive load

	SYMBOL	SFM 101	SFM 102	SFM 103	SFM 104	SFM 105	SFM 106	SFM 107	SFM 108	UNITS
Maximum Current Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	500	600	Volts
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	350	420	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	500	600	Volts
Maximum Average Forward Rectified Current 375" , (9.5mm) lead length at T _T =55°C	I _(AV)	1.0								Amps
Peak Forward Surge Current ,8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	30								Amps
Maximum Instantaneous Forward Voltage at 1.0A	V _F	1.0				1.3			1.7	Volts
Maximum DC Reverse Current @T _A =25°C at Rated DC Blocking Voltage T _A = 125°C	I _R	5.0 100								μ A
Maximum Reverse Recovery Time (Note 1)	T _{RR}	35								nS
Typical Junction Capacitance (Note 2)	C _J	50				25				pF
Typical Junction Capacitance	R θ JA R θ JC	60 20								°C / W
Operating Temperature Range T _J	T _J	-65 to +125								°C
Storage Temperature Range T _{STG}	T _{STG}	-65 to +150								°C

NOTES :

1. Reverse Recovery Test Conditions : $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C

SFM101 thru SFM108

SURFACE MOUNT GLASS PASSIVATED SUPER FAST SILICON RECTIFIERS

RATING AND CHARACTERISTICS CURVES SFM101 THRU SFM108

