


SPECIFICATION FOR APPROVAL

REF :

PAGE : 1


PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0503□□□□L□-□□□
		ABC'S ITEM NO.	

I . CONFIGURATION & DIMENSIONS :

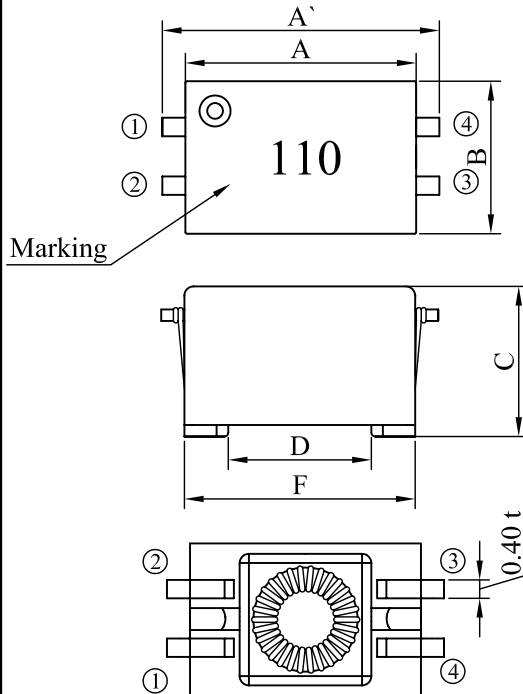


A' :	6.00 ± 0.3	m/m
A :	5.00 ± 0.3	m/m
B :	3.30 ± 0.3	m/m
C :	3.30 ± 0.2	m/m
D :	3.10	typ. m/m
E :	1.27	typ. m/m
F :	5.00	typ. m/m
G :	2.70	typ. m/m
H :	0.60	ref. m/m
I :	1.27	ref. m/m
J :	6.40	ref. m/m

II . SCHEMATIC DIAGRAM :



(PCB Pattern)

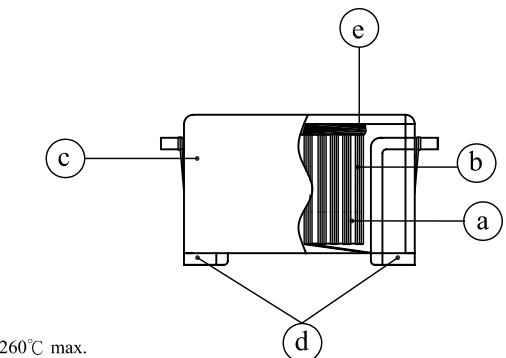


III . MATERIAL DESCRIPTION :

- a . Core : Ferrite core
- b . Wire : Enamelled copper wire (Class F)
- c . Base : LCP (UL94V-0)
- d . Terminal : Cu / Ni / Sn
- e . Adhesive : Epoxy resin
- f . Remark : Products comply with RoHS' requirements

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 25°C max. at rated current
- b . Storage temp. : -40°C ---- +125°C
- c . Operating temp. : -40°C ---- +105°C
- d . Resistance to solder heat : 260°C. 10 secs.

Peak Temp : 260°C max.
Max time above 230°C : 50sec max.
Max time above 200°C : 70sec max.

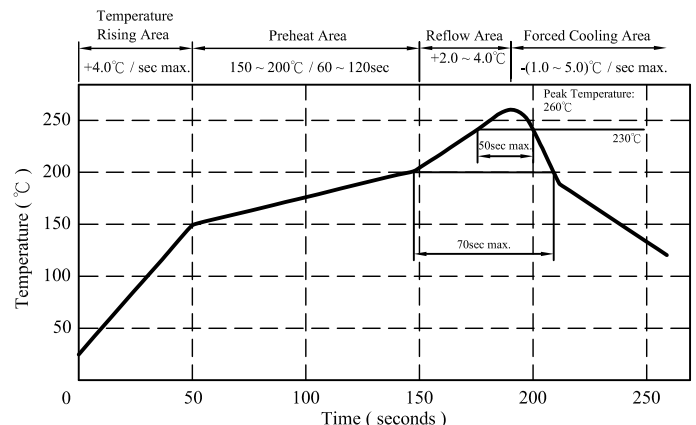

AR-001A


千如電子集團
 ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL

REF :

PAGE : 2

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0503□□□□L□-□□□
		ABC'S ITEM NO.	



V . ELECTRICAL CHARCTERISTICS :

DWG No.	L1 , L2 @ 10KHz , 0.1 Vrms (μ H)	FREQ. Range (MHz)	Impedance min. (Ω)	RDC(Ω) (Each Winding)		Rated Current(mA) typ.
				max.	typ.	
SF0503110YL□-□□□	11.0 ^{+50%} _{-30%}	100~400	450	0.18	0.13	100
SF0503220YL□-□□□	22.0 ^{+50%} _{-30%}	40~250	900	0.23	0.17	100
SF0503330YL□-□□□	33.0 ^{+50%} _{-30%}	30~180	1000	0.27	0.20	100
SF0503500YL□-□□□	50.0 ^{+50%} _{-30%}	20~60	1200	0.32	0.24	100

- 1). □ : Packaging information ... [A]: Bulk [B]: Taping Reel
- 2). "- □□□ ":Reference code
- 3). Rated voltage 50 Vdc / 100 Vdc(ref.)
- 4). Hi-Pot (N-N) : 500 Vac / 60 Hz , 3 mA / 1sec.

VI . CHARACTERISTICS CURVE :

IMPEDANCE VS. FREQUENCY

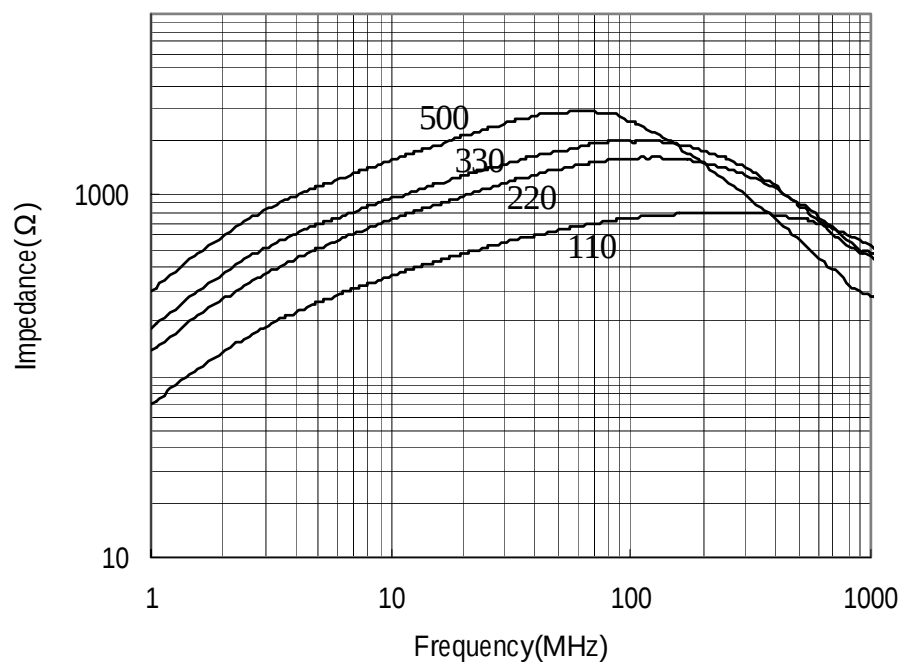

SPECIFICATION FOR APPROVAL



REF :

PAGE: 3

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0503□□□□L□-□□□
		ABC'S ITEM NO.	

VII . PACKAGING INFORMATION :

(1) Configuration

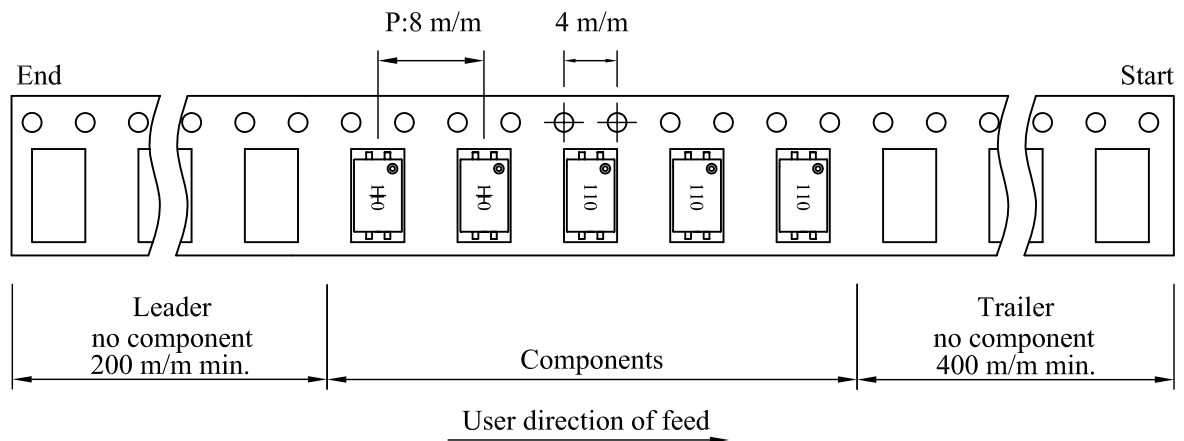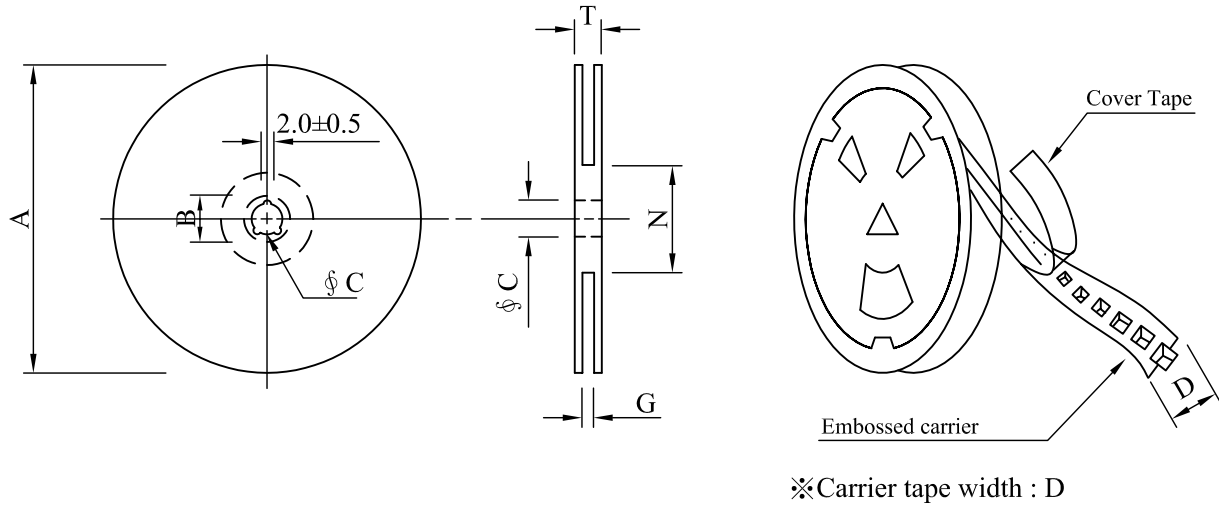

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
07 - 16	178	21±0.8	13	16	18 ⁺⁰	50 ⁻⁰	20.5

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SF0503	500	50	07 - 16	15,000	2.5	42 x 41 x 24


SPECIFICATION FOR APPROVAL

REF :

PAGE: 4

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0503□□□□L□-□□□
		ABC'S ITEM NO.	

VIII . DWGING NUMBER EXPRESSION :

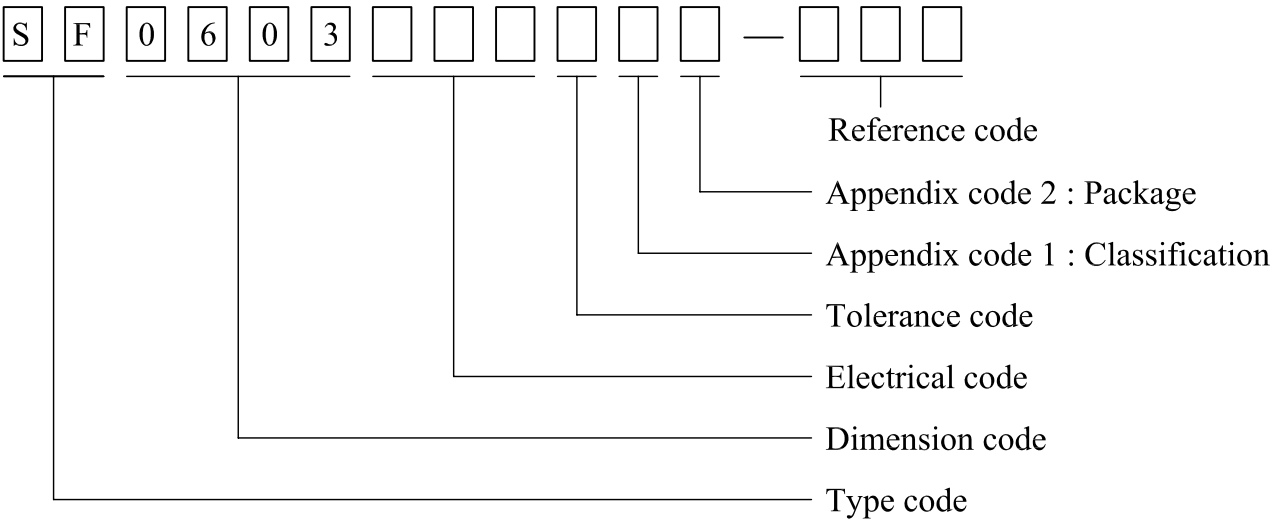

Appendix code 1 : Product Classification

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner Package	Inner Package Q'TY	Remark
A	Empty	Empty	
B	T / R (Reel Package)	500 PCS	

SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD.	SMD LINE FILTER	ABC'S DWG NO.	SF0503□□□□L□-□□□
NAME		ABC'S ITEM NO.	

IX . RELIABILITY TEST :

Test item	Specification	Test condition
Solderability	More than 90% of the terminal electrode Shall be covered With fresh solder.	Preheat : 150±25℃ for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5℃ Flux : Rosin Dip time : 4±1 seconds
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±35%	Room temp. —————→ -25±2 °C 15 minutes

AR-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD.	SMD LINE FILTER	ABC'S DWG NO.	SF0503□□□□L□-□□□
NAME		ABC'S ITEM NO.	

X . UL CARD :

OBMW2
Magnet Wire-Component
JUNG SHING WIRE CO LTD
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN
September 8, 2000
E174837

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	—	Polyamideimide	—	—	MW81-C	220
CFUEWB	—	Polyurethane	—	—	MW75C	130
EIAIW	—	Polyesterimide	Polyamideimide	—	MW35C	200
EILOCKY	—	Polyesterimide	Polyamide	—	—	180
EILOCKW	—	Polyesterimide	Modified Epoxy	—	—	200
EIW	—	Polyesterimide	—	—	—	220
EIW-2	—	Polyesterimide	—	—	MW74-C	200
FL.EILOCKY	—	Modified Polyester	Polyamide	—	—	155
LSFFW	—	Polyurethane	—	—	MW79-C	155
LSUEW	—	Polyurethane	—	—	—	130
PEW	—	Polyester	—	—	—	155
PEY	—	Polyester	Nylon	—	MW24-C	155
SF.FLW	—	Modified Polyester	—	—	MW26C	155
SF.EIW	—	Polyesterimide	—	—	MW77C	180
SF.BY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.FLY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.BLOCKBS	—	Modified Polyester	Modified Polyamide	—	—	155
SF.EILOCKY#	—	Polyesterimide	Polyamide	—	—	180
SF.EILOCKBS	—	Polyesterimide	Modified Polyamide	—	—	180
SF.BW@	—	Modified Polyester	—	—	MW26C	155
SFFW	—	Polyurethane	—	—	MW79	155

287806002

Page 1 of 2

A not-for-profit organization
dedicated to public safety and
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	—	Polyurethane	Polyamide	—	MW80C	155
UEW-1	—	Polyurethane	—	—	MW2-C	105
UEW-2	—	Polyurethane	—	—	—	130
UEW-4	—	Polyurethane	—	—	MW75C	130
UEY	—	Polyurethane	Nylon	—	MW28-C	130
UEY-2	—	Polyurethane	Polyamide	—	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.

LZ - Signifies magned wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks JSW or 榮星電線, material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions

For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002

Page 2 of 2

OBMW2E174837
September 8, 2000

AR-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 7

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0503□□□□L□-□□□
		ABC'S ITEM NO.	

SUMITOMO CHEMICAL CO LTD										E54705 (M)		
5-33 KITAHAMA 4-CHOME CHUO-KO, OSAKA JAPAN												
Mtl Dsg	Col	Min	UL94	Elec	RTI	Mech	w/o	H	H	H	D	C
		Thk	Flame		with			W	A	T	4	T
		mm	Class		Imp		Imp	I	I	R	5	I
Liquid crystal polyester (LCP), designated "EKONOL" or "SUMIKASUPER", furnished in the form of pellets, (Contd)												
E4008 , E400X	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4	—
E4008	NC , WT , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4	—
E4010	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4	—
E400(Y)L , E4008L	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4	—
E4810	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	130	130	130	0	4	—	—	—	—
		1.5	94V-0	130	130	130	0	4	—	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4	—
(X) Denotes any number 1 thru 9.												
(Y) Denotes any number 1 thru 7.												