


SPECIFICATION FOR APPROVAL

REF : 20070803-A


PAGE: 1

PROD.	SMD LINE FILTER	ABC'S DWG NO.	SF0603□□□□L□-□□□
NAME		ABC'S ITEM NO.	

CONFIGURATION & DIMENSIONS :

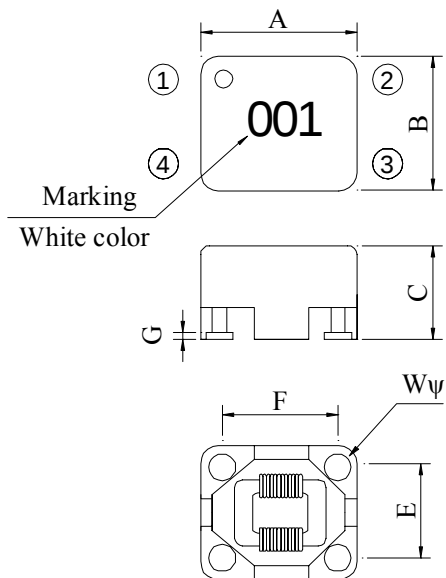


A :	5.80±0.30	m / m
B :	5.00±0.30	m / m
C :	3.50 max.	m / m
E :	3.50 typ.	m / m
F :	4.20 typ.	m / m
G :	0.30 min.	m / m
Wψ :	1.20±0.20	m / m



(PCB Pattern Suggestion)

SCHEMATIC DIAGRAM :




MATERIALS :


- a . Core : Ferrite core
- b . Wire : Enamelled copper wire
- c . Base : DAP 9100F base
- d . Terminal : Cu / Ni /Sn
Ni plating 1.5 um min.
Sn plating 7 um min. after soldering
- e . Adhesive : Epoxy resin
- f . Remark : Products comply with RoHS' requirements

GENERAL SPECIFICATION :

- a . Temp. rise : 40 max. at rated current
- b . Storage temp. : -40 ----+120
- c . Operating temp. : -40 ----+125
(included Temp. rise)
- d . Resistance to solder heat : 260 .10 secs.

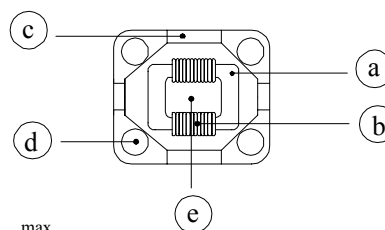

Peak Temp : 260 max.
Max time above 230 : 50sec max.
Max time above 200 : 70sec max.

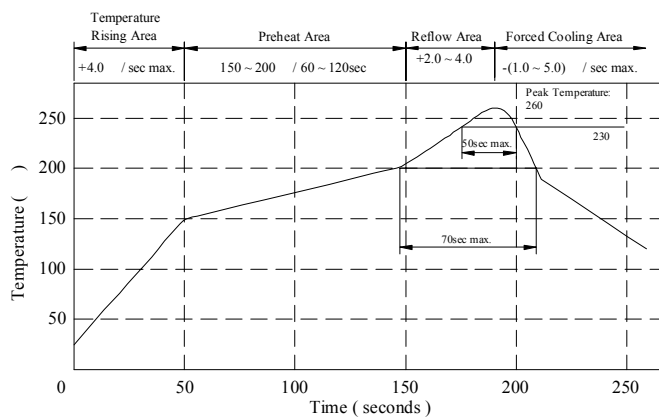

AR-001A

SPECIFICATION FOR APPROVAL

REF : 20070803-A

PAGE: 2

PROD.	SMD LINE FILTER	ABC'S DWG NO.	SF0603□□□□L□-□□□
NAME		ABC'S ITEM NO.	

. ELECTRICAL CHARACTERISTICS :

DWG No.	L1 , L2 (μ H) 0.1V/1MHz	Impedance (Z)	RDC ($m\Omega$ max.)	HI-POT Test
SF0603001YL□-□□□	1.00 $\pm$ 25%	300 $\pm$ 25%	25	240 VDC 60 Hz 1 mA 2 sec
SF0603002YL□-□□□	2.80 $\pm$ 25%	800 $\pm$ 25%	100	
SF0603003YL□-□□□	3.40 $\pm$ 25%	1000 $\pm$ 25%	150	
SF0603004YL□-□□□	0.48 $\pm$ 25%	250 $\pm$ 40%	25	
SF0603005YL□-□□□	1.50 $\pm$ 25%	1000 $\pm$ 40%	100	
SF0603006YL□-□□□	2.30 $\pm$ 25%	1500 $\pm$ 40%	150	

1). Packing information : ☐A : Bulk ☐B : Taping Reel

2). "-□□□" : Reference code

3). Test equipment : Inductance (WK3260B)
RDC (CH-502AC)
Impedance (E4991A)

SPECIFICATION FOR APPROVAL


REF : 20070803-A

PAGE: 3


PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0603□□□□L□-□□□
		ABC'S ITEM NO.	

. IMPEDANCE CURVE :


■ SF0603001Y

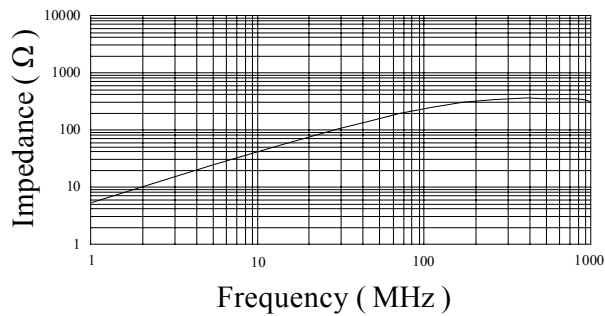


■ SF0603004Y

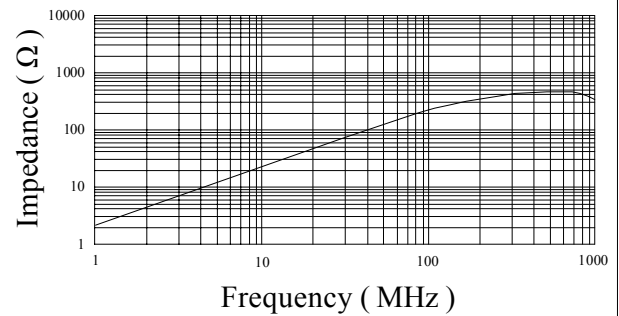


■ SF0603002Y

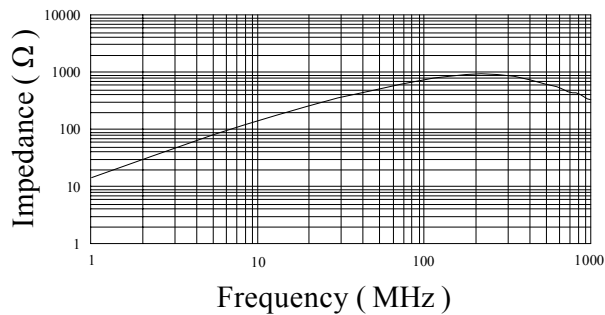


■ SF0603005Y

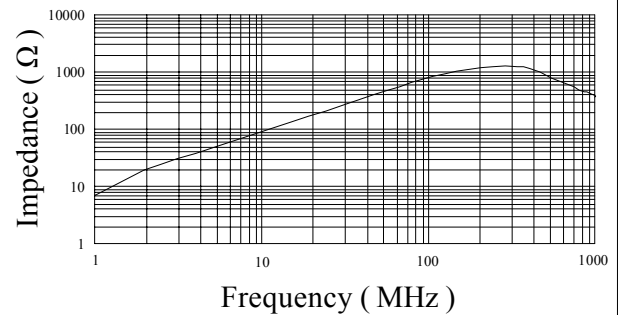


■ SF0603003Y

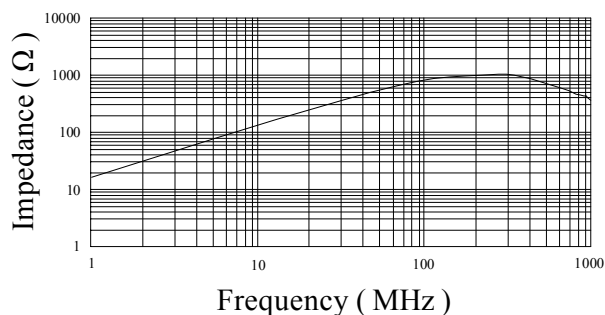

■ SF0603006Y

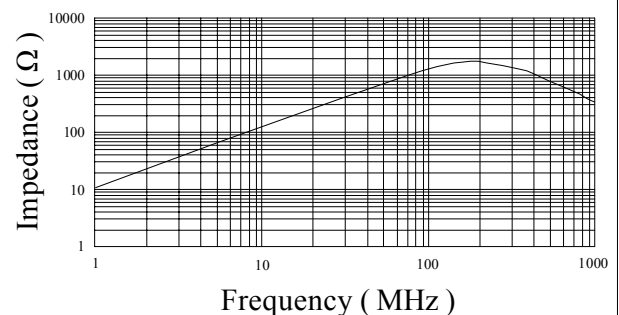

Measuring Circuit :



RF Impedance
Analyzer

AR-001A

SPECIFICATION FOR APPROVAL



REF : 20070803-A

PAGE: 4

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0603□□□□L□-□□□
		ABC'S ITEM NO.	

PACKAGING INFORMATION

(1) Configuration

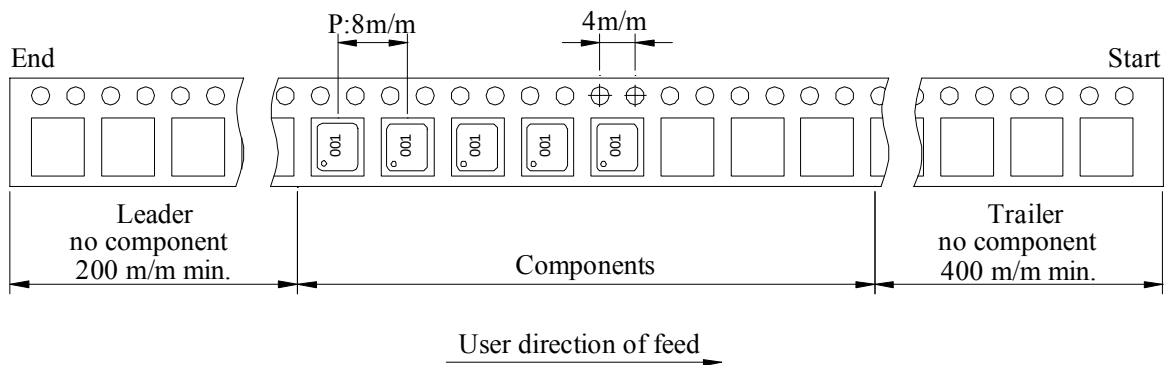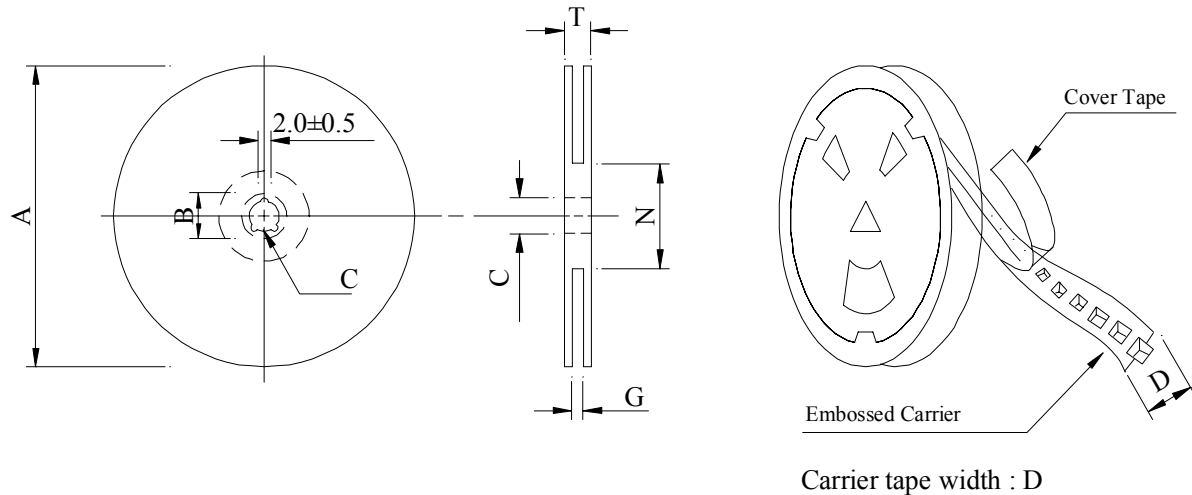

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
07 - 12	178	21±0.8	13	12	14 ⁺⁰	50 ⁻⁰	18.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SF0603	600	200	07 - 12	24,000	8.0	42 x 41 x 24

AR-001A


SPECIFICATION FOR APPROVAL

REF : 20070803-A

PAGE: 5

PROD.	SMD LINE FILTER	ABC'S DWG NO.	SF0603□□□□L□-□□□
NAME		ABC'S ITEM NO.	

. DWGING NUMBER EXPRESSION :

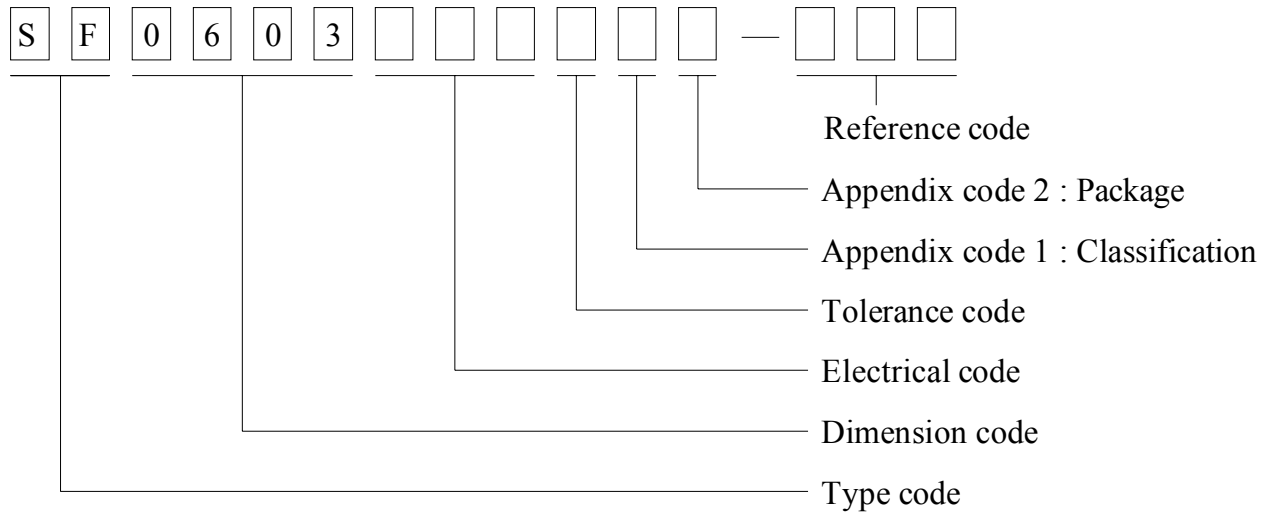

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner Package	Inner Package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel Package)	600 pcs	

AR-001A

SPECIFICATION FOR APPROVAL

REF : 20070803-A

PAGE: 6

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0603□□□□L□-□□□
		ABC'S ITEM NO.	

. RELIABILITY TEST :

Test item	Specification	Test condition
Solderability	More than 90% of the terminal electrode Shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±20%	Room temp. $\xrightarrow{\quad}$ $\frac{-25\pm2}{30 \text{ minutes}}$ Room temp. $\xrightarrow{\quad}$ $\frac{85\pm2}{30 \text{ minutes}}$ Total : 50 cycles
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours
High temp. Resistance test		Temperature : 80±2 Applied current : Per spec. Time : 500 hours

AR-001A

SPECIFICATION FOR APPROVAL

REF : 20070803-A

PAGE: 7

PROD.	SMD LINE FILTER	ABC'S DWG NO.	SF0603□□□□L□-□□□
NAME		ABC'S ITEM NO.	

. UL CARD :

OBMW2

September 8, 2000

Magnet Wire-Component

JUNG SHING WIRE CO LTD

E174837

231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	—	Polyamideimide	—	—	MW81-C	220
CFUEWB	—	Polyurethane	—	—	MW75C	130
EIAIW	—	Polyesterimide	Polyamideimide	—	MW35C	200
EILOCKY	—	Polyesterimide	Polyamide	—	—	180
EILOCKW	—	Polyesterimide	Modified Epoxy	—	—	200
EIW	—	Polyesterimide	—	—	—	220
EIW-2	—	Polyesterimide	—	—	MW74-C	200
FL.EILOCKY	—	Modified Polyester	Polyamide	—	—	155
LSFFW	—	Polyurethane	—	—	MW79-C	155
LSUEW	—	Polyurethane	—	—	—	130
PEW	—	Polyester	—	—	—	155
PEY	—	Polyester	Nylon	—	MW24-C	155
SF.FLW	—	Modified Polyester	—	—	MW26C	155
SF.EIW	—	Polyesterimide	—	—	MW77C	180
SF.BY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.FLY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.BLOCKBS	—	Modified Polyester	Modified Polyamide	—	—	155
SF.EILOCKY#	—	Polyesterimide	Polyamide	—	—	180
SF.EILOCKBS	—	Polyesterimide	Modified Polyamide	—	—	180
SF.BW@	—	Modified Polyester	—	—	MW26C	155
SFFW	—	Polyurethane	—	—	MW79	155

287806002

Page 1 of 2

A not-for-profit organization
dedicated to public safety and
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	—	Polyurethane	Polyamide	—	MW80C	155
UEW-1	—	Polyurethane	—	—	MW2-C	105
UEW-2	—	Polyurethane	—	—	—	130
UEW-4	—	Polyurethane	—	—	MW75C	130
UEY	—	Polyurethane	Nylon	—	MW28-C	130
UEY-2	—	Polyurethane	Polyamide	—	MW28-C	130

@ - May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.
LZ - Signifies magnd wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signi-
fies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks JSW or 榮星電線, material designation or marked designation on packaed or reel, and
Recognized Component Mark.

See General Information Preceding These Recognitions

For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002

Page 2 of 2

OBMW2E174837
September 8, 2000

AR-001A



千如電子集團
ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL

REF : 20070803-A

PAGE: 8

PROD. NAME	SMD LINE FILTER	ABC'S DWG NO.	SF0603□□□□L□-□□□
		ABC'S ITEM NO.	

QMFZ2											
Component-Plastics											
PHILLIPS PETROLEUM CO										E54700 (N)	
PLASTICS TECHNICAL CENTER. BARTLESVILLE OK										(A card)	
OK 74004											
		Min	UL94	Elec	RTI				H	D	
		Thk	Flame		Mech	H	H	V	4	C	
		mm	Class		with	W	A	T	9	T	
Matl Desg	Col				imp	I	I	R	5	I	
Polyphenylene sulfide (PPHS) glass reinforced, designated "RYTON", furnished in the form of pellets											
R-4	NC	0.38	94V-0	50	50						
		0.71	94V-0	200	200	200	4	1			
		1.47	94V-0	220	200	220	0	0			
		1.73	94-5V	220	200	220					
		3.05	94V-0,	220	200	220	0	0	4	7	4
			94-5V								
		6.10	94V-0,	220	200	220	0	0			
			94-5V								
R-7	NC	0.71	94V-0	200	200	200	1	0			
R-7 02	BK	1.47	94V-0	220	220	220	1	0			
R-7 03	TN	3.05	94V-0	220	220	220	1	0	0	5	3
		6.10	94V-0	220	220	220					

AR-001A



千如電子集團
ABC ELECTRONICS GROUP.