



1. CONFIGURATION & DIMENSIONS :

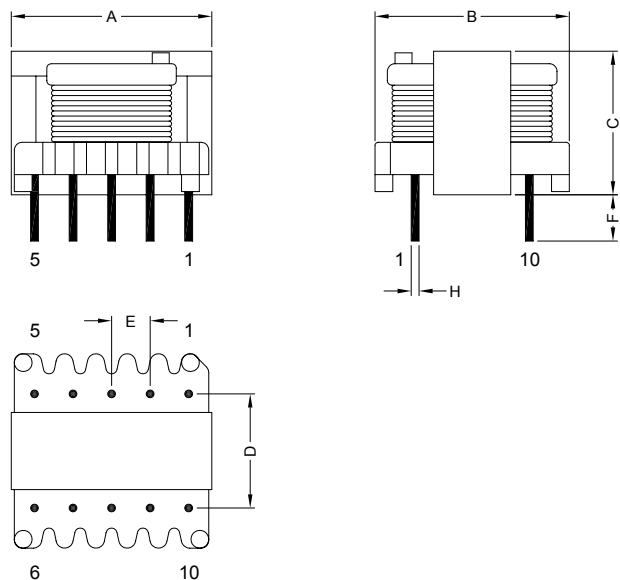

Unit:m/m

A	B	C	D	E	F	H
13.00±1.00	12.50±0.50	9.50±1.00	7.50±0.50	2.50±0.50	3.60±1.00	Ø0.60±0.05

2. SCHEMATIC :

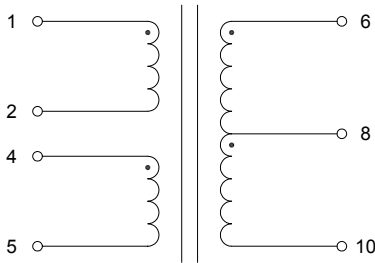

3. SCHEMATIC :

- a) Bobbin : Phenolic
- b) Core : EI12.5
- c) Wire : Polyurethane (UEW)
- d) Tape : Polyester Film
- e) Varnish : Synthite AC-43



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Impedance (Z)	Conditions	Test Frequency	DCR @ 25°C
SEIB2VTF-50724	Z : (1-5) tie: 2.4 = 10KΩ±10%	Load 6-10 = 10KΩ	1KHz 1V	(1-5)tie: 2.4 = 700Ω±10%
	Z : (6-10) tie: 2.4 = 10KΩ±10%	Load 1-5 = 10KΩ	1KHz 1V	(6-10) = 650Ω±10%



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD