



Description

The SE3901 is a green-mode Pulse Width Modulation (PWM) controller. It is specifically designed for low power applications such as 5W-20W Adaptors and Off-line battery Chargers. In these typical applications, the low standby power, space saving, and low cost are all required. SE3901 is a perfect solutions to meet these challenges. The typical standby power is only 0.13Watt.

In normal operation, the SE3901 switches on and off at a fixed switching frequency of 60 kHz. With a current limit capability of about 420mA, the SE3901 can directly drive the emitter of a high voltage NPN transistor. When the output power falls below a given level, the IC enters skip cycle mode to reduce power consumption.

The SE3901 also features Under-Voltage Lockout , Over-Temperature Protection, Over-Current and Short Circuit Protections.

The SE3901 is available in TO-94 Packages.


Features

- Internal Zener Diode
- Low Cost Emitter Drive PWM Solution
- 0.13W Standby Power
- Current Mode Operation
- Short Circuit Protection
- Over-Current Protection
- Over-Temperature Protection
- Under-Voltage Lockout with Auto-restart
- Available in TO-94 Packages
- RoHS Compliant and 100% Lead (Pb)-Free

Application

- Battery Chargers
- Universal Off-line Power Supplies
- Power Adaptors
- LED 3W-9W Lighting Solutions with SE1051

Pin Configuration

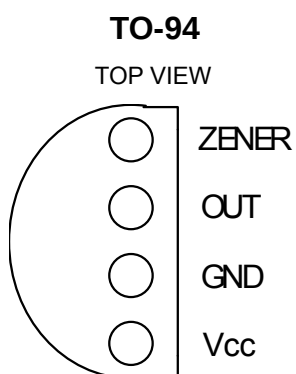

Pin Description

Name	Pin#	Function
VCC	1	The power supply of the IC, and is generally connected to opto-coupler's emitter
GND	2	Supply ground
OUT	3	The output pin, connected to the emitter of NPN transistor.
ZENER	4	The output pin, connected to Internal ZENER



Absolute Maximum Rating

Symbol	Parameter	Maximum	Units
VCC	DC Supply Voltage	-0.3 ~ 6	V
OUT	Voltage at OUT	-0.3~ 18	V
θ_{JA}	Thermal Resistance Junction to Ambient (TO92)	220	°C/W
T _J	Operating Junction Temperature Range	0 to 125	°C
T _{STG}	Storage Temperature Range	-40 to 150	°C
T _{LEAD}	Lead Temperature (Soldering 10 Sec)	260	°C

Electrical Characteristics

(V_{CC}=4V, T_J=25°C, unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
UVLO SECTION						
Start-up Voltage	V _{TH} (ST)		5.00	5.25	5.5	V
Minimal Operating Voltage	V _{OPR} (Min)		3.4	3.65	3.9	V
THERMAL PROTECT						
Thermal Shutdown	T _{SD}			150		°C
Thermal Hysteresis	T _{Hy}			20		°C
STANDBY CURRENT SECTION						
Start-up Current	I _{ST}	V _{CC} =4V		0.22	0.4	mA
Operating Current	I _{CC(OPR)}			0.45	0.7	mA
VCC Zener Voltage	V _Z	I _{CC} =10mA	6	6.3		V
Dynamic Impedance	R _{VCC}	V _{CC} =3.8 to 4.8V		9		K Ω
INTERNAL OSCILLATOR						
Switching Frequency	f		50	60	75	KHz
DRIVE OUTPUT SECTION						
OUT Start-up Voltage	V _{ST}			8.5	11	V
Short Circuit Threshold Voltage	V _{SC}			6		V
Maximum Duty Cycle	D _{max}	V _{OPR} (Min)+0.2		75		%
Minimum Duty Cycle		V _{CC} =V _{th} (st)-0.2		3		%
Driver OUT On-Resistance	R _{OUT}	I _{OUT} =0.06A		3		Ω
Switch Off Current		Driver off, V _{out} =10V		20	40	uA
Effective Current Limit	I _{LIM}	V _{CC} = V _{OPR} +0.1V	420			mA
OUT Current Coefficient	G _A			-0.3		A/V



Typical Application

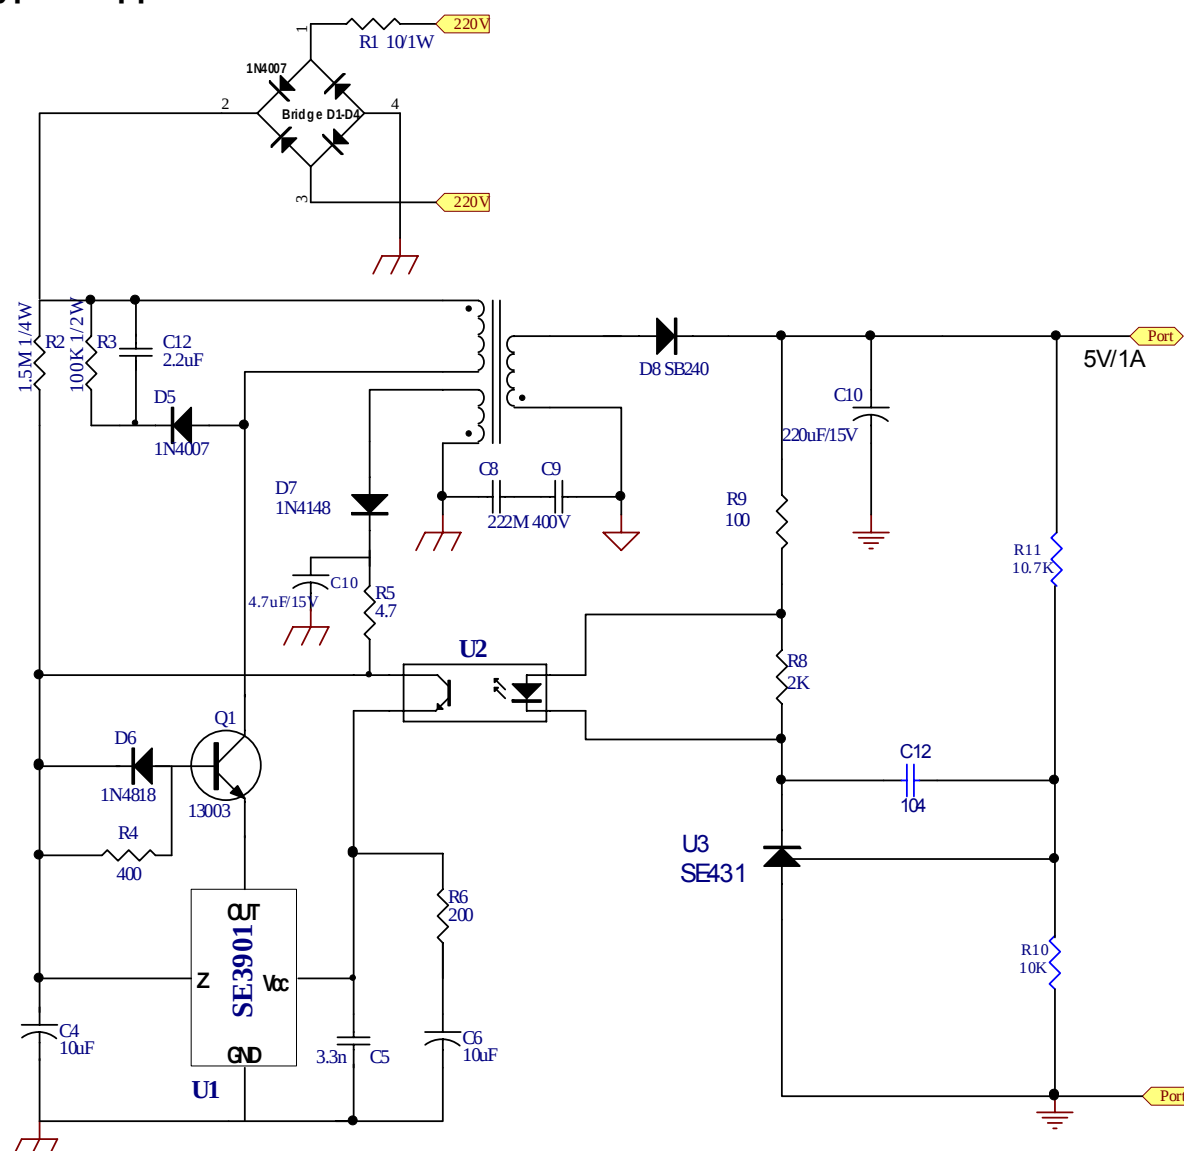


Fig.1 5V/1A Mobile Phone USB Charger Using SE3901(TO94) and SE431.

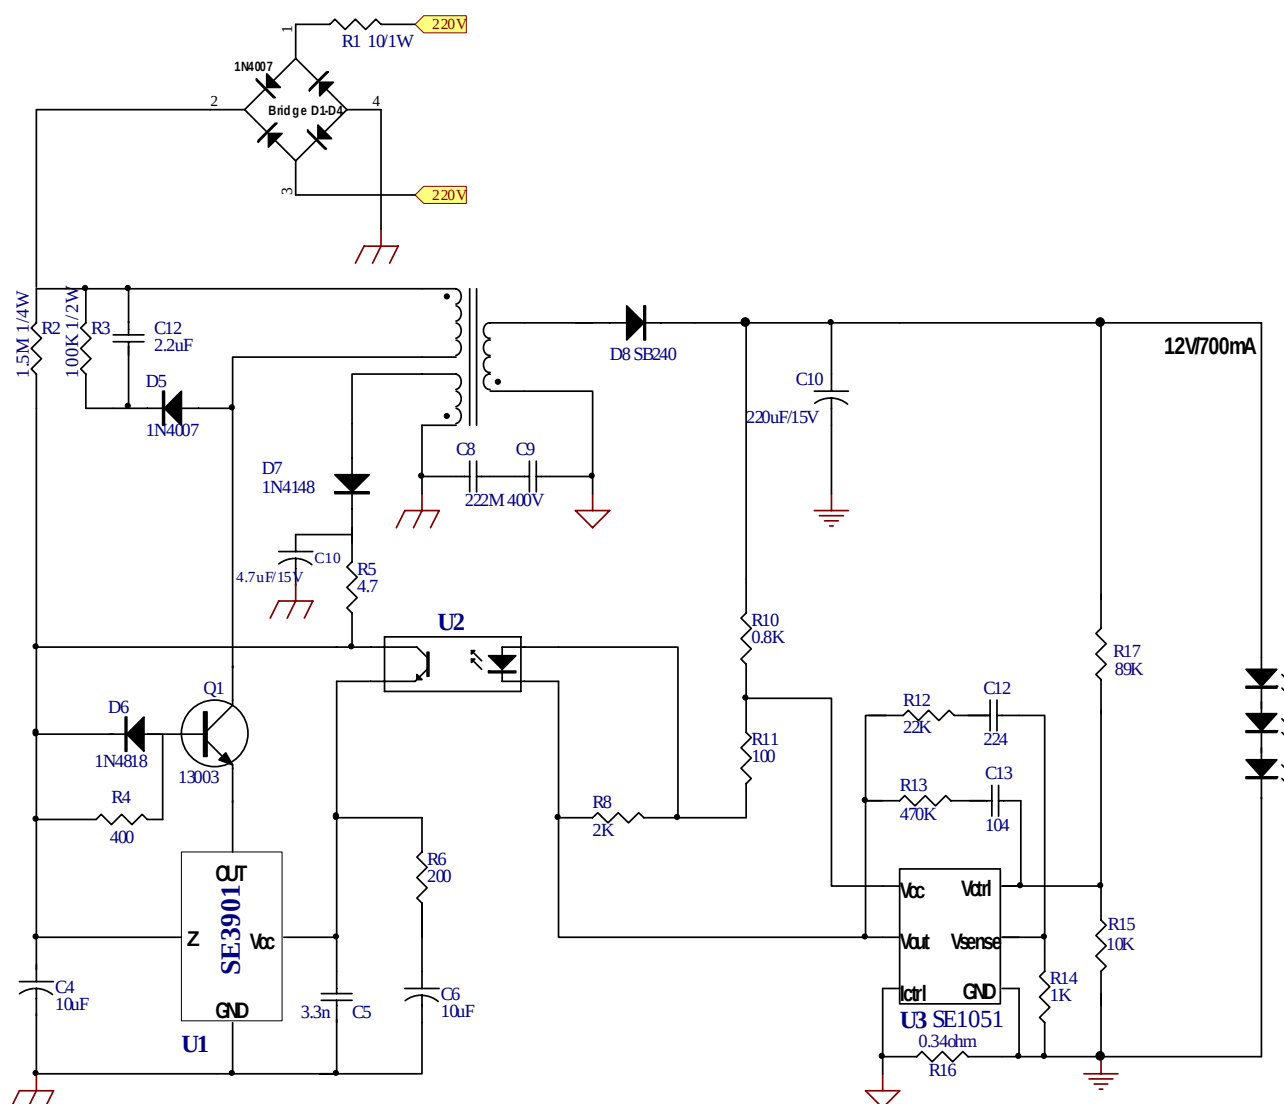



Fig.2 12V/700mA Lighting 9W LED Solution Using SE3901(TO94) and SE1051.



Preliminary and all contents are subject to change without prior notice.
© Seaward Electronics, Inc., 2008. • www.seawardinc.com • Page 5




OUTLINE DRAWING T094

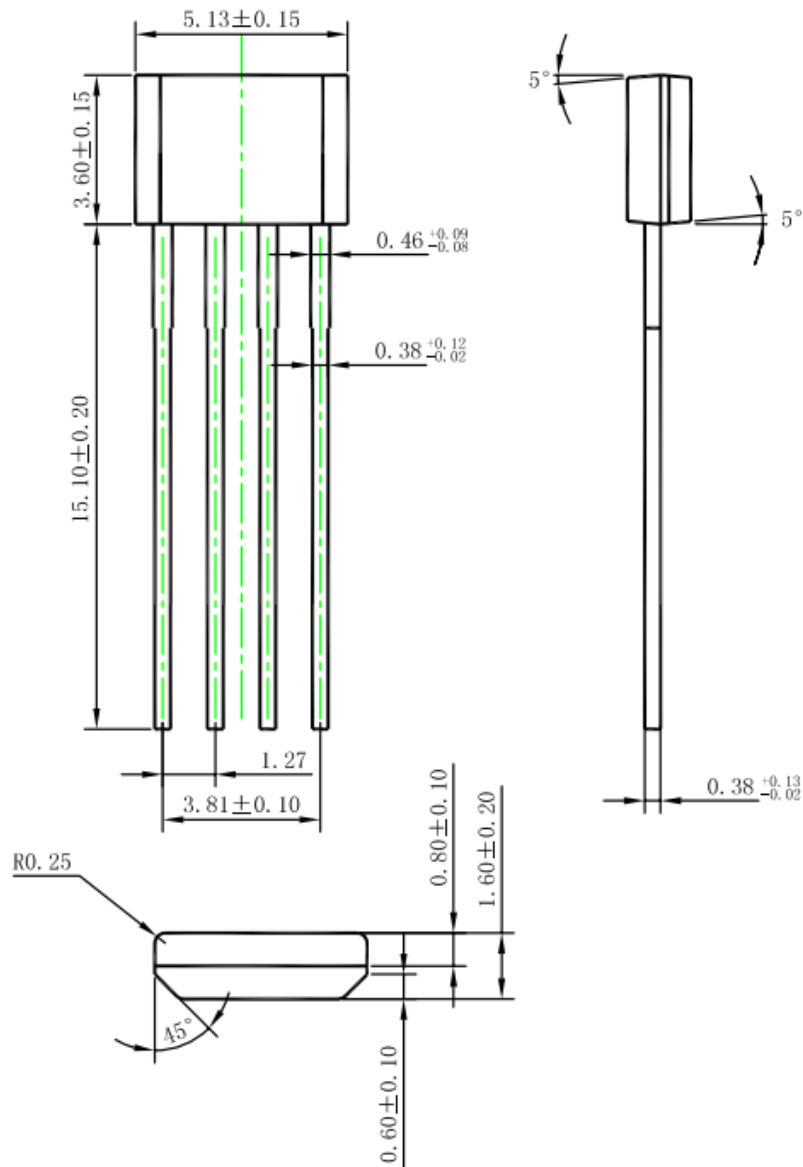





OUTLINE DRAWING SOT143

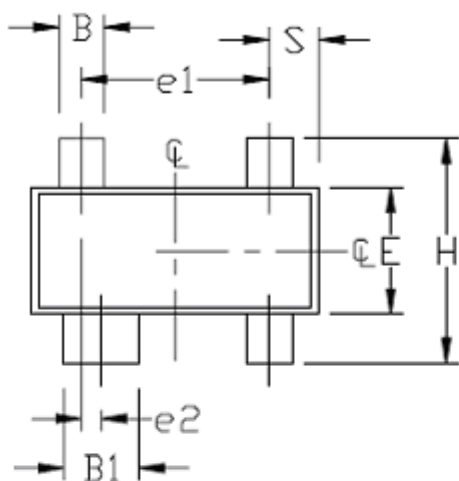

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.031	0.047	0.787	1.194
A1	0.001	0.005	0.025	0.127
B	0.014	0.022	0.356	0.559
B1	0.030	0.038	0.762	0.965
C	0.0034	0.006	0.086	0.152
D	0.105	0.120	2.667	3.048
E	0.047	0.055	1.194	1.397
e1	0.071	0.079	1.803	2.007
e2	0.008	BSC	0.200	BSC
H	0.082	0.098	2.083	2.489
I	0.004	0.012	0.102	0.305
S	0.018	0.024	0.450	0.600
α	0°	8°	0°	8°

NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
3. CONTROLLING DIMENSION: MILLIMETER

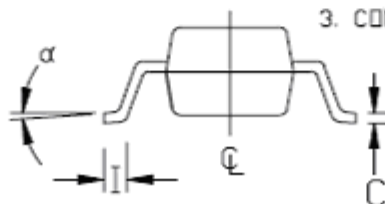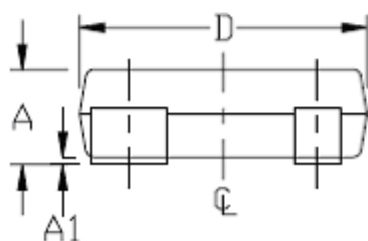



Customer Support

Seaward Electronics Incorporated – China

Section B, 2nd Floor, ShangDi Scientific Office Complex, #22 XinXi Road

Haidian District, Beijing 100085, China

Tel: 86-10-8289-5700/01/05

Fax: 86-10-8289-5706

Seaward Electronics Corporation – Taiwan

2F, #181, Sec. 3, Minguang East Rd,

Taipei, Taiwan R.O.C

Tel: 886-2-2712-0307

Fax: 886-2-2712-0191

Seaward Electronics Incorporated – North America

1512 Centre Pointe Dr.

Milpitas, CA95035, USA

Tel: 1-408-821-6600

Last Updated - 1/20/2009