

**SOLID STATE DEVICES, INC.**

14830 Valley View Blvd * La Mirada, Ca 90638

Phone: (562) 404-7855 * Fax: (562) 404-1773


ssdi@ssdi-power.com * www.ssdi-power.com

Designer's Data Sheet**FEATURES:**

- Ultra Fast Recovery: 90 nsec Maximum
- PIV to 6000 Volts
- Hermetically Sealed Axial and Surface Mount Package
- Void-Free Construction
- Metallurgically Bonded
- 175°C Maximum Operating Temperature
- Replacement for 1N6512 thru 1N6518 and 1N6520 thru 1N6526 in Many Applications.
- TX, TXV, and Space Level Screening Available
- Available in Fast and Hyper Fast versions. Contact Factory.

**SDH20UF & UFSMS
thru
SDH60UF & UFSMS**

**1 - 1.5 AMPS
2000 - 6000 VOLTS
ULTRA FAST RECOVERY
HIGH VOLTAGE
RECTIFIER**

AXIAL**SURFACE MOUNT
(SMS)****ELECTRICAL CHARACTERISTICS**

Part Number	Peak Inverse Voltage	Average Rectified Current		Maximum Reverse Current		Maximum Forward Voltage	Maximum Surge Current (1 Cycle)	Maximum Reverse Recovery Time	Maximum Junction Capacitance	Typical Thermal Impedance	
Symbol	PIV	I_0		I_R @ PIV		$V_F^{2/}$	I_{FSM}	$t_{RR}^{5/}$	C_J	θ_{JE}	θ_{JL}
Units	Volts	A		μA		Volts	Amps	nsec	pF	°C/W	
Conditions		25°C	100°C	25°C	100°C	25°C	25°C	25°C	$V_R = 100V$ $f_T = 1MHz$		$L = 1/8"$
SDH20UF	2000	1.5	1.0	1.0	25	7.5	60	90	10	4	8
SDH25UF	2500	1.5	1.0	1.0	25	7.5	60	90	10	4	8
SDH30UF	3000	1.5	1.0	1.0	25	7.5	60	90	10	4	8
SDH40UF	4000	1.0	0.5	1.0	25	10.5	40	90	8	4	8
SDH50UF	5000	1.0	0.5	1.0	25	10.5	40	90	8	4	8
SDH60UF	6000	1.0	0.5	1.0	25	10.5	40	90	8	4	8

NOTES:

1. Operating and testing over 10,000 V/inch may require encapsulation or immersion in suitable dielectric material.
2. $I_F = I_0$; Maximum forward voltage measured with instantaneous forward pulse of 300 μ sec minimum.
3. Maximum lead/end tab temperature for soldering is 250°C, 3/8" from case for 5 sec maximum.
4. Operating and Storage temperature: -65 to +175°C.
5. Reverse Recovery Test Conditions: $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$, $T_A = 25°C$.

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET # : RC0059C

**SDH20UF & UFSMS
thru
SDH60UF & UFSMS**




SOLID STATE DEVICES, INC.

14830 Valley View Blvd * La Mirada, Ca 90638

Phone: (562) 404-7855 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com


PACKAGE OUTLINE: AXIAL RECTIFIER

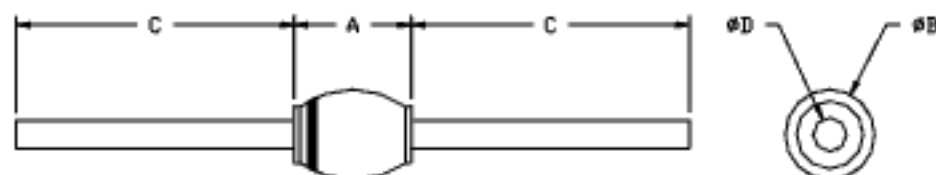

DIMENSIONS

DIM	MIN.	MAX.
A	0.230"	0.270"
B	--	0.180"
C	1.00"	--
D	0.047"	0.053"

CASE OUTLINE: SURFACE MOUNT SQUARE TAB (SMS)

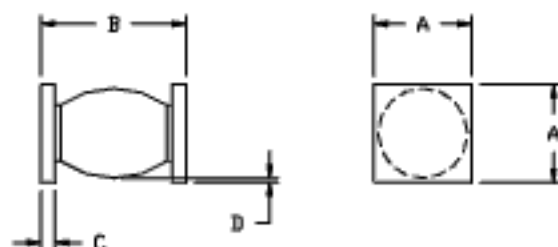

DIMENSIONS

DIM	MIN.	MAX.
A	0.195"	0.205"
B	0.280"	0.320"
C	0.020"	0.030"
D	0.002"	--

NOTES:

Consult manufacturing for operating curves.