

SD Card Adapter (for microSD™ Card)

SCHC Series



High contact reliability and locking mechanism work effectively to prevent unintentional ejection of cards.



Features

- General SD card hosts can be used by inserting miniSD™ card into the adaptor.
- Unique half-lock structure stops media from flying out during ejection.

Applications

- For digital still cameras, digital camcorders, mobile phones, PCs and personal digital assistants

For
SD Memory
Card

For
microSD™
Card

For
SIM Card
8pins

For
W-SIM

For
Memory
Stick Micro™

For
Memory
Stick™

Combine Type

For
Compact
Flash™

For PC cards
supporting
CardBus

For
Express
Card™

For CMOS
Camera Module

Typical Specifications

Items		Specifications
Structure	Applicable media	microSD™ Card
	Mounting type	_____
	Mounting style	_____
	Media ejection structure	Manual insertion/removal
Performance	Operating temperature range	−25℃ to +85℃
	Voltage proof	500V AC 1minute
	Insulation resistance (Initial)	1,000MΩ min.
	Contact resistance (Initial)	100mΩ max.
	Insertion and removal cycle	10,000cycles


Product Line

Media ejection structure	Packing system	Product No.
Manual insertion/removal	Tray	SCHC1A0200

■ Dimensions

Unit:mm

Style

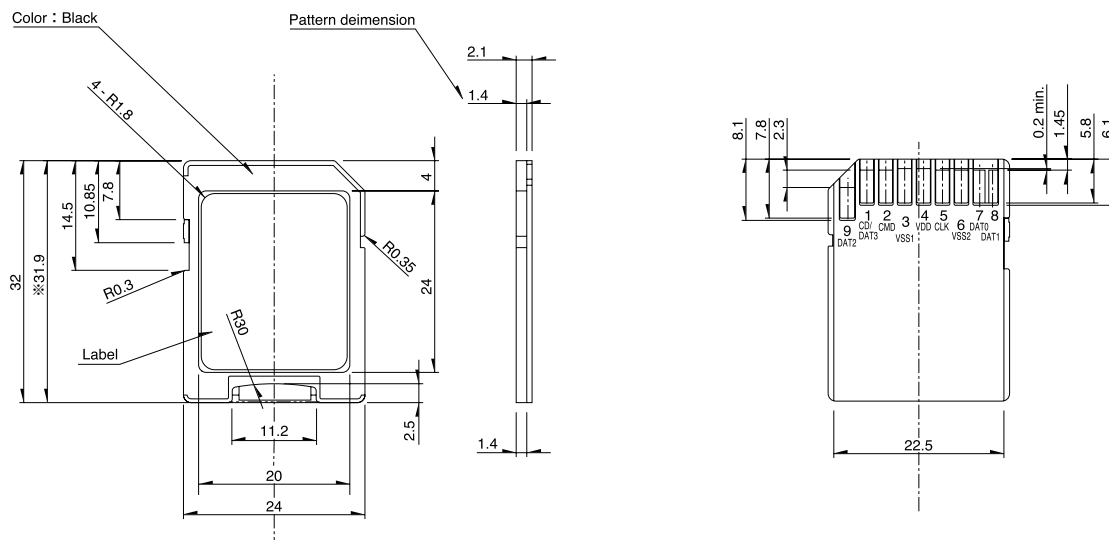

Note

※ Above dimensions apply when a microSD™ card is fully inserted into the adapter case.
Label indications will be customized independently. Samples will be delivered without a label.

Cautions for using this product

1. This product has been designed and manufactured for use in ordinary electronic equipment, such as AV equipment, electric home appliances, office machines and communication equipment. In case of using the products for highly sensitive applications such as medical, aviation, aerospace and security, the set makers shall require to include measures necessary to meet product safety requirements of such specific applications. Such measure may include additional protection circuits and redundant circuits, for example.
2. To prevent contact failures caused by sulfuration or oxidation on the contact and terminal or deterioration of solderability caused by film forming, please follow the instructions given below.
 - (1) Do not store the product in locations with high temperature or high humidity. Keep it in an atmosphere free from corrosive gases including sulphurous or chlorinate gas. Do not stack.
 - (2) Store the adapter unopened at room temperature and Low humidity. Use the product preferably within 3 months after delivery or within 6 months at the latest.
 - (3) To store the product after opening the package, keep it in a sealed polyethylene bag. Store in a dark, cool place, out of direct sunlight. Use the product as soon as possible.