


S2A thru S2M SERIES

SURFACE MOUNT RECTIFIER



**CHENG-YI
ELECTRONIC**

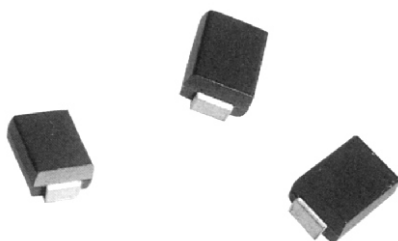

FEATURES


- For surface mounted applications
- High temperature metallurgically bonded-no compression contacts as found in other diode-constructed rectifiers
- Glass passivated junction
- Built-in strain relief
- Easy pick and place
- Plastic package has Underwrites Laboratory Flamability Classification 94V-O
- Complete device submersible temperature of 260°C for 10 seconds solder bath

MECHANICAL DATA

- Case: JEDEC DO-214AA molded plastic
- Terminals: Solder plated solderable per MIL-STD-750, Method 2026
- Polarity: Indicated by cathode band
- Standard Packaging: 12mm tape (EIA STD EIA-481)
- Weight: 0.003 ounce, 0.093 gram

VOLTAGE RANGE 50 TO 1000 Volts
CURRENT 2.0 Amperes

SMB/DO-214AA

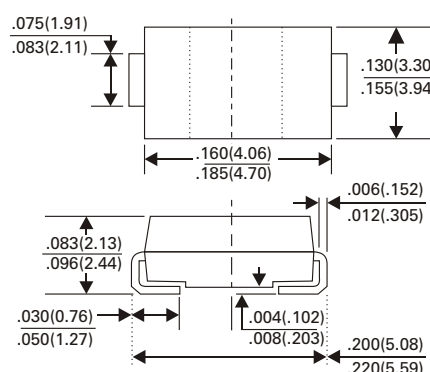

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

RATINGS	SYMBOL	S2A	S2B	S2D	S2G	S2J	S2K	S2M	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, at $T_L = 110^\circ\text{C}$	$I_{(AV)}$	2.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	60.0							Amps
Maximum Instantaneous Forward Voltage at 2.0A	V_F	1.10							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	5.0 200							μA
		@ $T_A = 25^\circ\text{C}$ @ $T_A = 125^\circ\text{C}$							
Maximum Reverse Recovery Time (Note 1)	T_{RR}	2.5							μs
Typical Junction Capacitance (Note 2)	C_J	30.0							pF
Maximum Thermal Resistance (Note 3)	$R_{\theta JL}$	16							$^\circ\text{C} / \text{W}$
Operating and Storage Temperature Range	T_J T_{STG}	-50 to +150							$^\circ\text{C}$

Notes : 1. Reverse Recovery Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$
2. Measured at 1 MHz and Applied $V_r = 4.0$ volts
3. 8.0mm²(0.13mm thick) land areas

S2A thru S2M SERIES

SURFACE MOUNT RECTIFIER



**CHENG-YI
ELECTRONIC**

RATING AND CHARACTERISTICS CURVES S2A THRU S2M

Fig.1 - FORWARD CURRENT DERATING CURVE

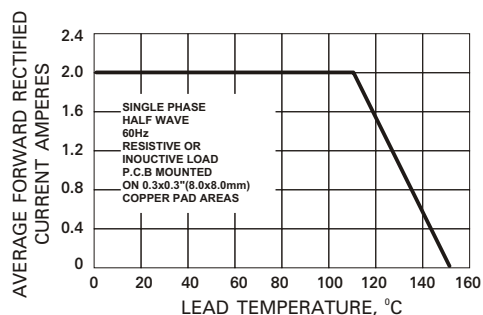


Fig.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

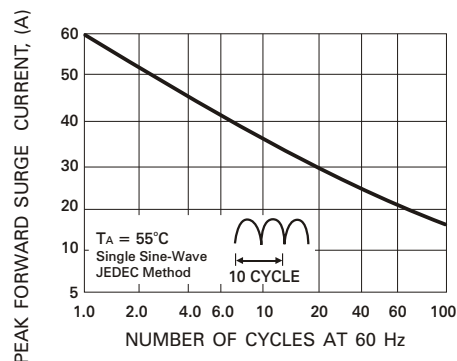


Fig.3 - TYPICAL REVERSE CHARACTERISTICS

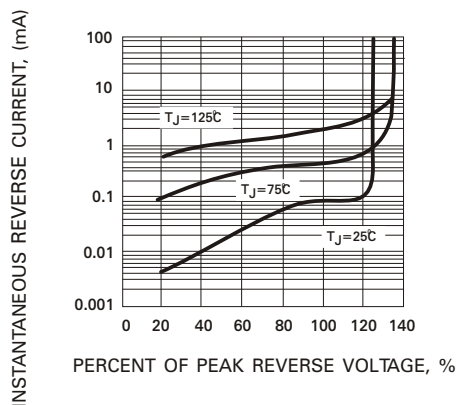


Fig.4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

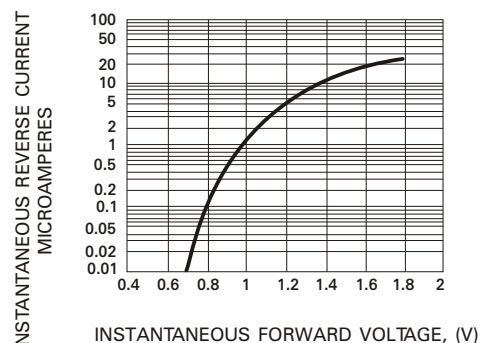


Fig.5 - TRANSIENT THERMAL IMPEDANCE

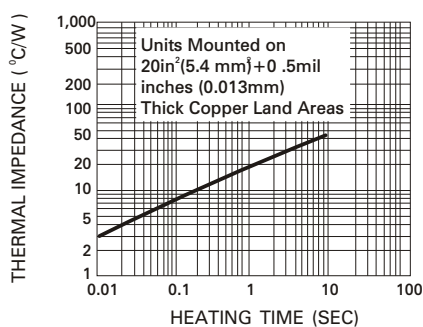


Fig.6 - TYPICAL JUNCTION CAPACITANCE

