



CHENMKO ENTERPRISE CO.,LTD

Lead free devices

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 - 40 Volts CURRENT 10 Amperes

S10P20PT

THRU

S10P40PT

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Metal Silicon junction, majority carrier conduction
- * Low power loss, high efficiency
- * High current capability, low forward voltage drop
- * Guardring for overvoltage protection
- * For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- * High temperature soldering in accordance with CECC 802 / Reflow guaranteed

MECHANICAL DATA

Case: JEDEC DPAK molded plastic

Terminals: Lead solderable per MIL-STD-750, Method 2026

Polarity: As marked


Weight: 1.7 grams (Approximately)



DPAK

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

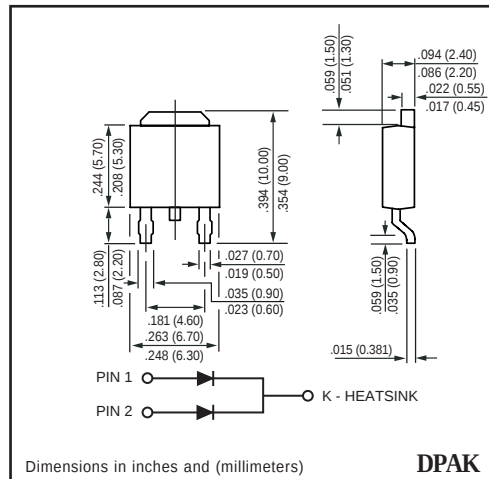

MAXIMUM RATINGS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

RATINGS	SYMBOL	S10P20PT	S10P30PT	S10P40PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	Volts
Maximum Average Forward Rectified Current	I_O	10.0			Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150			Amps
Typical thermal resistance per leg (NOTE 1)	$R_{\theta JC}$	3.0			$^\circ\text{C} / \text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-40 to +125			$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	S10P20PT	S10P30PT	S10P40PT	UNITS
Maximum Instantaneous Forward Voltage at 5.0 A DC	V_F	0.55			Volts
Maximum instantaneous reverse current at $T_C = 25^\circ\text{C}$	I_R	1.0			mAmps
rated DC blocking voltage per leg (NOTE 2) $T_C = 100^\circ\text{C}$		50			mAmps

NOTES : 1. Thermal resistance from junction to case per leg
2. Pulse test : 300 us pulse width, 1% duty cycle

2002-5

RATING CHARACTERISTIC CURVES (S10P20PT THRU S10P40PT)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

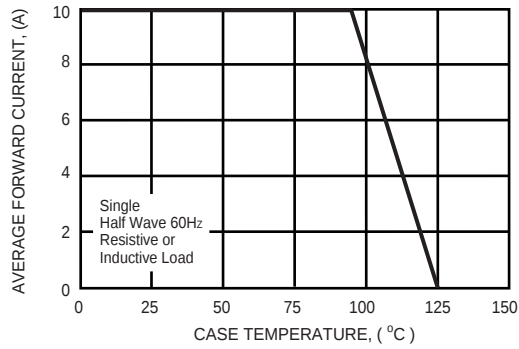


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

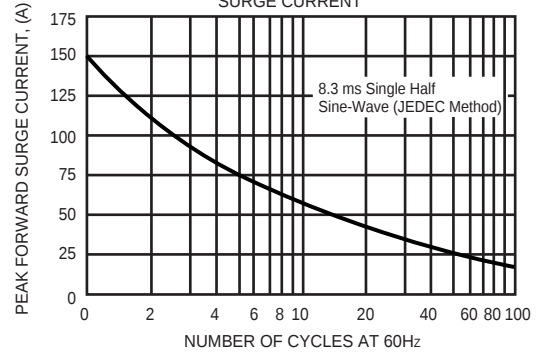


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

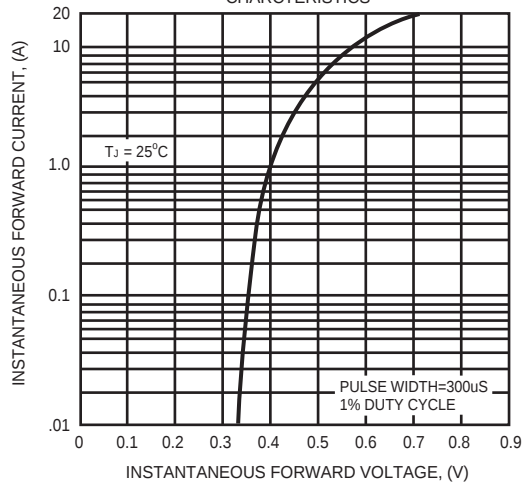


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

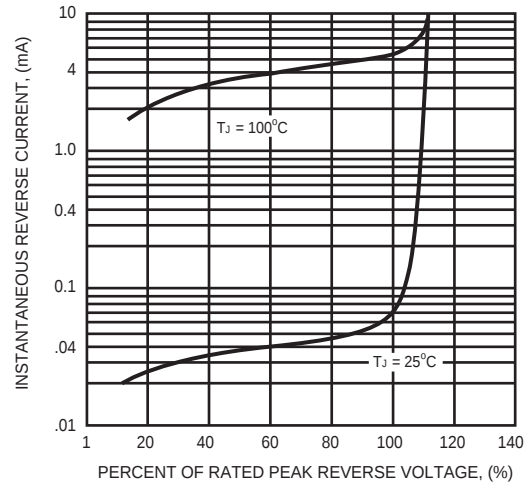


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

