

Slide Potentiometer Slim Slide™ (Low-profile)


RS □ □ M Series



Available in 4.5mm-height board-in type.

Rotary
Potentiometers

Slide
Potentiometers

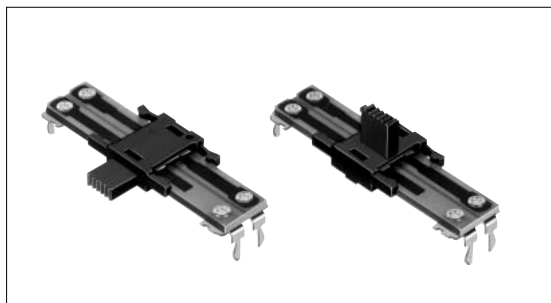

Typical Specifications

Items	Specifications
Total resistance tolerance	± 20%
Maximum operating voltage	50V AC, 50V DC
Operating force	0.15 to 0.8N
Operating life	10,000cycles
Operating temperature range	- 10 to + 70

Product Line

Product Line											
Number of resistor elements	Direction of lever	Travel (mm)	Lever types	Length of lever (mm)	Total resistance (kΩ)	Resistance taper	Center detent	Terminal	Minimum packing unit(pcs.)	Products No.	Drawing No.
Single-unit	Vertical	15	J	5	10	1B	Without	Board in	1,000	RS15M111J002	1
		5			RS20M111J000					2	
		20			C		100			RS20M111C000	3
			J	10			RS20M113JA03			2	
	Horizontal	15	J	5	10		RS15M11AJ004			4	
				C			10			RS15M11AC006	5
			J	5	50		RS15M11AJ00L			4	
					C		10			RS15M11AC003	5
			10	J	5		10			RS15M11AJ00V	4
							5			RS15M11AJ00R	
		20	J	5	5		RS20M11AJ00C			6	
					50		RS20M11AJ00G				
					100		RS20M11AJ00T				

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions
1		
2		

Note

Products other than those listed in above products are also available. Please contact us for details.

Refer to **P.418** for product varieties.
Refer to **P.418** for details of lever types.

Dimensions

Unit:mm

Rotary
Potentiometers
Slide
Potentiometers

General-use
Mixer

No.	Style	PC board mounting hole dimensions
3		
4	L₁ 5 10	
5	L₁ 5 10	
6		

The length of the operating part(L₁)can be customized. Refer to P.418 for details.

Product Varieties

In addition to the recommended products, the following specifications can also be accommodated.

Rotary
Potentiometers

Slide
Potentiometers

Travel Distance Variety

Travel (mm)	15	20
--------------	----	----

Total Resistance Variety

Total resistance (kΩ)	5	10	20	50	100	200	250
-------------------------	---	----	----	----	-----	-----	-----

Resistance Taper

Resistance taper	15A	1B	3B
------------------	-----	----	----

General-use

Mixer

Note


Tapped types are not available.

Lever Types

Unit:mm

Configuration code	C		J	
Dimensions				
Length L1	5		5	10

Terminal layout/Circuit diagram(Viewed from Mounting Side)

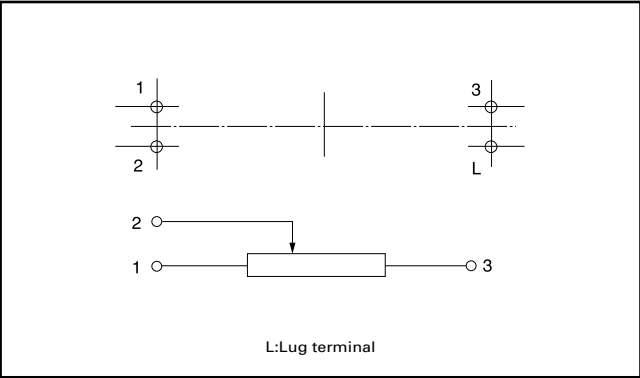

Notes

1. marked are specifications recommended by ALPS.
2. Products other than those listed in the above list are also available. Please contact us for details.

Refer to P.419, 502 for resistance taper.

Orders Other Than Recommended Products

When ordering product varieties that are not listed in the Product Line, please specify by referring to the below example.

Sample Part Number

R	S	1	5	M	1	1	1	-	C	1	0	-	B	1	0	3
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Travel(mm)

15, 20

Operating direction, Center detent

Code	Operating direction	Center detent
1	Vertical	Board in
3		without
A	Horizontal	Board in
C		with

Shaft types

Code
C
J


Operating length

Code	length(mm)
05	5
10	10

Resistance taper

Code	Resistance taper
A	15A
B	1B
V	3B

B: For tone & general
V: For vol.

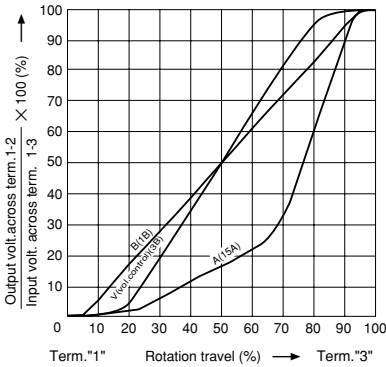

Total resistance

Code	Total resistance (kΩ)	Code	Total resistance (kΩ)
502	5	104	100
103	10	204	200
203	20	254	250
503	50		

Note

marked are specifications recommended by ALPS.

Rotary
Potentiometers

Slide
Potentiometers

General-use

Mixer

List of Varieties

Type		Super Slide™		Slim Slide™ (Slim4)				Slim Slide™ (Low-Profile)	
		RS □ □ 11 □		RS □ □ H1 □				RS □ □ M11	
photo									
Travel(mm)		15(RS15111) 20(RS20111) 30(RS30111) 45(RS45111) 60(RS6011Y)	20(RS20112) 30(RS30112) 45(RS45112) 60(RS60112)	15(RS15H111) 15(RS15H113) 20(RS20H111) 20(RS20H113) 30(RS30H111)	15(RS15H121) 20(RS20H123) 30(RS30H121)	15(RS15H11A) 20(RS20H11A) 20(RS20H11C) 30(RS30H11A)	15(RS15H12A) 20(RS20H12A) 30(RS30H12A)	15(RS15M111) 20(RS20M111) 20(RS20M113)	15(RS15M11A) 20(RS20M11A)
Number of resistor elements		Single-unit	Dual-unit	Single-unit	Dual-unit	Single-unit	Dual-unit	Single-unit	
Direction of lever		Vertical				Horizontal		Vertical	Horizontal
Electrical Performance	Total resistance(kΩ)	10, 20, 50, 100, 200		5, 10, 20, 50, 100 200, 250					
	Resistance taper	15A, 1B, 4B, 10A, 3B, 15C		15A, 1B, 3B					
Mechanical Performance	Operating force	0.3 to 2.5N		0.2 to 1.1N				0.15 to 0.8N	
	Stopper strength	50N		30N					
	Lever push-pull strength			30N				20N	
	Lever wobble(mm) Both sides	$\frac{2(2 \times L)}{20}$		1.6 max.					
	Detent slip-out force	Operating force+(0.2 to 2N)		Operating force+(0.05 to 0.8N)				With detent feeling	
	Lever deviation(mm) One side	0.5 max.							
Solder heat resistance	Manual soldering	350 max. 3s max.							
	Dip soldering	260 max. 5s max.							
Environmental Performance	Cold	- 30 ± 2 for 96h							
	Dry heat	70 ± 2 for 96h						70 ± 2 for 240h	
	Damp heat	40 ± 2 , 90 to 95%RH for 96h							
Page		402		410				416	

Rotary Potentiometers

Slide Potentiometers

General-use

Mixer

- Slide Potentiometers Cautions420, 421

Notes

- "L" in the "Lever Wobble" column of the above table indicates the length of lever.
- Products other than those listed in the above list are also available. Please contact us for details.
- The resistance taper specification in () are individually defined.
- 「RS□□」 □□ indicates travel.