

GPP1A THRU GPP1M

GLASS PASSIVATED JUNCTION RECTIFIER

VOLTAGE: 50 TO 1000V

CURRENT: 1.0A




FEATURE

Molded case feature for auto insertion
High current capability
Low leakage current
High surge capability
High temperature soldering guaranteed
250°C /10sec/0.375" lead length at 5 lbs tension
Glass Passivated chip

MECHANICAL DATA

Terminal: Plated axial leads solderable per
MIL-STD 202E, method 208C
Case: Molded with UL-94 Class V-0 recognized Flame
Retardant Epoxy
Polarity: color band denotes cathode
Mounting position: any

DO - 41\DO - 204AL

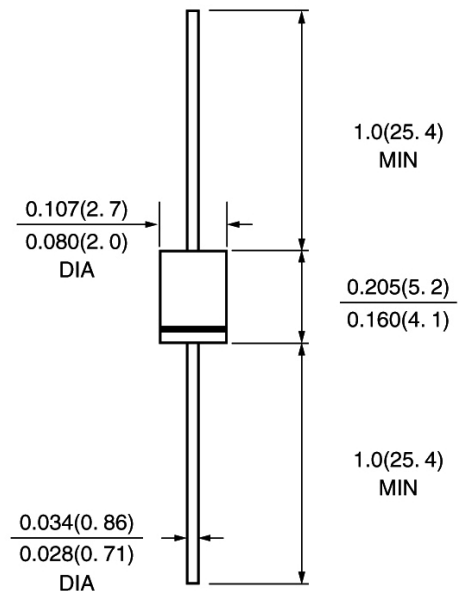

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated,
for capacitive load, derate current by 20%)

	SYMBOL	GPP 1A	GPP 1B	GPP 1D	GPP 1G	GPP 1J	GPP 1K	GPP 1M	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{rms}	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V _{dc}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 3/8" lead length at T _a =75°C	I _{f(av)}	1.0							A
Peak Forward Surge Current 8.3ms single Half sine-wave superimposed on rated load	I _{fsm}	30.0							A
Maximum Instantaneous Forward Voltage at rated forward current	V _f	1.1							V
Maximum full load reverse current full cycle at T _L =75°C	I _{r(av)}	30.0							μA
Maximum DC Reverse Current at rated DC blocking voltage Ta =25°C Ta =100°C	I _r	5.0 50.0							μA μA
Typical Junction Capacitance (Note 1)	C _j	15.0							pF
Operating Temperature (Note 2)	R(ja)	50.0							°C /W
Storage and Operation Junction Temperature	T _{stg} , T _j	-55 to +150							°C

Note:

1. Measured at 1.0 MHz and applied voltage of 4.0Vdc
2. Thermal Resistance from Junction to Ambient at 0.375" lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES GPP1A THRU GPP1M

1

FIG. 1 - FORWARD CURRENT DERATING CURVE

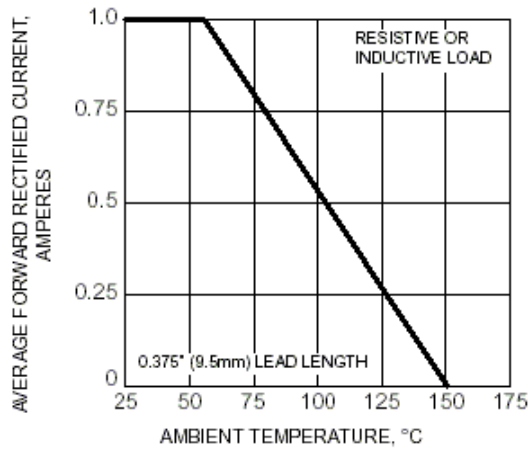


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

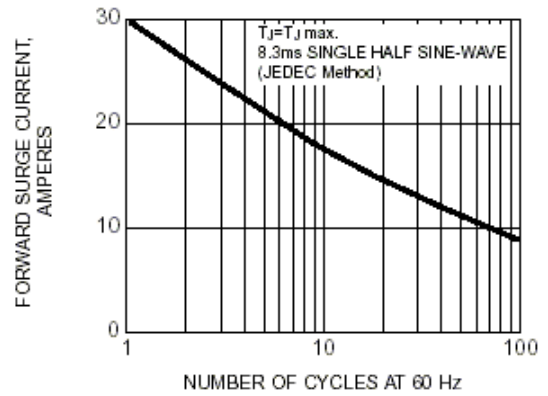


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

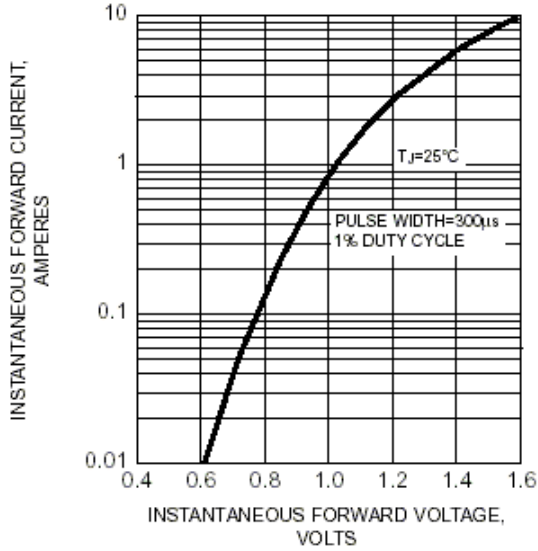


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

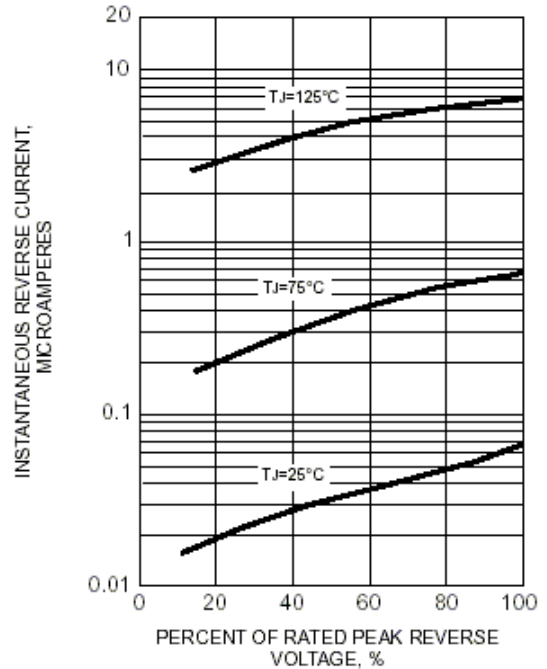


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

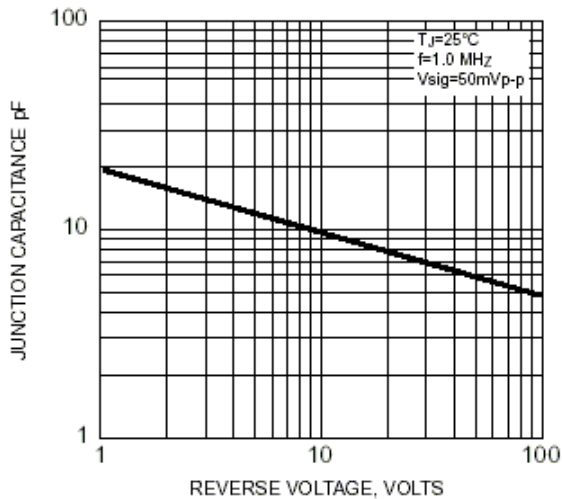


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

