



FEATURES

- 100 WATTS MAXIMUM OUTPUT POWER
- SINGLE OUTPUT UP TO 30A
- COMPACT 2.28 X 1.45 X 0.50 INCH PACKAGE
- HIGH EFFICIENCY UP TO 90%
- 2:1 WIDE INPUT VOLTAGE RANGE
- FIXED SWITCHING FREQUENCY
- INDUSTRY STANDARD FOOTPRINT
- NO MINIMUM LOAD
- ADJUSTABLE OUTPUT VOLTAGE
- UNDER-VOLTAGE LOCKOUT
- INPUT TO OUTPUT ISOLATION (BASIC INSULATION)
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Distributed Power Architectures
Semiconductor Equipment

OPTIONS

Positive logic Remote on/off, Pin length

DESCRIPTION

QEB100 single output DC/DC converters provide up to 100 watts of output power in an industry standard quarter-brick package and footprint. These units are specifically designed to meet the power needs of low-voltage silicon. All models feature a wide input range, trimmable output voltage and a 30A current rating.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power		100 Watts, max.
Voltage accuracy	Full load and Normal Vin	± 1.5%
Minimum load		0%
Voltage adjustability	(Note 5)	+ 10% , -20%
Line regulation	LL to HL at Full Load	±0.2%
Load regulation	No load to Full Load	See table
Remote Sense	(Note 5)	10% of Vout
Ripple and noise	20MHz bandwidth (Measured with a 1µF M/C and a 10µFT/C)	See table
Temperature coefficient		±0.02% / °C, max.
Transient response recovery time	25% load step change	200µS
Over voltage Protection threshold (Non-latching Hiccup)		120% Vout max.
Over Current Protection threshold		110% ~ 140% of Iout Rated
Short circuit protection		Hiccup, automatics recovery
GENERAL SPECIFICATIONS		
Efficiency		See table
Isolation voltage	Input to Output Input to Case Output to Case	1600VDC,min. 1000VDC,min. 1000VDC,min.
Isolation resistance		10 ⁷ ohms, min.
Isolation capacitance		2500 pF, max.
Switching frequency		270 KHz, typ.
Approvals and standard		IEC60950-1, UL60950-1, EN60950-1
Case material		Aluminum base plate
Weight (approx)		42g (1.46 oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332 MIL-HDBK-217F	2.500 x 10 ⁶ hrs 6.311 x 10 ⁵ hrs

INPUT SPECIFICATIONS		
Input voltage range	24V nominal input 48V nominal input	18 – 36VDC 36 – 75VDC
Input filter		L-C type
Input surge voltage 100ms max	24V nominal input 48V nominal input	50VDC 100VDC
Start up time	Nominal Vin and constant resistive load	Power up Remote ON/OFF 25ms, typ. 25ms, typ.
Start-up voltage	24V nominal input 48V nominal input	17VDC 34VDC
Shutdown voltage	24V nominal input 48V nominal input	15VDC 32VDC
Remote ON/OFF (Note 6)		
Negative logic(Standard)	DC-DC ON DC-DC OFF	Short or 0V < Vr < 1.2V Open or 3V < Vr < 15V
Positive logic(Optional)	DC-DC ON DC-DC OFF	Open or 3V < Vr < 15V Short or 0V < Vr < 1.2V
Input current of remote control pin	Nominal Vin	-0.5~1.0mA
Remote off state input current	Nominal Vin	2.5mA
ENVIRONMENTAL SPECIFICATIONS		
Operating base-plate temperature range (Note 7)		-40°C to +100°C (with derating)
Over temperature protection		110°C, typ.
Storage temperature range		-55°C to +125°C
Thermal shock		MIL-STD-810F
Vibration		MIL-STD-810F
Humidity , Max , Non-Condensing		95%
EMC CHARACTERISTICS		
EMI (Note 8)	EN55022	Class A
Radiated immunity	EN61000-4-3	10 V/m Perf. Criteria A
Fast transient (Note 9)	EN61000-4-4	± 2KV Perf. Criteria B
Surge (Note 9)	EN61000-4-5	± 1KV Perf. Criteria B
Conducted immunity	EN61000-4-6	10 Vr.m.s Perf. Criteria A



Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Load regulation
			Min. load	Full load		No load ⁽³⁾	Full load ⁽²⁾		
QEB100-24S3P3	18 – 36 VDC	3.3 VDC	0mA	25A	100mVp-p	80mA	3997mA	89	10mV
QEB100-24S05	18 – 36 VDC	5 VDC	0mA	20A	100mVp-p	120mA	4845mA	90	15mV
QEB100-24S12	18 – 36 VDC	12 VDC	0mA	8.33A	100mVp-p	130mA	4843mA	90	36mV
QEB100-24S15	18 – 36 VDC	15 VDC	0mA	6.67A	100mVp-p	190mA	4847mA	90	45mV
QEB100-48S1P8	36 – 75 VDC	1.8 VDC	0mA	30A	100mVp-p	70mA	1389mA	85	5.4mV
QEB100-48S2P5	36 – 75 VDC	2.5 VDC	0mA	30A	100mVp-p	70mA	1883mA	87	7.5mV
QEB100-48S3P3	36 – 75 VDC	3.3 VDC	0mA	25A	100mVp-p	75mA	2022mA	89	10mV
QEB100-48S05	36 – 75 VDC	5 VDC	0mA	20A	100mVp-p	80mA	2422mA	90	15mV
QEB100-48S12	36 – 75 VDC	12 VDC	0mA	8.33A	100mVp-p	130mA	2422mA	90	36mV
QEB100-48S15	36 – 75 VDC	15 VDC	0mA	6.67A	100mVp-p	130mA	2424mA	90	45mV

Note :

- 1.BELLCORE TR-NWT-000332. Case 1: 80% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
- 2.Maximum value at nominal input voltage and full load of standard type.
- 3.Typical value at nominal input voltage and no load.
- 4.Typical value at nominal input voltage and full load.
- 5.Maximum output deviation is 10% inclusive of trim. If remote sense is not being used, the + sense should be connected to its corresponding +OUTPUT and likewise the –sense should be connected to its corresponding –OUTPUT.
- 6.The positive logic and pin length are optional (see table). The pin voltage is referenced to –Vin.
- 7.Heat sink is optional and P/N : 7G-0029A-F, 7G-0030A-F, 7G-0031A-F, 7G-0032A-F.
- 8.The QEB100 meets EN55022 class A and class B only with external components connected before the input pin to the converter.
- 9.An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220μF/100V, ESR 48mΩ .
- 10.BASEPLATE GROUNDING : Base-plate should be grounded at one of the four screw bolts prior to operation.
- 11.The converter is provided by basic insulation.





Technical drawing showing the bottom view of a PCB. The drawing includes dimensions in inches and millimeters (mm) in parentheses. Key dimensions include:

- Overall width: 2.28 (57.9)
- Overall height: 1.45 (36.8)
- Distance from top edge to center of top mounting holes: 0.43 (10.9)
- Distance from top edge to center of bottom mounting holes: 0.300 (7.62)
- Distance from left edge to center of left mounting holes: 0.21 (5.3)
- Distance from left edge to center of right mounting holes: 0.14 (3.6)
- Distance from center of left mounting holes to center of right mounting holes: 1.86 (47.24)
- Distance from center of right mounting holes to right edge: 0.20 (5.1)
- Distance from center of right mounting holes to right edge of the bottom section: 0.50 (12.7)
- Distance from center of right mounting holes to the bottom edge of the bottom section: 0.02 (0.5)
- Distance from center of right mounting holes to the bottom edge of the main body: 0.150 (3.81)
- Distance from center of right mounting holes to the bottom edge of the bottom section: 0.300 (7.62)
- Distance from center of right mounting holes to the bottom edge of the bottom section: 0.450 (11.43)
- Distance from center of right mounting holes to the bottom edge of the bottom section: 0.600 (15.24)
- Distance from center of right mounting holes to the bottom edge of the bottom section: 1.030 (26.16)
- Distance from center of right mounting holes to the bottom edge of the bottom section: 0.20 (5.1)
- Distance from center of right mounting holes to the bottom edge of the bottom section: 0.50 (12.7)
- Distance from center of right mounting holes to the bottom edge of the bottom section: 0.02 (0.5)






Pin locations are numbered 1 through 8. The bottom section is labeled "Bottom View".

Pin 1, 2, 3, 5, 6, 7 DIA. 0.040 (1.02mm)
 Pin 4, 8 DIA. 0.060 (1.52mm)
 All dimensions in inches (mm)
 Tolerance: x.xx±0.02 (x.xx±0.5)
 x.xxx±0.01 (x.xx±0.25)
 Pin pitch tolerance ±0.01 (0.25)
 Pin dimension tolerance ±0.004 (0.1)

The 'TRIM UP' diagram shows a variable resistor R_U connected between pins 7 and 6, with an arrow pointing towards pin 7. The 'TRIM DOWN' diagram shows a variable resistor R_D connected between pins 6 and 5, with an arrow pointing towards pin 5.

PIN CONNECTION	
PIN	Define
1	- INPUT
2	ON/OFF
3	+ INPUT
4	- OUTPUT
5	- SENSE
6	TRIM
7	+ SENSE
8	+ OUTPUT

PRODUCT OPTIONS TABLE	
Option	Suffix
Negative remote ON/OFF logic, 0.20" pin length (standard)	-
Negative remote ON/OFF logic, 0.145" pin length	-L
Negative remote ON/OFF logic, 0.11" pin length	-K
Positive remote ON/OFF logic, 0.20" pin length	-P
Positive remote ON/OFF logic, 0.145" pin length	-S
Positive remote ON/OFF logic, 0.11" pin length	-M

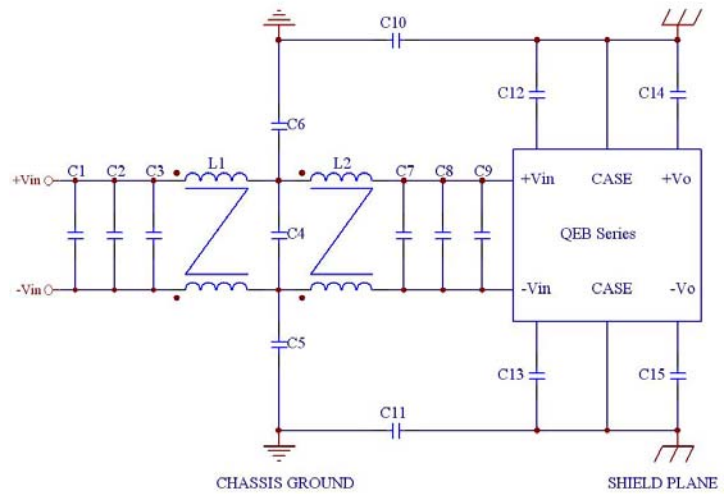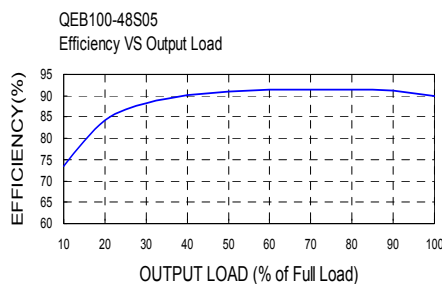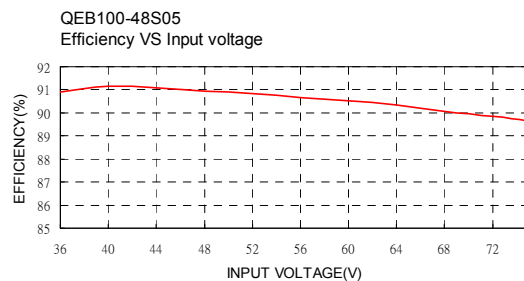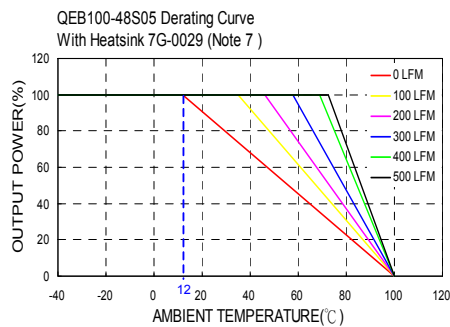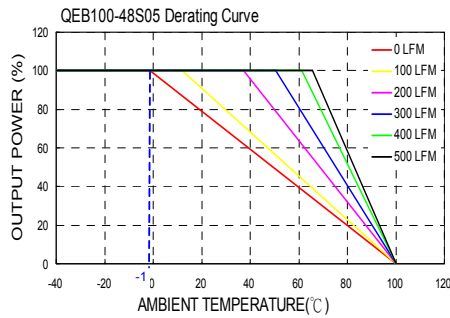


Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2	C3	C4	C5
QEB100-24Sxx	685pF/50V	685pF/50V	685pF/50V	685pF/50V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	685pF/50V	685pF/50V	685pF/50V	0.1μF/50V
	C11	C12	C13	C14	C15
	0.1μF/50V	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV
	L1	L2			
	1.37mH	1.37mH			

	C1	C2	C3	C4	C5
QEB100-48Sxx	100μF/100V	1.5μF/100V	1.5μF/100V	1.5μF/100V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	47μF/100V	1.5μF/100V	1.5μF/100V	0.1μF/50V
	C11	C12	C13	C14	C15
	0.1μF/50V	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV
	L1	L2			
	620μH	620μH			

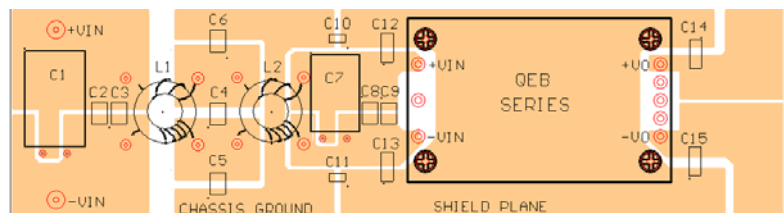

Recommended EN55022 Class B Filter Circuit Layout

