

| PANDUIT<br>PART NUMBER |          | STUD<br>SIZE | DIMENSIONS in. |               |               |                |               |
|------------------------|----------|--------------|----------------|---------------|---------------|----------------|---------------|
|                        |          |              | A $\pm .03$    | W $\pm .01$   | C $\pm .02$   | M $\pm .03$    | H $\pm .01$   |
| PV14-4R                | -C<br>-M | #4           | .84<br>(21.3)  | .25<br>(6.4)  | .19<br>(4.8)  | .71<br>(18.0)  | .12<br>(3.1)  |
| PV14-6RN               | -C<br>-M | #6           | .84<br>(21.3)  | .25<br>(6.4)  | .19<br>(4.8)  | .71<br>(18.0)  | .15<br>(3.8)  |
| PV14-6R                | -C<br>-M | #6           | .92<br>(23.4)  | .31<br>(7.9)  | .25<br>(6.4)  | .76<br>(19.3)  | .15<br>(3.8)  |
| PV14-8R                | -C<br>-M | #8           | .92<br>(23.4)  | .31<br>(7.9)  | .25<br>(6.4)  | .76<br>(19.3)  | .17<br>(4.3)  |
| PV14-10R               | -C<br>-M | #10          | .92<br>(23.4)  | .31<br>(7.9)  | .25<br>(6.4)  | .76<br>(19.3)  | .20<br>(5.1)  |
| PV14-14R               | -C<br>-M | 1/4"         | 1.12<br>(28.5) | .46<br>(11.7) | .38<br>(9.7)  | .89<br>(22.6)  | .27<br>(6.9)  |
| PV14-56R               | -C<br>-M | 5/16"        | 1.12<br>(28.5) | .46<br>(11.7) | .38<br>(9.7)  | .89<br>(22.6)  | .34<br>(8.6)  |
| PV14-38R               | -L<br>-M | 3/8"         | 1.21<br>(30.7) | .53<br>(13.5) | .43<br>(10.9) | .94<br>(23.9)  | .40<br>(10.2) |
| PV14-12R               | -L       | 1/2"         | 1.42<br>(36.1) | .72<br>(18.3) | .53<br>(13.5) | 1.06<br>(26.9) | .52<br>(13.2) |

## NOTES:

- UL LISTED & CSA CERTIFIED FOR
  - 600 V. MAX. VOLTAGE RATING (1000 V. MAX. IN SIGNS, FIXTURES AND LUMINAIRES.)
  - 18-14 AWG SOLID OR STRANDED COPPER WIRE & 221°F (105°C) MAX TEMP RATING, WITH THE CT-500 & CT-550, CT-1551, CT-1550 INSTALLATION TOOLS.
  - 16-14 AWG SOLID OR STRANDED COPPER WIRE & 167°F (75°C) MAX TEMP RATING WITH THE CT-100 INSTALLATION TOOLS.

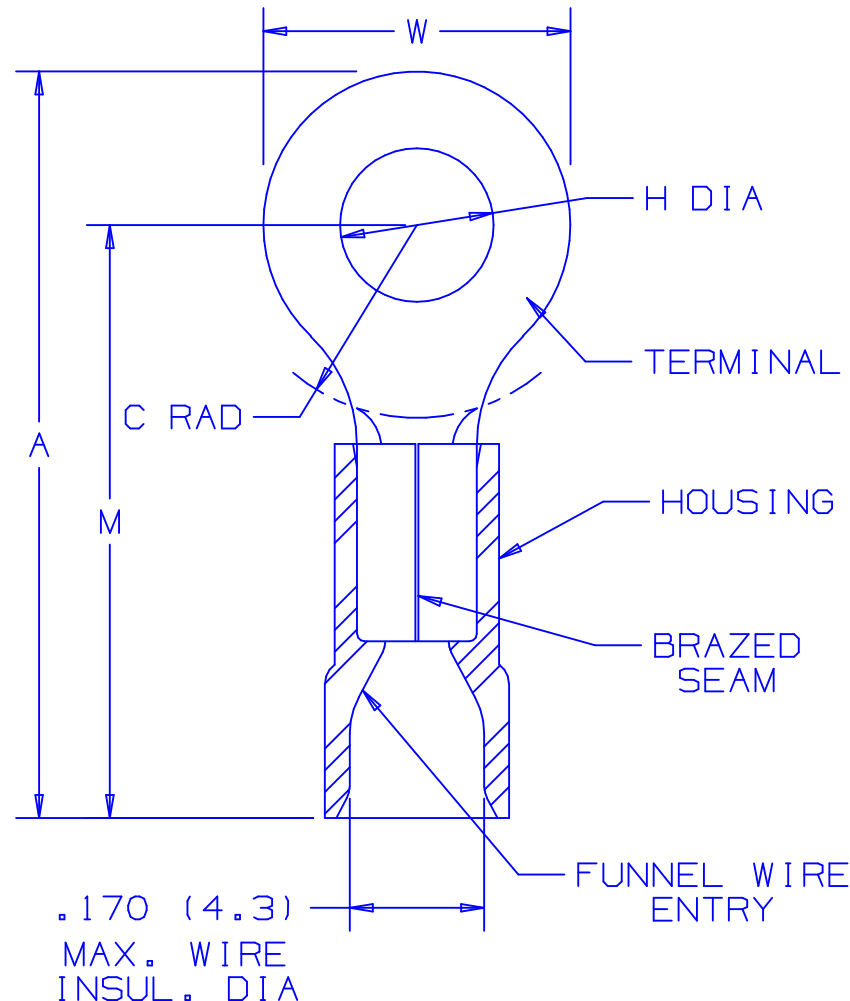
## 2. MATERIAL:

- STAMPING - .032 (.8) THK COPPER, TIN PLATED
- HOUSING - VINYL, BLUE

3. STRIP LENGTH 5/16  $\pm 1/32$  -0

4. PACKAGE QTY.: -L=50  
STD PKG-C=100  
BULK PKG-M=1000

5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

CERTIFIED  
LR31212LISTED  
587H  
E52164

A41184\_05

|     |       |     |     |                                              |       |      |     |                           |
|-----|-------|-----|-----|----------------------------------------------|-------|------|-----|---------------------------|
| 05  | 12/02 | SAC |     | FOR PV14-12R DIM A WAS 1.41 & DIM M WAS 1.05 |       |      |     | <br>TINLEY PARK, ILLINOIS |
| 04  | 5/02  | SRB | SKB | CHANGED (DIMS.) TO 1 PLACE DECIMAL           | 10231 | LA   | TRO |                           |
| 03  | 4/02  | SRB | SKB | ADDED PV14-12R                               | 10171 | LA   | TRO |                           |
| REV | DATE  | BY  | CHK | DESCRIPTION                                  | ECN # | CUST | PM  | DRAWN BY<br>FES           |
|     |       |     |     |                                              |       |      |     | CHK'D<br>                 |
|     |       |     |     |                                              |       |      |     | SCALE<br>NONE             |
|     |       |     |     |                                              |       |      |     | DRAWING NO.<br>A41184     |

2PC. VINYL INSULATED,  
#16-14 BARREL, RINGS