

BTE6000 / PTU6000...CS Series

Submersible precision stainless steel transmitters

FEATURES

- 0...100 mbar to 0...10 bar, 0...2 to 0...150 psi gage or absolute
- For corrosive media
- 0...10 V, 1...6 V, 0...20 mA or 4...20 mA output
- Field interchangeable
- For harsh environments

MEDIA COMPATIBILITY

Wetted materials:
stainless steel 1.4404 (316L), PVC, PUR, NBR¹¹

Housing:
protection class IP 68 (according to DIN EN 60529)
respectively NEMA 6P¹

SPECIFICATIONS^{9,10}


Maximum ratings

Supply voltage (reverse polarity protection)	
BTE(M)/PTU6...0..., 1...	13...30 V
BTE(M)/PTU6...4..., 5... ²	12...36 V
Maximum load current	
BTE(M)/PTU6...0..., 1...	10 mA
Temperature limits	
Storage	-40 to 85°C
Operating	-25 to 85°C
Compensated	0 to 70°C
Vibration (5 to 500 Hz)	10 g _{RMS}
Mechanical shock	50 g
Proof pressure ³	2 x rated pressure




ELECTRICAL CONNECTION


0...10 V, 1...6 V output

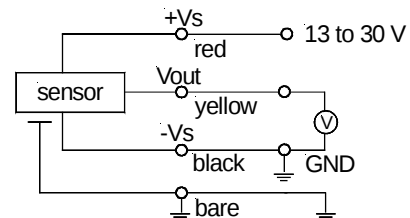

0...20 mA output

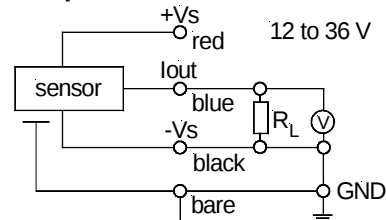

4...20 mA output

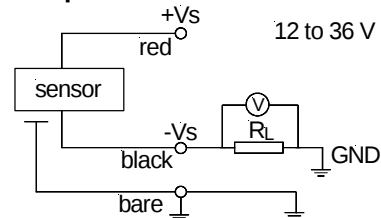

BTE6000 / PTU6000...CS Series

Submersible precision stainless steel transmitters

COMMON PERFORMANCE CHARACTERISTICS¹

Characteristics		Min.	Typ.	Max.	Unit
Operating pressure	BTEM6100...	0		100	mbar
	BTEM6250...	0		250	
	BTEM6350...	0		350	
	BTEM6500...	0		500	
	BTE6001...	0		1	bar
	BTE6002...	0		2	
	BTE6005...	0		5	
	BTE6010...	0		10	
	PTU6002...	0		2	psi
	PTU6003...	0		3	
	PTU6005...	0		5	
	PTU6010...	0		10	
	PTU6015...	0		15	
	PTU6030...	0		30	
	PTU6050...	0		50	
	PTU6100...	0		100	
	PTU6150...	0		150	
Thermal effects (0 to 70°C) ⁴ (-25 to 0°C, 70 to 85°C)	Offset		0.02	0.04	%FSO/°C
	Span		0.02	0.04	
	Offset		0.03		
	Span		0.03		
Non-linearity and hysteresis (BSL) ⁵			±0.1	0.25	%FSO
Repeatability			±0.1		
Long term stability ⁶			±0.2		
Output noise (0 < f < 1 kHz)			±0.04		
Response time (10 to 90 %)			1		ms
Power supply rejection	Offset		0.05		%FSO/V
	Span		0.05		

BTE6000 / PTU6000...CS Series

Submersible precision stainless steel transmitters

INDIVIDUAL PERFORMANCE CHARACTERISTICS¹

0...10 V output ($V_s = 15\text{ V}$, $R_L > 100\text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics	Min.	Typ.	Max.	Unit
Zero pressure offset	-0.15	0	0.15	V
Full scale span ⁷	9.9	10.0	10.1	
Output impedance			50	Ω
Power consumption (no load)		100		mW

1...6 V output ($V_s = 15\text{ V}$, $R_L > 100\text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics	Min.	Typ.	Max.	Unit
Zero pressure offset	0.85	1.0	1.15	V
Full scale span ⁷	4.9	5.0	5.1	
Full scale output		6.0		
Output impedance			50	Ω
Power consumption (no load)		100		mW

4...20 mA output ($V_s = 15\text{ V}$, $R_L > 100\text{ }\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics	Min.	Typ.	Max.	Unit
Zero pressure offset	3.85	4.0	4.15	mA
Full scale span ⁷	15.9	16.0	16.1	
Output impedance		0.1		Ω
Power consumption ($I_L = 20\text{ mA}$)		260		mW

0...20 mA output ($V_s = 15\text{ V}$, $R_L > 100\text{ }\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics	Min.	Typ.	Max.	Unit
Zero pressure offset	-0.15	0	0.15	mA
Full scale span ⁷	19.9	20.0	20.1	
Output impedance		0.1		Ω
Power consumption ($I_L = 20\text{ mA}$)		260		mW

BTE6000 / PTU6000...CS Series

Submersible precision stainless steel transmitters

ELECTROMAGNETIC CAPABILITY⁸

	Test conditions	Criterion	Interference
Radiated, radio frequency electromagnetic field immunity (RFI)	EN61000-4-3: Grade 3 10 V/m, 80 MHz to 1000 MHz 80 % AMC (1 kHz)	A	<1 % FSO
Electrical fast transient / burst immunity (EFT)	EN61000-4-4: Grade 3 ±2 kV	B	<1 % FSO
Electrostatic discharge immunity test (ESD)	EN61000-4-2: Grade 4 ±8 kV, contact discharge	B	<1 % FSO
Immunity to conducted disturbances induced by radio-frequency fields	EN61000-4-6: Grade 3 0,15 to 80 MHz 10 V, 80 % AMC (1 kHz)	A	<1 % FSO

Specification notes (for all devices):


1. The package is a all-sealed housing. Gage devices are vented through an integral PE tube of the connecting cable.
2. The minimum supply voltage is directly proportional to the load resistance seen by the transmitter. For more details see the [load limitation](#) diagrams.
3. Proof pressure is the maximum pressure which may be applied without causing damage to the sensing element.
4. Thermal effects tested and guaranteed from 0 to 70°C relative to 25°C. All specifications shown are relative to 25°C.
5. Non-linearity refers to the **Best Straight Line** fit measured for offset, full scale span and 1/2 full scale span.
6. Long term stability is the change in output after one year or 1 million pressure cycles.
7. Span is the arithmetic difference in transmitter output signal measured at zero pressure and the maximum operating pressure.
8. Test are in accordance with EN61000-6-2, April 1999.
9. CE-labelling is in accordance with 89/336/EEC.
10. The pressure transmitters must not be used as safety accessories according to article 1, 2.1.3 of the directive 97/23/EC.
11. Other sealing materials are available on request.

BTE6000 / PTU6000...CS Series


Submersible precision stainless steel transmitters

OUTPUT CHARACTERISTICS

Voltage output versions

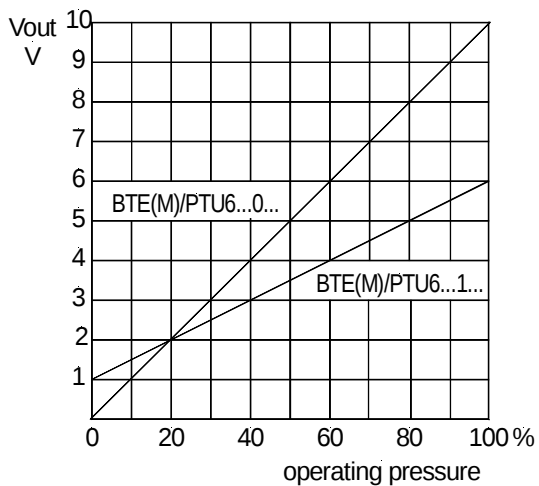

Current output versions

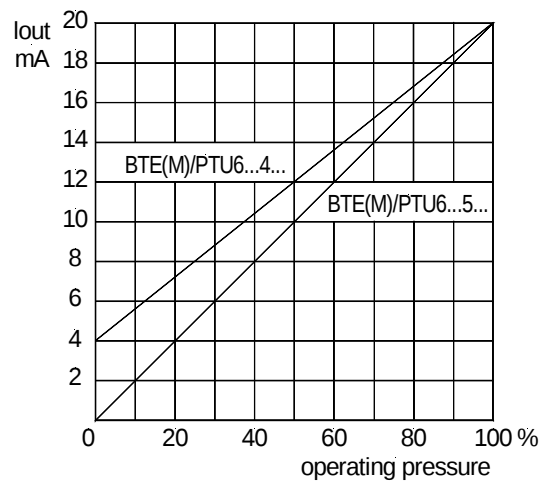

LOAD LIMITATION

0...20 mA output version

4...20 mA output version

