

## Fast Recovery Epitaxial Diode (FRED) Module


PSND 50E

$$I_{FAV} = 50 \text{ A}$$

$$V_{RRM} = 200-600 \text{ V}$$

Preliminary Data Sheet

| $V_{RSM}$<br>V | $V_{RRM}$<br>V | Type        |
|----------------|----------------|-------------|
| 200            | 200            | PSND 50E/02 |
| 400            | 400            | PSND 50E/04 |
| 600            | 600            | PSND 50E/06 |



### Features

- Package with screw terminals
- Isolation voltage 3000 V~
- Planar glasspassivated chips
- Short recovery time
- Low forward voltage drop
- Short recovery behaviour
- UL registered, E 148688

### Applications


- Inductive heating and melting
- Free wheeling diode in converters and motor control circuits
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

### Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

### Package, style and outline

Dimensions in mm (1mm = 0.0394")

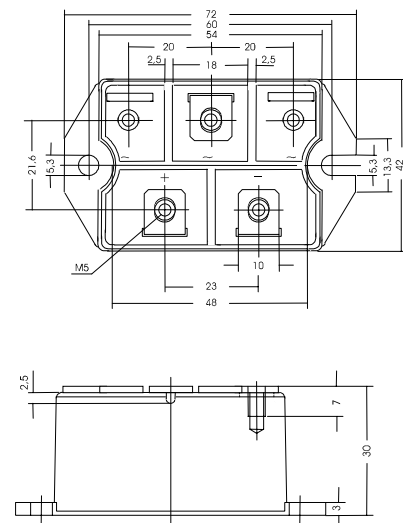

| Symbol        | Test Conditions             |                              |                   | Maximum Ratings |                        |
|---------------|-----------------------------|------------------------------|-------------------|-----------------|------------------------|
| $I_{FAV}$     | $T_C = 85^\circ\text{C}$    |                              |                   | 50              | A                      |
| $I_{FSM}$     | $T_{VJ} = 45^\circ\text{C}$ | $t = 10 \text{ ms}$          | (50 Hz), sine     | 800             | A                      |
|               |                             | $t = 8.3 \text{ ms}$         | (60 Hz), sine     | 880             | A                      |
|               | $T_{VJ} = T_{VJM}$          | $t = 10 \text{ ms}$          | (50 Hz), sine     | 720             | A                      |
|               |                             | $t = 8.3 \text{ ms}$         | (60 Hz), sine     | 790             | A                      |
| $\int i^2 dt$ | $T_{VJ} = 45^\circ\text{C}$ | $t = 10 \text{ ms}$          | (50 Hz), sine     | 3200            | $\text{A}^2 \text{ s}$ |
|               |                             | $t = 8.3 \text{ ms}$         | (60 Hz), sine     | 3210            | $\text{A}^2 \text{ s}$ |
|               | $T_{VJ} = T_{VJM}$          | $t = 10 \text{ ms}$          | (50 Hz), sine     | 2590            | $\text{A}^2 \text{ s}$ |
|               |                             | $t = 8.3 \text{ ms}$         | (60 Hz), sine     | 2590            | $\text{A}^2 \text{ s}$ |
| $T_{VJ}$      |                             |                              |                   | -40 ... + 150   | $^\circ\text{C}$       |
| $T_{VJM}$     |                             |                              |                   | 150             | $^\circ\text{C}$       |
| $T_{stg}$     |                             |                              |                   | -40 ... + 125   | $^\circ\text{C}$       |
| $V_{ISOL}$    | 50/60 HZ, RMS               | $t = 1 \text{ min}$          |                   | 2500            | V ~                    |
|               |                             | $I_{ISOL} \leq 1 \text{ mA}$ | $t = 1 \text{ s}$ | 3000            | V ~                    |
| $M_d$         | Mounting torque             |                              | (M5)              | 5               | Nm                     |
|               | Terminal connection torque  |                              | (M5)              | 5               | Nm                     |
| Weight        | typ.                        |                              |                   | 160             | g                      |

| Symbol     | Test Conditions                                                                                                    |                             |        | Characteristic Value |                  |
|------------|--------------------------------------------------------------------------------------------------------------------|-----------------------------|--------|----------------------|------------------|
| $I_R$      | $V_R = V_{RRM}$                                                                                                    | $T_{VJ} = 25^\circ\text{C}$ | $\leq$ | 150                  | $\mu\text{A}$    |
|            | $V_R = V_{RRM}$                                                                                                    | $T_{VJ} = T_{VJM}$          | $\leq$ | 15                   | mA               |
| $V_F$      | $I_F = 50 \text{ A}$                                                                                               | $T_{VJ} = 25^\circ\text{C}$ | $\leq$ | 1.25                 | V                |
| $t_{rr}$   | $T_{VJ} = 25^\circ\text{C}$ , $I_F = 1 \text{ A}$ ;<br>$-di/dt = 100 \text{ A}/\mu\text{s}$ ; $V_R = 30 \text{ V}$ |                             |        | typ. 60              | ns               |
| $V_{TO}$   | For power-loss calculations only                                                                                   |                             |        | 1.1                  | V                |
| $r_T$      | $T_{VJ} = T_{VJM}$                                                                                                 |                             |        | 2.6                  | $\text{m}\Omega$ |
| $R_{thJC}$ | per diode; DC current                                                                                              |                             |        | 0.9                  | K/W              |
|            | per module                                                                                                         |                             |        | 0.45                 | K/W              |
| $R_{thJK}$ | per diode; DC current                                                                                              |                             |        | 1.1                  | K/W              |
|            | per module                                                                                                         |                             |        | 0.55                 | K/W              |
| $d_s$      | Creeping distance on surface                                                                                       |                             |        | 10                   | mm               |
| $d_A$      | Creeping distance in air                                                                                           |                             |        | 9.4                  | mm               |
| $a$        | Max. allowable acceleration                                                                                        |                             |        | 50                   | $\text{m/s}^2$   |