

1. PART NO. EXPRESSION :

PSB07051R0MZ F

(a) (b) (c) (d)(e)(f)

(a) Series code

(b) Dimension code


(c) Inductance code : 1R0 = 1.0uH

(d) Tolerance code : K = $\pm 10\%$, L = $\pm 15\%$, M = $\pm 20\%$

(e) X, Y, Z : Standard part

(f) F : Lead Free


2. CONFIGURATION & DIMENSIONS :

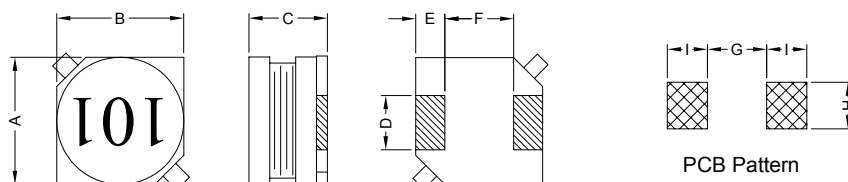


Unit:m/m

A	B	C	D	E	F	G	H	I
7.0 $\pm$ 0.3	7.0 $\pm$ 0.3	4.6 $\pm$ 0.3	2.0 $\pm$ 0.2	1.5 $\pm$ 0.2	4.0 $\pm$ 0.2	3.7 Ref.	2.2 Ref.	1.9 Ref.

3. SCHEMATIC :



4. MATERIALS :



(a) Core : DR Ferrite Core

(b) Base : LCP

(c) Wire : Enamelled Copper Wire

(d) Terminal : Tinned Copper Plate

(e) Adhesive : Epoxy

(f) Ink : Bon Margue

5. GENERAL SPECIFICATION :

a) Temp. rise : 40°C Max.

b) Rated current : Base on temp. rise & $\Delta L/L0A = 10\%$ Max.

c) Storage temp. : -40°C to +125°C

d) Operating temp. : -40°C to +85°C

e) Resistance to solder heat : 260°C.10 secs



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (μ H)	Test Frequency (Hz)	RDC ($m\Omega$) Max.	IDC (A) Max.
PSB07051R0MZ	1.0 $\pm$ 20%	1V / 100K	23	3.50
PSB07051R5MZ	1.5 $\pm$ 20%	1V / 100K	28	3.20
PSB07052R2MZ	2.2 $\pm$ 20%	1V / 100K	33	3.00
PSB07053R3MZ	3.3 $\pm$ 20%	1V / 100K	40	2.70
PSB07054R7MZ	4.7 $\pm$ 20%	1V / 100K	50	2.50
PSB07056R8MZ	6.8 $\pm$ 20%	1V / 100K	60	2.20
PSB0705100MZ	10.0 $\pm$ 20%	1V / 100K	75	2.00
PSB0705120MZ	12.0 $\pm$ 20%	1V / 100K	85	1.90
PSB0705150LZ	15.0 $\pm$ 15%	1V / 100K	90	1.50
PSB0705180LZ	18.0 $\pm$ 15%	1V / 100K	100	1.40
PSB0705220LZ	22.0 $\pm$ 15%	1V / 100K	120	1.30
PSB0705270LZ	27.0 $\pm$ 15%	1V / 100K	150	1.20
PSB0705330LZ	33.0 $\pm$ 15%	1V / 100K	180	1.10
PSB0705390LZ	39.0 $\pm$ 15%	1V / 100K	190	1.00
PSB0705470LZ	47.0 $\pm$ 15%	1V / 100K	220	0.90
PSB0705560KZ	56.0 $\pm$ 10%	1V / 100K	250	0.85
PSB0705680KZ	68.0 $\pm$ 10%	1V / 100K	270	0.80
PSB0705820KZ	82.0 $\pm$ 10%	1V / 100K	380	0.70
PSB0705101KZ	100.0 $\pm$ 10%	1V / 100K	420	0.65
PSB0705121KZ	120.0 $\pm$ 10%	1V / 100K	520	0.60
PSB0705151KZ	150.0 $\pm$ 10%	1V / 100K	580	0.50
PSB0705181KZ	180.0 $\pm$ 10%	1V / 100K	650	0.45
PSB0705221KZ	220.0 $\pm$ 10%	1V / 100K	880	0.40
PSB0705271KZ	270.0 $\pm$ 10%	1V / 100K	990	0.35
PSB0705331KZ	330.0 $\pm$ 10%	1V / 100K	1100	0.32
PSB0705391KZ	390.0 $\pm$ 10%	1V / 100K	1400	0.30
PSB0705471KZ	470.0 $\pm$ 10%	1V / 100K	1900	0.28
PSB0705561KZ	560.0 $\pm$ 10%	1V / 100K	2200	0.25
PSB0705681KZ	680.0 $\pm$ 10%	1V / 100K	2500	0.22
PSB0705821KZ	820.0 $\pm$ 10%	1V / 100K	2900	0.20
PSB0705102KZ	1000.0 $\pm$ 10%	1V / 100K	4000	0.18



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


05.05.2008




SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :


@ TEMP. RISE VS. DC SUPERPOSITION RESPONSE CURVE

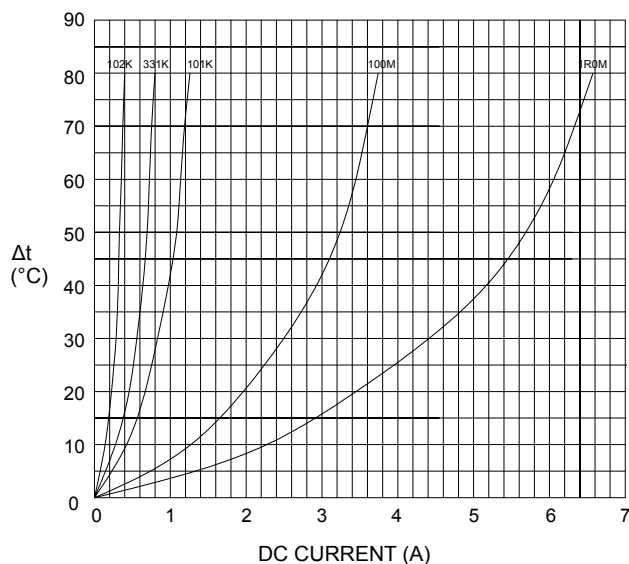

@ INDUCTANCE VS. FREQUENCY RESPONSE CURVE

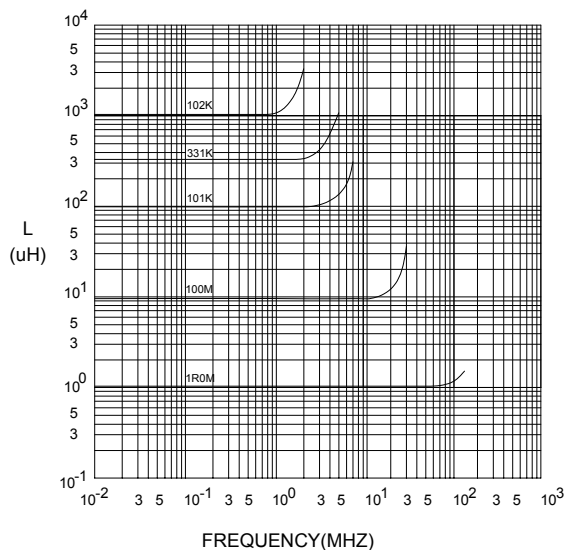

@ INDUCTANCE VS. DC SUPERPOSITION RESPONSE CURVE

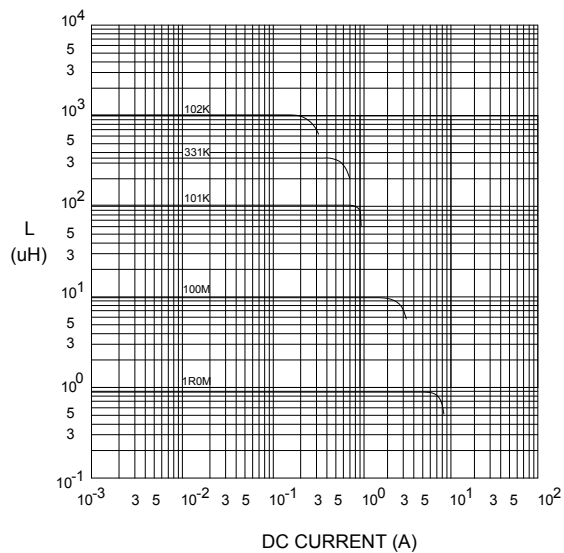

NOTE : Specifications subject to change without notice. Please check our website for latest information.




RoHS Compliant

05.05.2008




SUPERWORLD ELECTRONICS (S) PTE LTD

RECOMMENDED SOLDERING CONDITIONS REFLOW SOLDERINGS

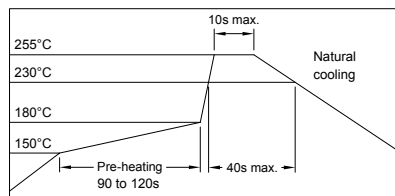


8. PACKAGING INFORMATION :

(1) CONFIGURATION

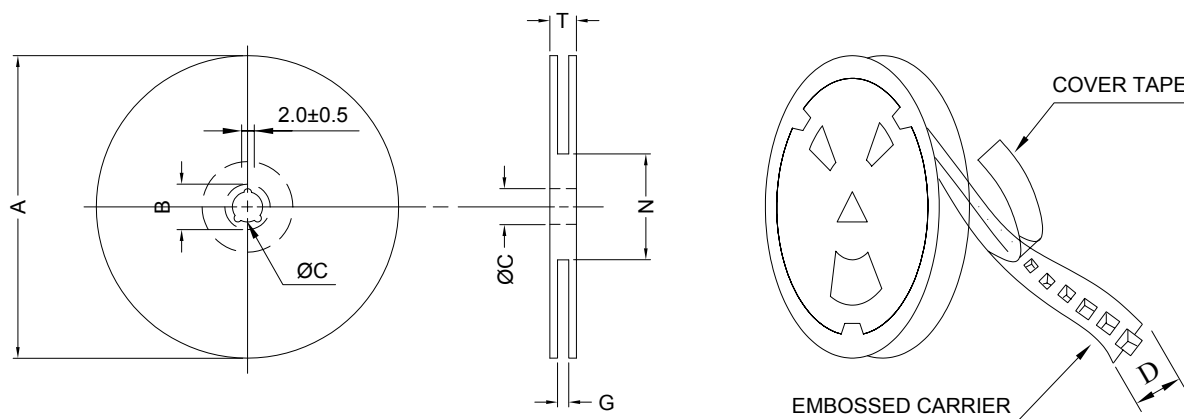

* CARRIER TAPE WIDTH : D

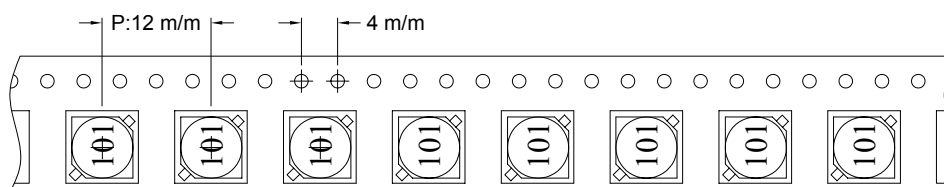

(2) DIMENSIONS

Unit:m/m

STYLE	A	B	C	D	G	N	T
13-16	330	21±0.8	13	16	18 ⁺⁰	50 ⁻⁰	22.4

(3) Q'TY & G.W. PER PACKAGE

SERIES	INNER : REEL			OUTER : CARTON		
	Q'TY (PCS)	G.W. (gw)	STYLE	Q'TY (PCS)	G.W. (Kg)	SIZE (cm)
PSB0705	1000	680	13-16	6000	7.6	40 x 40 x 24



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

9. RELIABILITY AND TEST CONDITION :

TEST ITEM	SPECIFICATION	TEST CONDITION
SOLDERABILITY	MORE THAN 90% OF THE TERMINAL ELECTRODE SHALL BE COVERED WITH FRESH SOLDER.	PREHEAT : 125±25°C FOR 60 SECONDS SOLDER : 99%Sn/0.3%Ag/0.7%Cu OR EQUIVALENT SOLDER TEMP. : 245±5°C FLUX : ROSIN DIP TIME : 4±1 SECONDS
THERMAL SHOCK TEST (TEMP. CYCLE)	INDUCTANCE SHALL NOT CHANGE MORE THAN ±20%	ROOM TEMP. → -25±2°C 15 MINUTES 30 MINUTES ROOM TEMP. → 85±2°C 15 MINUTES 30 MINUTES TOTAL : 50 CYCLES
HUMIDITY RESISTANCE TEST		TEMPERATURE : 40±2°C HUMIDITY : 90 ~ 95% APPLIED CURRENT : PER SPEC. TIME : 500 HOURS
HIGH TEMP. RESISTANCE TEST		TEMPERATURE : 85±2°C APPLIED CURRENT : PER SPEC. TIME : 500 HOURS



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

10. UL CARD :

OBMW2

November 30, 2000

Magnet Wire - Component

PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD

E201757

607 BAOLONG INDUSTRIAL ESTATE LONGGANG, SHENZHEN

GUANGDONG CHINA

Mtl Dsg	BC	Coating Type	TC	ANSI Type	TI
UEW/U		Polyurethane	—	—	130
PEW/U		Polyester	—	MW5-C	155°C
PEWH/U		Modified Polyester	—	MW30-C	180
PEW-NY/U		Polyester	Polyamide	MW24-C	155
HAI/U		Polyester(Amide)(Imide)	Polyamideimide	MW35,73	200
UEW-NY/U		Polyurethane	Polyamide	MW80-C	155
				MW28-C	130

Marking: Company name and material designation or marked designation on package or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions

1/3/2001

Underwriters Laboratories Inc.

Card 1 of 2

SUMITOMO CHEMICAL CO LTD E54705 (M)
5-33 KITAHAMA 4-CHOME CHUO-KO, OSAKA JAPAN

Mtl Dsg	Col	Min Thk mm	UL94 Flame Class	Elec	RTI		H W I	H A I	H V T R	D 4 9 5	C T I
					Mech with Imp	w/o Imp					
Liquid crystal polyester (LCP), designated "EKONOL" or "SUMIKASUPER", furnished in the form of pellets, (Contd)											
E4008, E400X	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
E4008	NC , WT , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
E4010	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
E400(Y)L, E4008L	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
E4810	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	0	4	—	—	—
		1.5	94V-0	130	130	130	0	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
(X) Denotes any number 1 thru 9.											
(Y) Denotes any number 1 thru 7.											



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD