

1. PART NO. EXPRESSION :

PSB06051R2MZ F

(a) (b) (c) (d)(e)(f)

(a) Series code

(b) Dimension code


(c) Inductance code : 1R2 = 1.2uH

(d) Tolerance code : K = $\pm 10\%$, M = $\pm 20\%$

(e) X, Y, Z : Standard part

(f) F : Lead Free

2. CONFIGURATION & DIMENSIONS :

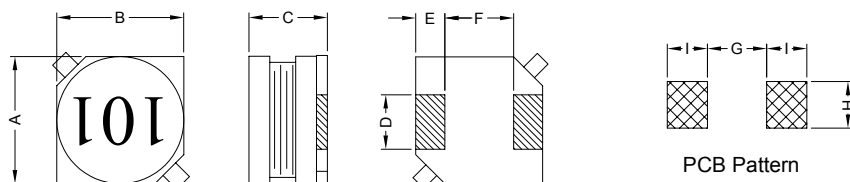


PCB Pattern


Unit:m/m

A	B	C	D	E	F	G	H	I
6.0 $\pm$ 0.3	6.0 $\pm$ 0.3	4.9 $\pm$ 0.3	2.0 $\pm$ 0.2	1.5 $\pm$ 0.2	3.0 $\pm$ 0.2	2.8 Ref.	2.2 Ref.	1.9 Ref.

3. SCHEMATIC :



4. MATERIALS :



(a) Core : DR Ferrite Core

(b) Base : LCP

(c) Wire : Enamelled Copper Wire

(d) Terminal : Tinned Copper Plate

(e) Adhesive : Epoxy

(f) Ink : Bon Margue

5. GENERAL SPECIFICATION :

- a) Temp. rise : 40°C Max.
- b) Rated current : Base on temp. rise & $\Delta L/L0A = 10\%$ Max.
- c) Storage temp. : -40°C to +125°C
- d) Operating temp. : -40°C to +85°C
- e) Resistance to solder heat : 260°C.10 secs



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (μ H)	Test Frequency (Hz)	RDC ($m\Omega$) Max.	IDC (A) Max.
PSB06051R2MZF	1.2 $\pm$ 20%	1V / 100K	28	3.50
PSB06051R5MZF	1.5 $\pm$ 20%	1V / 100K	30	3.00
PSB06052R2MZF	2.2 $\pm$ 20%	1V / 100K	35	2.70
PSB06053R3MZF	3.3 $\pm$ 20%	1V / 100K	42	2.50
PSB06054R7MZF	4.7 $\pm$ 20%	1V / 100K	50	2.20
PSB06056R8MZF	6.8 $\pm$ 20%	1V / 100K	60	2.00
PSB0605100MZF	10.0 $\pm$ 20%	1V / 100K	70	1.80
PSB0605120MZF	12.0 $\pm$ 20%	1V / 100K	80	1.60
PSB0605150MZF	15.0 $\pm$ 20%	1V / 100K	90	1.50
PSB0605180MZF	18.0 $\pm$ 20%	1V / 100K	95	1.30
PSB0605220MZF	22.0 $\pm$ 20%	1V / 100K	110	1.20
PSB0605270MZF	27.0 $\pm$ 20%	1V / 100K	130	1.10
PSB0605330KZF	33.0 $\pm$ 10%	1V / 100K	180	1.00
PSB0605390KZF	39.0 $\pm$ 10%	1V / 100K	210	0.90
PSB0605470KZF	47.0 $\pm$ 10%	1V / 100K	220	0.80
PSB0605560KZF	56.0 $\pm$ 10%	1V / 100K	250	0.75
PSB0605680KZF	68.0 $\pm$ 10%	1V / 100K	300	0.70
PSB0605820KZF	82.0 $\pm$ 10%	1V / 100K	390	0.60
PSB0605101KZF	100.0 $\pm$ 10%	1V / 100K	430	0.55
PSB0605121KZF	120.0 $\pm$ 10%	1V / 100K	500	0.50
PSB0605151KZF	150.0 $\pm$ 10%	1V / 100K	620	0.45
PSB0605181KZF	180.0 $\pm$ 10%	1V / 100K	690	0.40
PSB0605221KZF	220.0 $\pm$ 10%	1V / 100K	890	0.38
PSB0605271KZF	270.0 $\pm$ 10%	1V / 100K	1000	0.35
PSB0605331KZF	330.0 $\pm$ 10%	1V / 100K	1400	0.32
PSB0605391KZF	390.0 $\pm$ 10%	1V / 100K	1500	0.30
PSB0605471KZF	470.0 $\pm$ 10%	1V / 100K	2000	0.28
PSB0605561KZF	560.0 $\pm$ 10%	1V / 100K	2300	0.25
PSB0605681KZF	680.0 $\pm$ 10%	1V / 100K	3200	0.20
PSB0605821KZF	820.0 $\pm$ 10%	1V / 100K	3500	0.18
PSB0605102KZF	1000.0 $\pm$ 10%	1V / 100K	4100	0.16



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


05.05.2008




SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :


@ TEMP. RISE VS. DC SUPERPOSITION RESPONSE CURVE

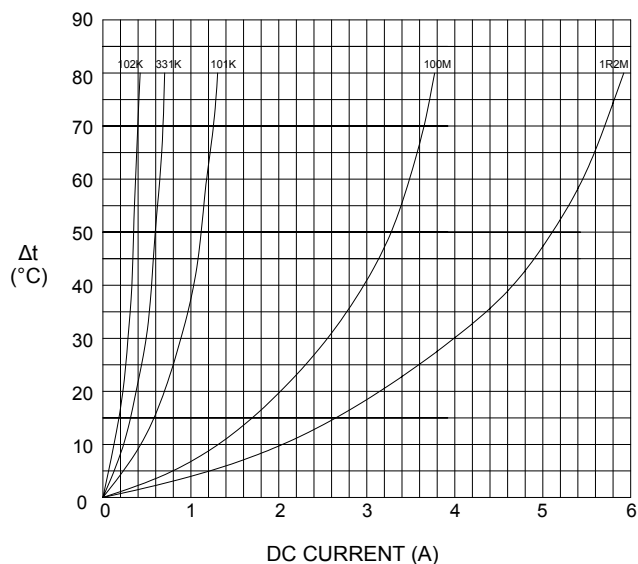

@ INDUCTANCE VS. FREQUENCY RESPONSE CURVE

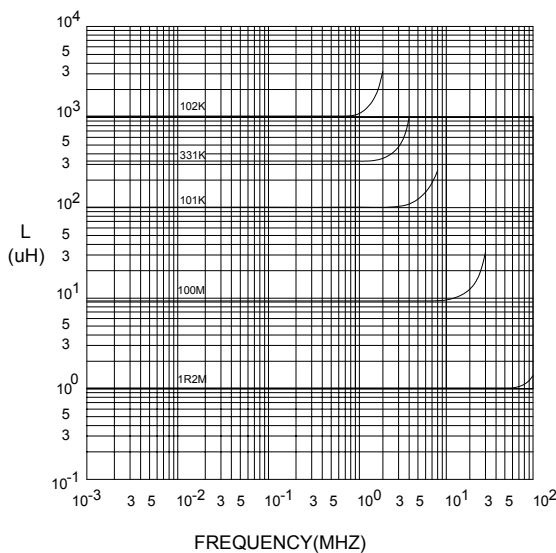

@ INDUCTANCE VS. DC SUPERPOSITION RESPONSE CURVE

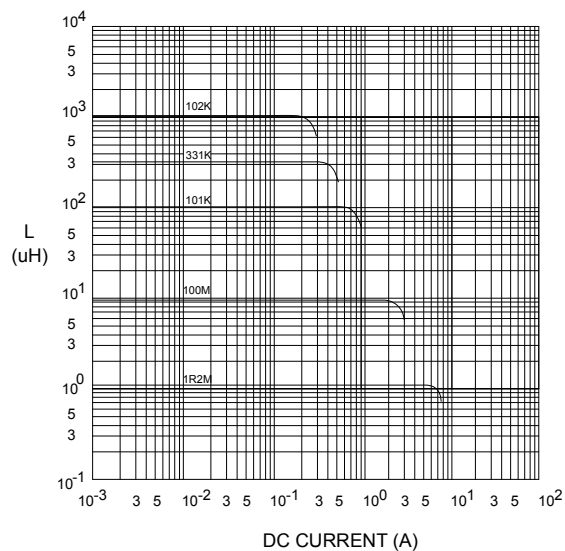

NOTE : Specifications subject to change without notice. Please check our website for latest information.



RoHS Compliant


05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD


PG. 3

RECOMMENDED SOLDERING CONDITIONS REFLOW SOLDERINGS

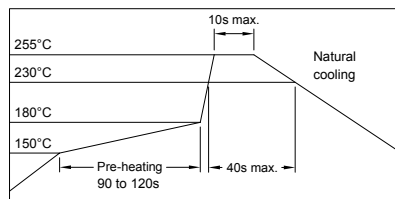


8. PACKAGING INFORMATION :

(1) CONFIGURATION

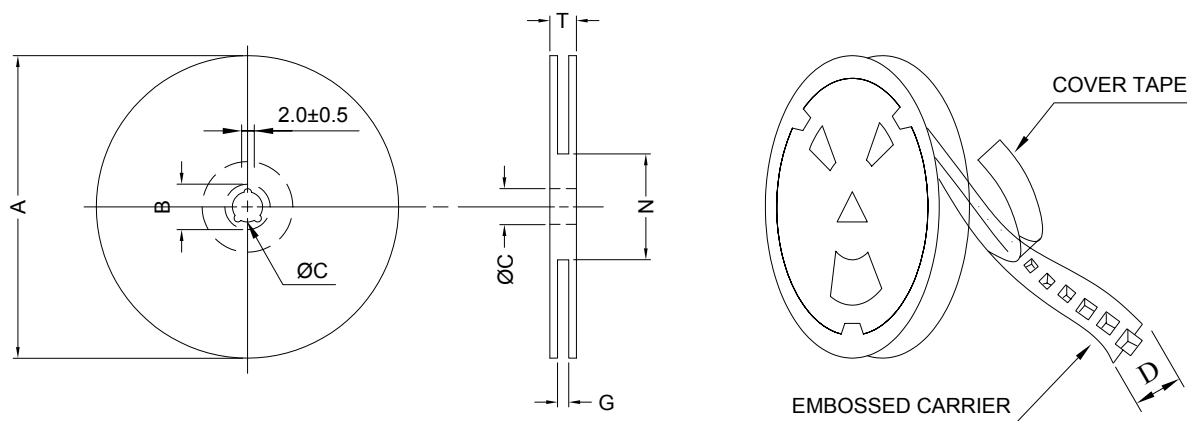

* CARRIER TAPE WIDTH : D

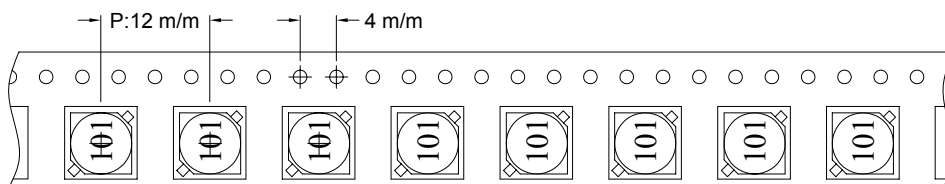

(2) DIMENSIONS

Unit: m/m

STYLE	A	B	C	D	G	N	T
13-16	330	21±0.8	13	16	18 ⁺⁰	50 ⁻⁰	22.4

(3) Q'TY & G.W. PER PACKAGE

SERIES	INNER : REEL			OUTER : CARTON		
	Q'TY (PCS)	G.W. (gw)	STYLE	Q'TY (PCS)	G.W. (Kg)	SIZE (cm)
PSB0605	1000	700	13-16	6000	7.7	40 x 40 x 24



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

9. RELIABILITY AND TEST CONDITION :

TEST ITEM	SPECIFICATION	TEST CONDITION
SOLDERABILITY	MORE THAN 90% OF THE TERMINAL ELECTRODE SHALL BE COVERED WITH FRESH SOLDER.	PREHEAT : 125±25°C FOR 60 SECONDS SOLDER : 99%Sn/0.3%Ag/0.7%Cu OR EQUIVALENT SOLDER TEMP. : 245±5°C FLUX : ROSIN DIP TIME : 4±1 SECONDS
THERMAL SHOCK TEST (TEMP. CYCLE)	INDUCTANCE SHALL NOT CHANGE MORE THAN ±20%	ROOM TEMP. → -25±2°C 15 MINUTES 30 MINUTES ROOM TEMP. → 85±2°C 15 MINUTES 30 MINUTES TOTAL : 50 CYCLES
HUMIDITY RESISTANCE TEST		TEMPERATURE : 40±2°C HUMIDITY : 90 ~ 95% APPLIED CURRENT : PER SPEC. TIME : 500 HOURS
HIGH TEMP. RESISTANCE TEST		TEMPERATURE : 85±2°C APPLIED CURRENT : PER SPEC. TIME : 500 HOURS



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

10. UL CARD :

OBMW2

November 30, 2000

Magnet Wire - Component

PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD

E201757

607 BAOLONG INDUSTRIAL ESTATE LONGGANG, SHENZHEN

GUANGDONG CHINA

Mtl Dsg	BC	Coating Type	TC	ANSI Type	TI
UEW/U		Polyurethane	—	—	130
PEW/U		Polyester	—	MW5-C	155°C
PEWH/U		Modified Polyester	—	MW30-C	180
PEW-NY/U		Polyester	Polyamide	MW24-C	155
HAI/U		Polyester(Amide)(Imide)	Polyamideimide	MW35,73	200
UEW-NY/U		Polyurethane	Polyamide	MW80-C	155
				MW28-C	130

Marking: Company name and material designation or marked designation on package or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions

1/3/2001

Underwriters Laboratories Inc.

Card 1 of 2

SUMITOMO CHEMICAL CO LTD										E54705 (M)	
5-33 KITAHAMA 4-CHOME CHUO-KO, OSAKA JAPAN											
Mtl Dsg	Col	Min Thk mm	UL94 Flame Class	Elec	RTI Mech with Imp	w/o Imp	H W I	H A I	H V T R	D 4 9 5	C T I
Liquid crystal polyester (LCP), designated "EKONOL" or "SUMIKASUPER", furnished in the form of pellets, (Contd)											
E4008, E400X	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
E4008	NC , WT , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
E4010	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
E400(Y)L, E4008L	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
E4810	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	0	4	—	—	—
		1.5	94V-0	130	130	130	0	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
(X) Denotes any number 1 thru 9.											
(Y) Denotes any number 1 thru 7.											



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD