



Wall Industries, Inc.

PSANC Series

15 Watt

Single, Dual, and Triple Outputs
AC/DC Converter for PCB Mount

FEATURES

- Compact Size
- High Efficiency
- Regulated Output
- Universal Input Range
- CE, cUL, TUV Approval
- Single, Dual, and Triple Outputs



SPECIFICATIONS: PSANC Series

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

INPUT SPECIFICATIONS	
Input Voltage Range	90 ~ 260VAC
Input Frequency	47 to 440Hz
OUTPUT SPECIFICATIONS	
Output Voltage	See Table
Output Power Range	15 Watts max.
Voltage Accuracy	±2%
Line Regulation (LL – HL)	Single & Dual Outputs: ±0.5%; Triple Output: 5V (±1%), 12V & 15V (±5%)
Load Regulation (10% to 100% Full Load)	Single Output: ±0.5%; Dual Output: ±3%; Triple Output: 5V (±2%), 12V & 15V (±5%)
Output Current	See Table
Ripple (Vp-p)	0.2% +40mV max
Noise (Vp-p)	0.5% +50mV max
Temperature Coefficient	±0.02%/°C
PROTECTION	
Short Circuit Protection	Continuous
GENERAL SPECIFICATIONS	
Switching Frequency	100KHz
Efficiency	See Table
Isolation Voltage (Input to Output)	3000VAC
Isolation Resistance	10GΩ min.
ENVIRONMENTAL SPECIFICATIONS	
Operating Temperature	-25°C to +71°C
Storage Temperature	-40°C to +85°C
Cooling	Free air convection
PHYSICAL SPECIFICATIONS	
Case Material	P.B.T. and Fiberglass
Weight	140g
Dimensions	2.91(L) x 2.13(W) x 0.87(H) inches (74.0(L) x 54.0(W) x 22.0(H) mm)
SAFETY & EMC	
Agency Approvals	CE, cUL, TUV



Wall Industries, Inc.

PSANC Series

15 Watt

Single, Dual, and Triple Outputs
AC/DC Converter for PCB Mount


OUTPUT VOLTAGE / CURRENT RATING CHART

Model Number	Input Voltage	Output Voltage	Output Current	Efficiency
PSANC-5S	90 –260 VAC	5 VDC	3000mA	75%
PSANC-12S	90 –260 VAC	12 VDC	1250mA	80%
PSANC-15S	90 –260 VAC	15 VDC	1000mA	80%
PSANC-24S	90 –260 VAC	24 VDC	625mA	84%
PSANC-5D	90 –260 VAC	+5 VDC - 5 VDC	+1500mA -1500mA	75%
PSANC-12D	90 –260 VAC	+12 VDC -12 VDC	+650mA -650mA	79%
PSANC-15D	90 –260 VAC	+15 VDC -15 VDC	+500mA -500mA	79%
PSANC-5S12D	90 –260 VAC	+5 VDC +12 VDC -12 VDC	2000mA +200mA -200mA	75%
PSANC-5S15D	90 –260 VAC	+5 VDC +15 VDC -15 VDC	2000 +150mA -150mA	75%

NOTES

1. Dimensions of the mechanical drawing are shown in millimeters.
2. Weight of the unit is 140 grams.

DERATING CURVE

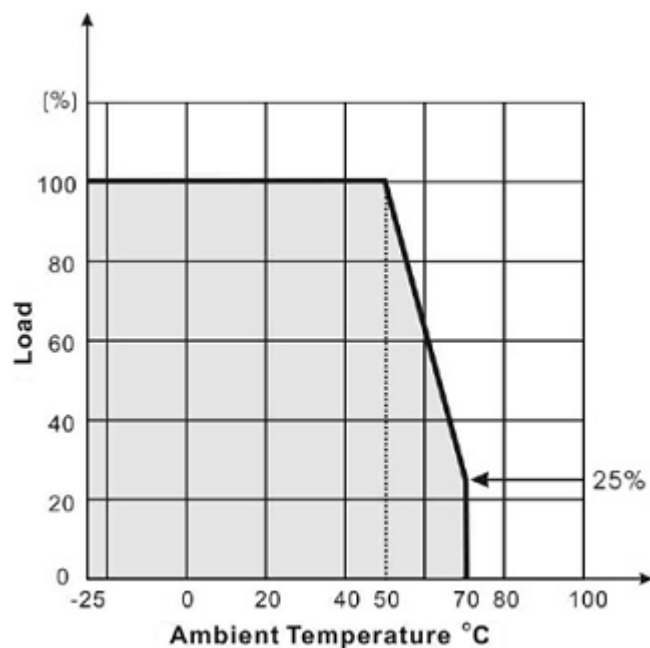




Wall Industries, Inc.

PSANC Series

15 Watt

Single, Dual, and Triple Outputs
AC/DC Converter for PCB Mount

MECHANICAL DRAWING

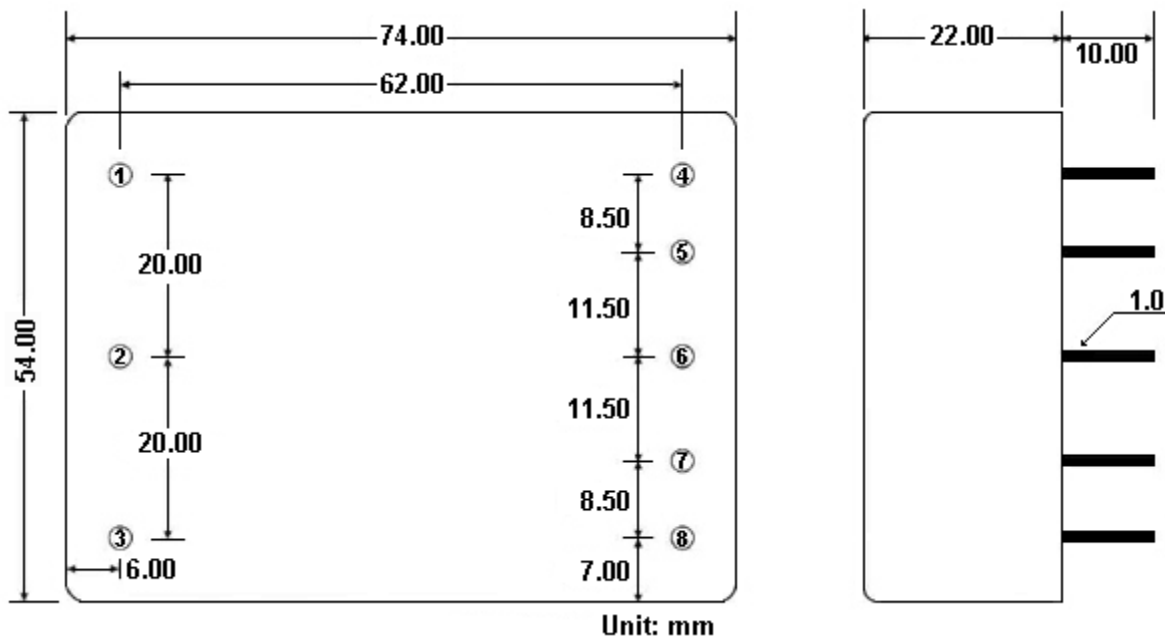

PIN CONNECTIONS			
PIN #	SINGLE	DUAL	TRIPLE
1	FG	FG	FG
2	AC IN	AC IN	AC IN
3	AC IN	AC IN	AC IN
4	NO PIN	NO PIN	-DC OUT
5	-DC OUT	-DC OUT	COMMON
6	NO PIN	COMMON	+DC OUT
7	+DC OUT	+DC OUT	COMMON
8	NO PIN	NO PIN	+5V OUT