

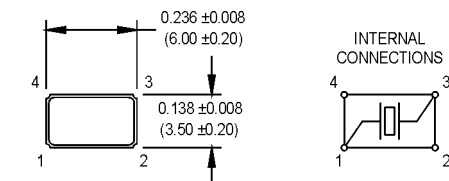



PP Surface Mount Crystals


3.5 x 6.0 x 1.2 mm



0.047 (1.20) MAX




All dimensions
in inches (mm).



ACTUAL SIZE



SUGGESTED SOLDER PAD LAYOUT



Available Stabilities vs. Temperature

T \ S	C	D	F	G	J	M
1	N	A	A	A	A	A
2	A	A	A	A	A	A
3	N	A	A	A	A	A
4	N	N	N	N	A	A
5	N	N	N	N	A	A
6	N	N	N	A	A	A

A = Available
N = Not Available

Ordering Information

Product Series	PP	1	M	M	XX	00.0000 MHz
Temperature Range	1: 0°C to +70°C	2: -10°C to +60°C	3: -20°C to +70°C	4: -30°C to +60°C	5: -20°C to +80°C	6: -40°C to +85°C
Tolerance	D: ±10 ppm	J: ±30 ppm	F: ±15 ppm	M: ±50 ppm	G: ±20 ppm	H: ±25 ppm
Stability	C: ±5 ppm	D: ±10 ppm	F: ±15 ppm	G: ±20 ppm	H: ±25 ppm	J: ±30 ppm
Load Capacitance	Blank: 18 pF (std)	S: Series Resonant	XX: Customer Specified 10 pF to 32 pF	Frequency (customer specified)		

Electrical/Environmental Specifications

PARAMETERS	VALUE
Frequency Range*	10.000 to 180.000 MHz
Tolerance @ +25°C	See Table Above
Stability	See Table Above
Aging	±2 ppm/yr. Max.
Shunt Capacitance	5 pF Max.
Load Capacitance	See ordering information
Standard Operating Conditions	See Table Above
Storage Temperature	-40°C to +85°C
Equivalent Series Resistance (ESR), Max.	
Fundamental (AT-cut)	
10.000 to 12.999 MHz	80 Ω Max.
13.000 to 13.999 MHz	50 Ω Max.
14.000 to 19.999 MHz	40 Ω Max.
20.000 to 45.000 MHz	30 Ω Max.
Third Overtones (AT-cut)	
40.000 to 150.000 MHz	50 Ω Max.
Fifth Overtones (AT-cut)	
100.000 to 180.000 MHz	90 Ω Max.
Drive Level	100 μW Max.
Mechanical Shock	MIL-STD-202, Method 213, C
Vibration	MIL-STD-202, Method 201 & 204
Thermal Cycle	MIL-STD-883, Method 1010, B

*Because this product is based on AT-strip technology, not all frequencies in the range stated are available. Contact the factory for availability of specific frequencies.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

Revision: 02-28-07

MtronPTI Lead Free Solder Profile

