



TRIPLE COMMON CATHODE TRANSIENT VOLTAGE SUPPRESSOR ARRAY

This Transient Voltage Suppressor is intended to protect sensitive equipment against ElectroStatic Discharge and transient events featuring low clamping voltage and low leakage current suitable for communication transmission line port protection in industrial, consumer, computing and networking applications.


SPECIFICATION FEATURES

- Working Peak Reverse Voltage of 36V
- Max Power Dissipation of 350W, 8/20µs
- Maximum Leakage Current of 1µA
- IEC61000-4-2 Compliance 15kV Air, 8kV Contact Discharge
- Max capacitance 200pF at 0Vdc 1MHz
- SOT143 Package
- 100% Tin Matte lead finish (RoHS Compliant)

APPLICATIONS

- Industrial Control Communication Port
- Portable Consumer Electronics
- Instrumentation Equipment



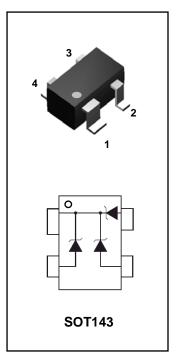

MAXIMUM RATINGS

Rating	Symbol	Value	Units
Peak Pulse Power 8/20µs Waveform	P _{pp}	350	W
ESD Voltage (HBM)	V _{ESD}	>25	kV
Operating Temperature Range	TJ	-55 to +150	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C
Lead Soldering Temperature (max 10 s)	ΤL	260	°C


ELECTRICAL CHARACTERISTICS Ti = 25°C


Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	V_{WRM}				36	V
Reverse Breakdown Voltage	V_{BR}	I _{BR} = 1mA	40			V
Reverse Leakage Current	I _R	$V_R = 36V$			1	μΑ
Clamping Voltage (8/20µs)	V _c	$I_{pp} = 1A$			55	V
Clamping Voltage (8/20µs)	V _c	$I_{pp} = 5A$			75	V
Maximum Peak Pulse Current	I _{pp}	8/20 µs Waveform			5	Α
Off State Junction Capacitance	Cj	0 Vdc Bias f = 1MHz Between pins 2,3,4 and 1			120	pF





PACKAGE AND SUGGESTED PAD LAYOUT DIMENSIONS

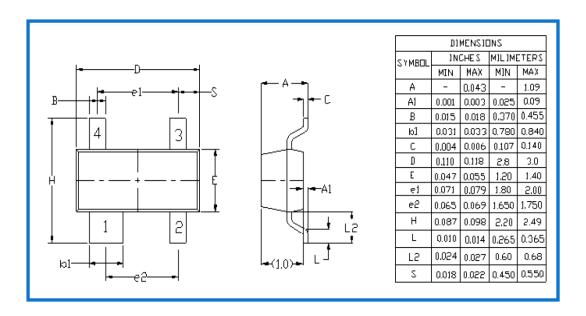



© Copyright PanJit International, Inc 2006

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.