

### Specifications

|                        |                                  |
|------------------------|----------------------------------|
| Insulation Resistance: | 1,000M $\Omega$ min. at 500V DC  |
| Withstanding Voltage:  | 500V ACrms for 1 minute          |
| Contact Resistance:    | 100m $\Omega$ at 1mA / 20mV max. |
| Voltage Rating:        | 50Vrms AC                        |
| Current Rating:        | 0.5A                             |
| Operating Temp. Range: | -25°C to +85°C                   |
| Mating Cycles:         | 10,000 (office environment)      |

### Part Number (Details)

PJS 008 - 1000

Series No.

Number of Contacts

Design No.

### Materials and Finish


|            |                    |
|------------|--------------------|
| Insulator: | PC (black)         |
| Card Lock: | SUS                |
| Shell:     | SUS, Plating Ni-Au |

### Features

- microSD plus adapter is compatible to all miniSD card specifications
- Easy handling of microSD
- Tray packaging



### Outline Dimensions for PJS008-1000

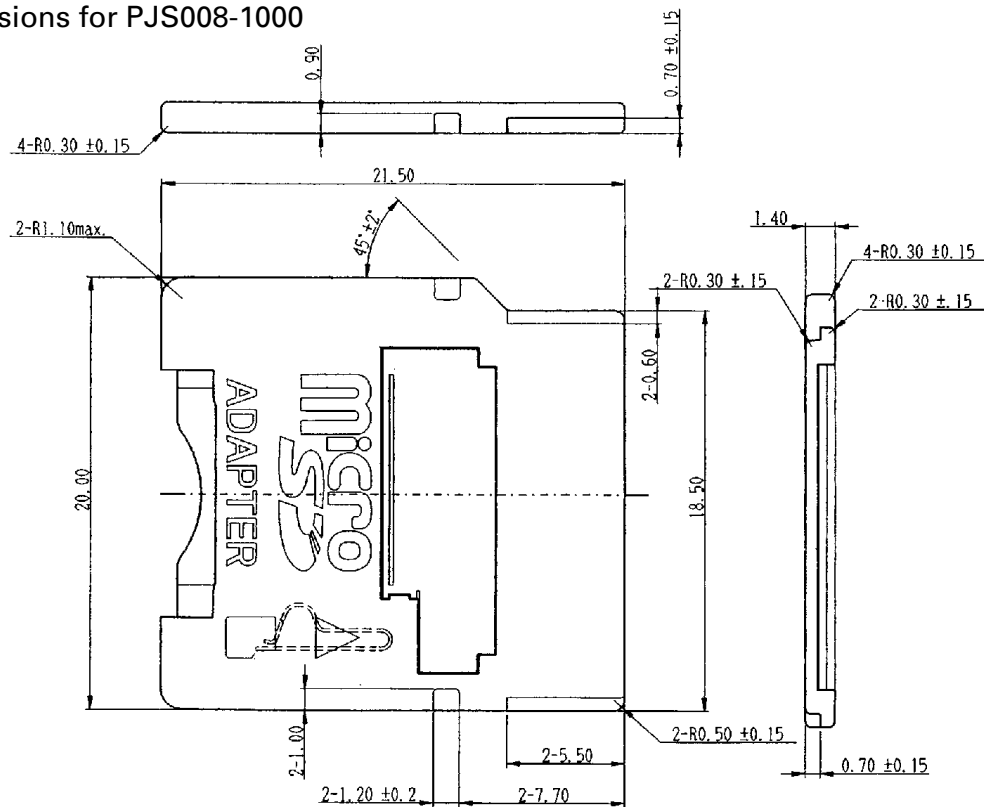

### Contact Area Detail

