

MURS140 - MURS160

PRV : 400 - 600 Volts

Io : 1.0 Ampere


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Ultra Fast Recovery Time
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : SMB Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Lead Formed for Surface Mount
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.093 gram

SURFACE MOUNT ULTRA FAST RECTIFIERS

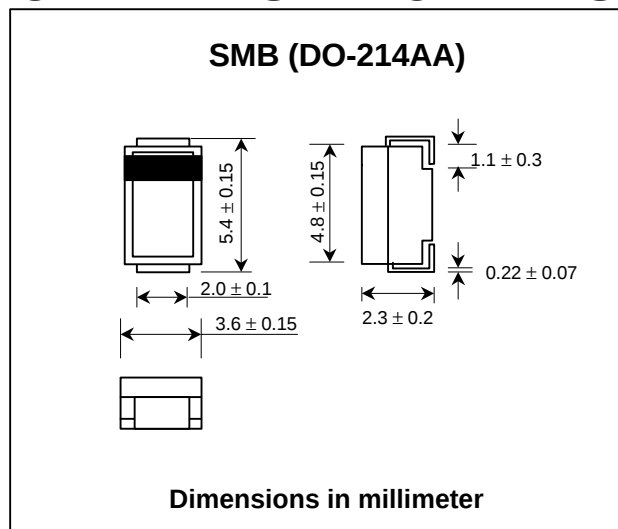

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	MURS140	MURS160	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	400	600	V
Maximum Working Peak Reverse Voltage	V_{RWM}	400	600	V
Maximum DC Blocking Voltage	V_{DC}	400	600	V
Maximum Average Forward Current $T_L = 150\text{ }^{\circ}\text{C}$ See Fig. 1 $T_L = 125\text{ }^{\circ}\text{C}$	$I_{F(AV)}$	1.0 2.0		A
Maximum Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	35		A
Maximum instantaneous Forward Voltage (1)	V_F	1.25 1.05		V
Maximum Instantaneous Reverse Current at Rated DC Blocking Voltage(1) $T_J = 25\text{ }^{\circ}\text{C}$	I_R	5		μA
$T_J = 150\text{ }^{\circ}\text{C}$	$I_{R(H)}$	150		μA
Maximum Reverse Recovery Time (2)	T_{rr}	50		ns
Operating Junction and Storage Temperature Range	T_J, T_{STG}	- 65 to + 175		$^{\circ}\text{C}$


Notes :

(1) Pulse Test : Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$

(2) Reverse Recovery Test Conditions : $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$; $I_{rr} = 0.25\text{ A}$

RATING AND CHARACTERISTIC CURVES (MURS140 ~ MURS160)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

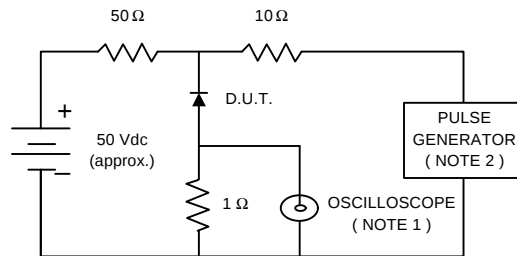

NOTES : 1. Rise Time = 7 ns max., Input Impedance = 1 megaohm, 22 pF.
2. Rise Time = 10 ns max., Source Impedance = 50 ohms.
3. All Resistors = Non-inductive Types.

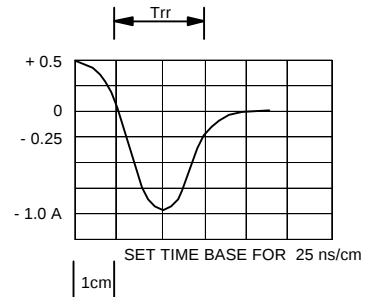


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

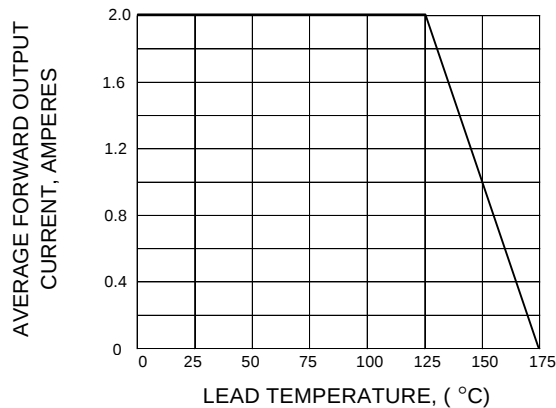


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

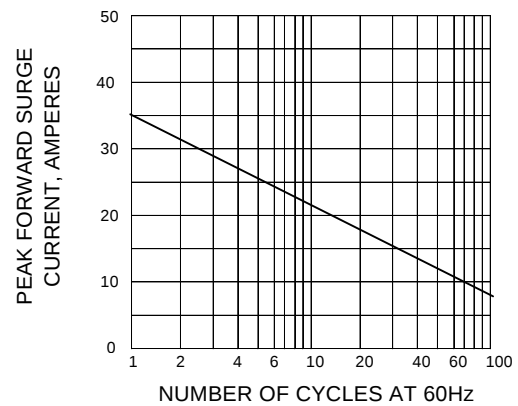


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

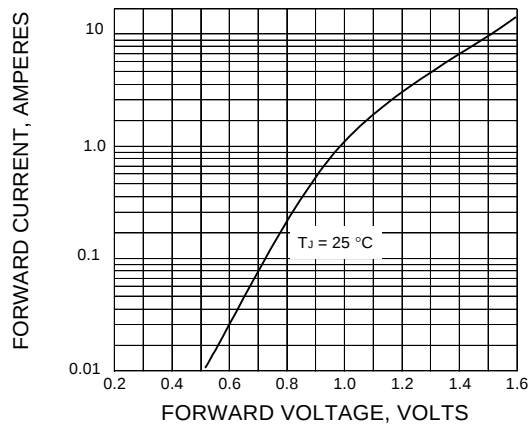


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

