

# C&K TDA Series

## Ultra-miniature Surface Mount Half-pitch DIP Switches

### Features/Benefits

- Bifurcated contact for increased electrical reliability
- Tin-lead plated terminals for reliable solder coverage
- Process sealed for surface mount soldering and washable processing

### Typical Applications

- Hand-held electronic devices
- Portable computer and electronic devices
- Instrumentation and controls



H

DIP

### How To Order

Complete part numbers for TDA Series are shown below. All switches supplied in "OFF" position.

### Specifications

SWITCH FUNCTION: SPST – 2, 4, 6, 8 & 10 positions.

CONTACT RATING:

24 V DC, 25 mA (switching).

50 V DC, 100 mA (steady state).

MECHANICAL AND ELECTRICAL LIFE: 1,000 cycles.

CONTACT RESISTANCE: 100 milliohms max.

INSULATION RESISTANCE: 100 megohms @ 100 V DC min.

DIELECTRIC STRENGTH: 300 V AC min.

STORAGE TEMPERATURE: -40°C to 85°C.

OPERATING TEMPERATURE: -20°C to 85°C.

SOLDERABILITY: Per MIL-STD-202F method 208D, or

EIA RS-186E method 9 (1 hour steam aging).

PACKAGING: Switches supplied in rigid dispensing tubes in full tube quantities only, this may affect order quantity. Numbers of switches per tube varies with model. Tape and reel packaging also available.

### Materials

CASE & COVER: glass filled PPA (UL94V-0).

ACTUATOR: LCP (UL94V-0).

CONTACTS: Copper alloy, with gold plate over nickel plate.

TERMINALS: Copper alloy, with tin-lead alloy over nickel plate.

All terminals are insert molded.

TAPE SEAL: Polyamide.


**NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

### Tube Package

| PART NUMBER       | NO. POS. | DIM. 'A'     | QUANTITY PER TUBE |
|-------------------|----------|--------------|-------------------|
| <b>TDA02H0SK1</b> | 2        | .144 (3,67)  | 125               |
| <b>TDA04H0SK1</b> | 4        | .244 (6,21)  | 70                |
| <b>TDA06H0SK1</b> | 6        | .344 (8,75)  | 50                |
| <b>TDA08H0SK1</b> | 8        | .444 (11,29) | 40                |
| <b>TDA10H0SK1</b> | 10       | .544 (13,83) | 30                |

Schematic


SPST

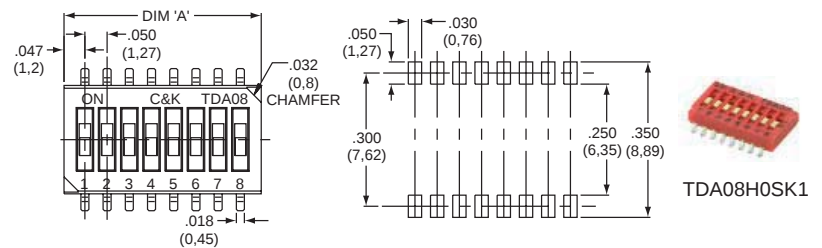

TDA08H0SK1

### Tape & Reel Package

| PART NUMBER        | NO. POS. | DIM. 'W'    | QUANTITY PER REEL |
|--------------------|----------|-------------|-------------------|
| <b>TDA02H0SK1R</b> | 2        | .630 (16,0) | 2000              |
| <b>TDA04H0SK1R</b> | 4        | .630 (16,0) | 2000              |
| <b>TDA06H0SK1R</b> | 6        | .630 (16,0) | 2000              |
| <b>TDA08H0SK1R</b> | 8        | .945 (24,0) | 2000              |
| <b>TDA10H0SK1R</b> | 10       | .945 (24,0) | 2000              |

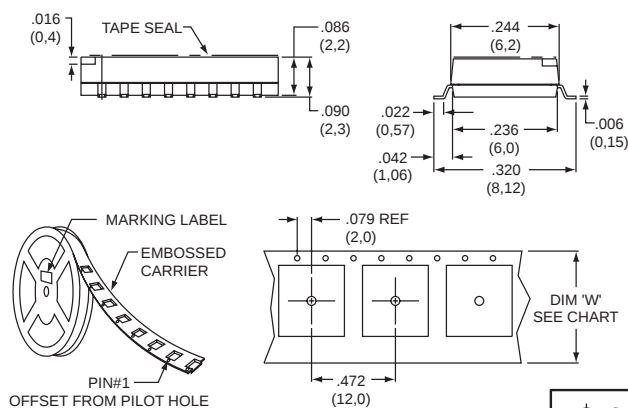

Third Angle Projection



Cannon

Dimensions are shown inch (mm)  
Dimensions subject to change

www.ittcannon.com