

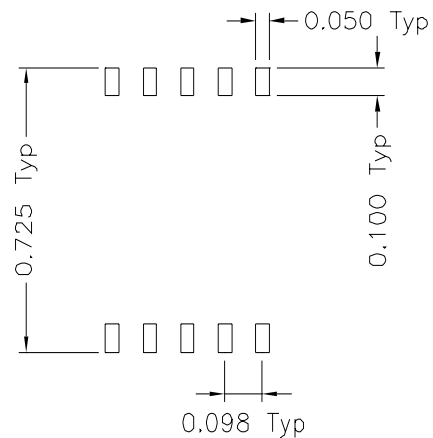


1. Mechanical Dimensions:

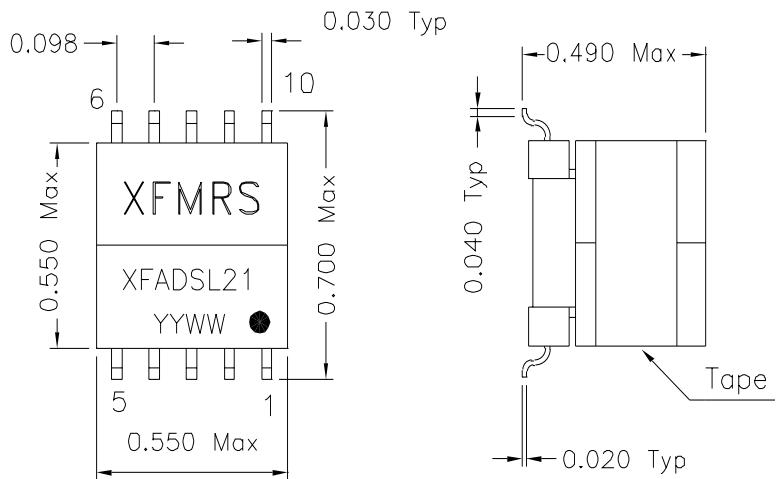

Suggested PCB Layout

2. Schematic:

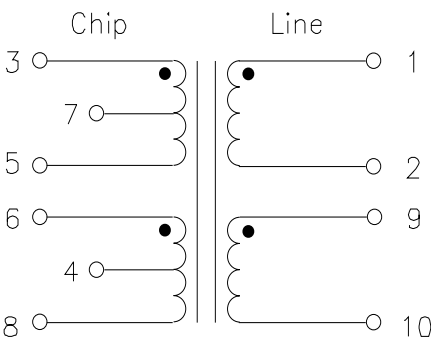

3. Electrical Specifications:

OCL: (Pins 1-10) 1.025mH $\pm 5\%$ 300KHz, .1V
Leakage L: (Pins 1-10) 10.0uH Max 300KHz, 0.1V
Short Pins 3-5-6-8, tie 2-9
Turns Ratio: (1-10):(3-8) 1CS:1CS $\pm 2\%$ Tie 5-6&2-9
DC Res: (Pins 3-5) 0.500 Ohms Max
DC Res.: (Pins 6-8) 0.500 Ohms Max
DC Res: (Pins 1-2) 0.500 Ohms Max
DC Res.: (Pins 9-10) 0.500 Ohms Max
HYPOT: 1500VAC Chip-Line
HYPOT: 1500VAC Wdgs-Core
Operating Temp.: -40 to +85°C

Specifications are subject to change without prior notice. DOC. REV: A/1

XFMRS Inc	Title: ADSL TRANSFORMER			
	UNLESS OTHERWISE SPECIFIED		P/N: XFADSL21	
	TOLERANCES:		REV. A	
	.xxx ± 0.010		DWN.	李清儿
	Dimensions in INCH		CHK.	孙小悦
SHEET 1 OF 1		APP.	Joe Huff	May-02-00