



1. Dimensions:

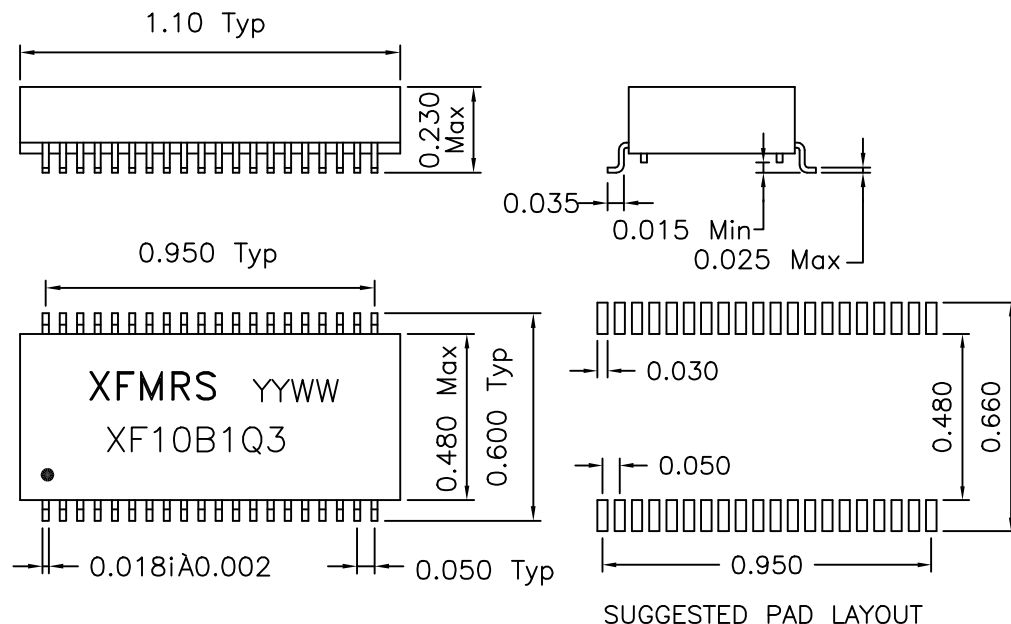

2. Schematic:

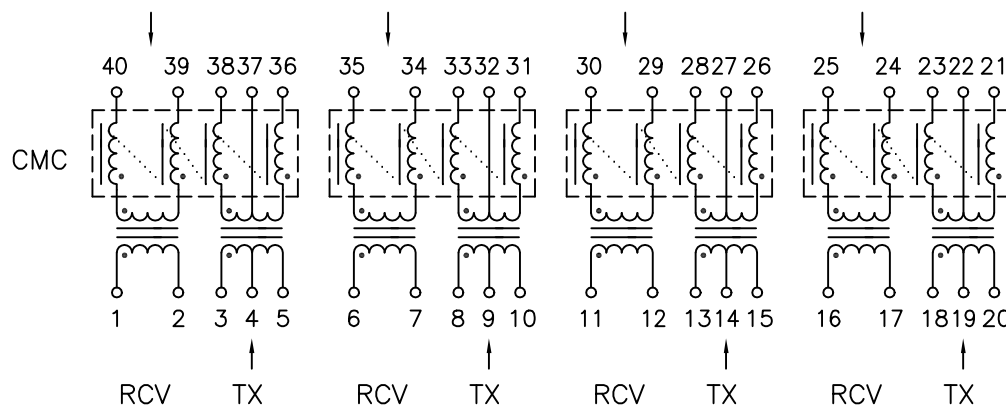

DOC.REV C/1

3. Electrical Specifications: @25°C

Pri/Sec Isolation: 1500 Vrms

Insulation Resistance: 10,000M ohms

Turns Ratio: 1CT:1CT (TX)

Turns Ratio: 1 : 1 (RCV)

PRI OCL: 80uH Minimum (TX&RCV) @100KHz 50mV

Cw/w: 12pF Maximum (PRI/SEC) @100KHz 50mV

Leakage Inductance: 0.30uH Max @TX (SEC Shorted)

Leakage Inductance: 0.30uH Max @RCV (SEC Shorted)
@100KHz 50mV

PRI DC Resistance: 0.30 Ohms Max (TX & RCV)

CMR Choke OCL: 30uH Typical @100KHz 50mV

XFMRS Inc

Title:
Quad Ports 10BASE-T Modules

UNLESS OTHERWISE SPECIFIED
TOLERANCES:
.xxx ±0.010
Dimensions in INCH

P/N: XF10B1Q3

REV. C

DWN.

廖玉坤

Jul-20-00

CHK.

李清儿

Jul-20-00

APP.

Joe Huff

Jul-20-00