

Clipped Sinewave, 4 Pad FR4 substrate SMD

- **Industry-standard SMD package 11.4 x 9.6 x 2.5mm**
- **Close tolerance stabilities from $\pm 0.5\text{ppm}$ over 0° to $+50^\circ\text{C}$**
- **$\pm 1\text{ppm}$ over -40 to $+85^\circ\text{C}$**
- **Low power consumption**
- **RoHS compliant**



DESCRIPTION

EM42GS series TCXOs are packaged in the industry-standard 11.4 x 9.6 x 2.5mm SMD package. With clipped sinewave output, close tolerances are available from $\pm 0.5\text{ppm}$ over 0° to 50°C or $\pm 1\text{ppm}$ over -40° to $+85^\circ\text{C}$. The part has low power consumption.

SPECIFICATION

Product Series Code	TCXO: VCTCXO:	EM42GS VEM42GS
Frequency Range:	10.0MHz to 27.0MHz	
Output Waveform:	Clipped Sinewave	
Initial Calibration Tolerance**:	<±1ppm at 25°C	
Standard Frequencies:	10.0, 12.80, 13.0, 14.40, 15.36, 16.384, 19.2, 19.440, and 19.68MHz (Partial list)	
Operating Temperature Range:	See table	
Frequency Stability		
vs. Ageing:	±1.0 ppm max. first year	
vs. Voltage Change:	±0.3 ppm max. ±5% change	
vs. Load Change:	±0.3 ppm max. ±10% change	
vs. Reflow:	±1ppm max. for one reflow (Measured after 24 hours)	
Supply Voltage:	+2.8, +3.0 or +5.0Volts (Specify when ordering)	
Output Voltage Level:	0.8V p-p minimum	
Start-up Time:	2ms typical, 5ms max.	
Current Consumption:	See table below	
Output Load:	10kOhm//10pF ±10%	
Harmonic Distortion:	-10dB typical, -7dB max.	
SSB Phase Noise:	See table	
Output Format:	DC block, AC coupled	
Storage Temperature:	-50° to +100°C	

FREQUENCY STABILITY


Frequency Stability (ppm)		±0.5	±1.0	±1.5	±2.0	±2.5
Temperature Range (°C)	0 ~ +50	ASK	✓	✓	✓	✓
	-10 ~ +60	x	✓	✓	✓	✓
	-20 ~ +70	x	x	✓	✓	✓
	-30 ~ +75	x	x	x	✓	✓
	-40 ~ +85	x	x	x	x	✓

✓ = available, x = not available, ASK = call Technical Sales

CURRENT CONSUMPTION

Frequency Range	+3.0 V	+5.0 V
10.0MHz to 13MHz	1.3mA	2.0mA
13.1MHz to 20MHz	1.5mA	2.2mA
20.1MHz to 27MHz	2.0mA	2.5mA

EM42GS - OUTLINES AND DIMENSIONS

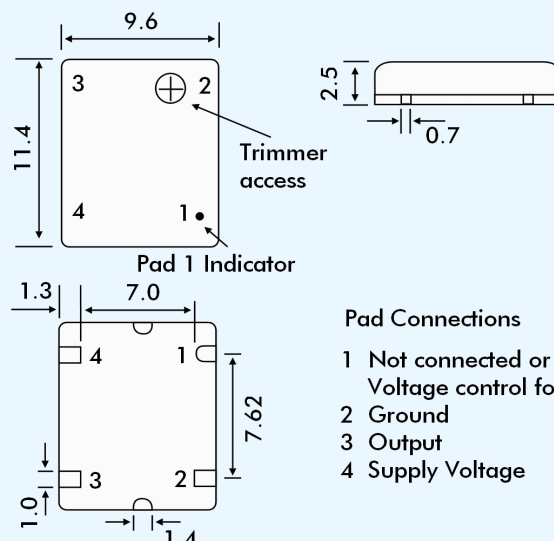

VEM42GS VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Standard = +1.5±1.0Volts for all input voltages. (<i>Contact technical sales if +2.5±2.0 Volts is required.</i>)
Frequency Deviation:	±6.0 ppm min.
Slope Polarity:	Positive (<i>increase of control voltage increases output frequency.</i>)
Input Impedance:	1.0MΩ min.
Modulation Bandwidth:	3.0kHz min. measured at -3dB
Linearity:	10% max.

PHASE NOISE

SSB Phase Noise at 25°C	Offset (Hz)	10	100	1k	10k	100k
	EM42G5 13MHz (dBc/Hz)	-80	-115	-135	-148	-150

PART NUMBERING PROCEDURE

Example:

EM42GS3-19.44-2.5/-30+75

Series Description

TCXO = EM42GS

VCTCXO = VEM42GS

Supply Voltage

$$28 = 2.8 \text{ VDC}$$
 $3 = 3.0 \text{ VDC}$

5 = 5.0 VDC

Frequency (MHz)

Stability over OTR ($\pm$ ppm)

Operating Temperature Range (OTR) (°C)

Lower and upper limits.