



1. Dimensions:

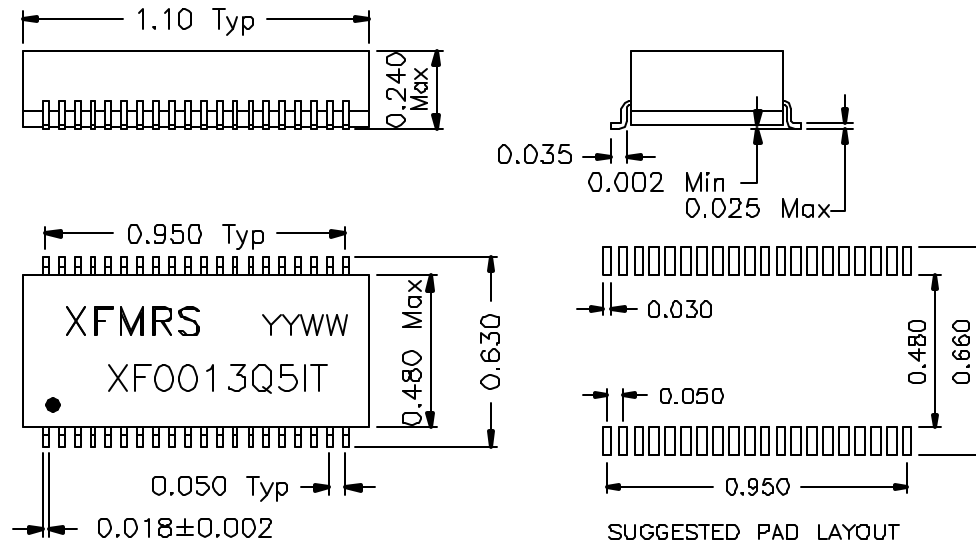

2. Schematic:

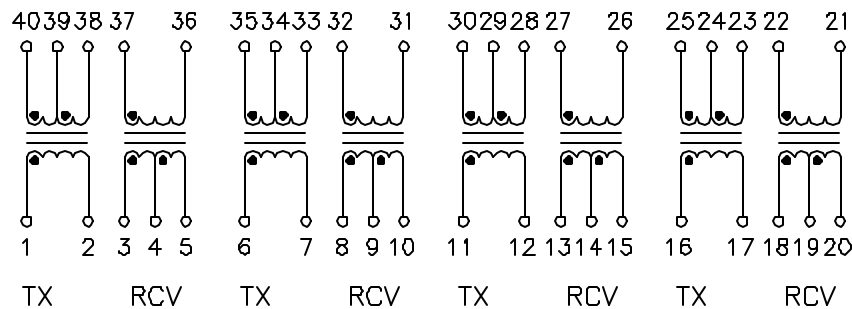

DOC. REV A/1

3. Electrical Specifications: @25°C

Isolation: 1500 Vrms (PRI to SEC)

TX Turns Ratio: 1:2CT ±3% (PRI:SEC)

RCV Turns Ratio: 1:1CT ±3% (PRI:SEC)

PRI OCL. 1.20mH Minimum @100KHz 100mV

Cw/w: 20pF Maximum @100KHz 100mV (PRI/SEC)

LL: 10uH Maximum @100KHz 100mV

PRI PINS: P1-2, P6-7, P11-12, P16-17

P21-22, P26-27, P31-32, P36-37

Operating Temperature: -40 to 85°C

XFMRS Inc	Title: T1/E1/CEPT QUAD PORT		
	P/N: XF0013Q5IT		REV. A
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	DWN. 廖玉坤	Jan-25-00
		CHK. 李清儿	Jan-25-00
SHEET 1 OF 1		APP. Joe Huff	Jan-25-00