

DATA SHEET

TX7.9/4/3.2
Alloy powder toroids

New data

2008 Sep 01

Alloy powder toroids

TX7.9/4/3.2

RING CORES (TOROIDS)

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(l/A)$	core factor (C1)	2.91	mm ⁻¹
V_e	effective volume	110	mm ³
l_e	effective length	17.9	mm
A_e	effective area	6.15	mm ²
m	mass of core (for μ_i 125)	MPP	0.92 g
		Sendust	0.68 g
		High-Flux	0.87 g

Coating


The cores are coated with epoxy. The colour is black (Sendust), grey (MPP) or khaki (High-Flux). Maximum operating temperature is 200 °C. Parylene coating is also available (transparent, maximum operating temperature 130 °C).

Isolation voltage

AC isolation voltage : 1000 V (Parylene : 750 V).

Contacts are applied on the edge of the ring core, which is also the critical point for the winding operation.

Ring core data - Note 1. Mechanical dimensions : OD $\leq$ 8.51, ID $\geq$ 3.43, H $\leq$ 3.81

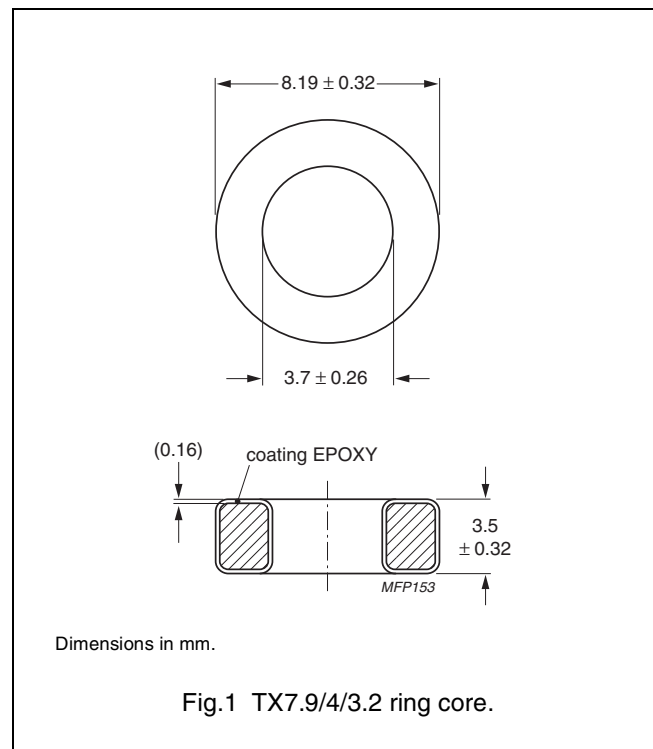

GRADE	A_L (nH)	μ_i	B (mT) at	CORE LOSS (W) at	TYPE NUMBER
			H = 100 kA/m; f = 10 kHz; T = 25 °C	f = 100 kHz; $\hat{B}$ = 100 mT; T = 25 °C	
MPP	6 ± 8 %	14	≥ 640	0.165	TX7.9/3.2-M2-A6
	11 ± 8 %	26	≥ 700	0.132	TX7.9/3.2-M2-A11
	25 ± 8 %	60	≥ 760	0.082	TX7.9/3.2-M2-A25
	52 ± 8 %	125	≥ 800	0.082	TX7.9/3.2-M2-A52
	62 ± 8 %	147	≥ 800	0.088	TX7.9/3.2-M2-A62
	66 ± 8 %	160	≥ 800	0.088	TX7.9/3.2-M2-A66
	73 ± 8 %	173	≥ 800	0.088	TX7.9/3.2-M2-A73
	83 ± 8 %	200	≥ 800	0.165	TX7.9/3.2-M2-A83
	124 ± 8 %	300	≥ 800	0.165	TX7.9/3.2-M2-A124
Sendust ⁽¹⁾	25 ± 12 %	60	≥ 1030	0.094	TX7.9/3.2-S7-A25-MC
	31 ± 12 %	75	≥ 1040	0.094	TX7.9/3.2-S7-A31-MC
	37 ± 12 %	90	≥ 1050	0.094	TX7.9/3.2-S7-A37-MC
	52 ± 12 %	125	≥ 1060	0.094	TX7.9/3.2-S7-A52-MC
High-Flux	6 ± 8 %	14	≥ 890	0.275	TX7.9/3.2-H2-A6
	11 ± 8 %	26	≥ 980	0.220	TX7.9/3.2-H2-A11
	25 ± 8 %	60	≥ 1280	0.198	TX7.9/3.2-H2-A25
	52 ± 8 %	125	≥ 1370	0.220	TX7.9/3.2-H2-A52
	62 ± 8 %	147	≥ 1385	0.242	TX7.9/3.2-H2-A62
	66 ± 8 %	160	≥ 1400	0.385	TX7.9/3.2-H2-A66

Alloy powder toroids

TX7.9/4/3.2

DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
Prototype		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in		These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support		These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.